

# Specifications

### **DESCRIPTION**

Three function transfer valve - 2 discrete outputs & 1 shared mode

### **OPERATION**

180° rotational control

### **CARTRIDGE**


116719 cartridge

### **STANDARDS**

 Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein


#### WARRANTY

- Lifetime limited warranty against leaks and drips to the original consumer purchaser
- 5 year warranty if used in commercial installations



## **3-Function Transfer Valve**

**Model:** 3372

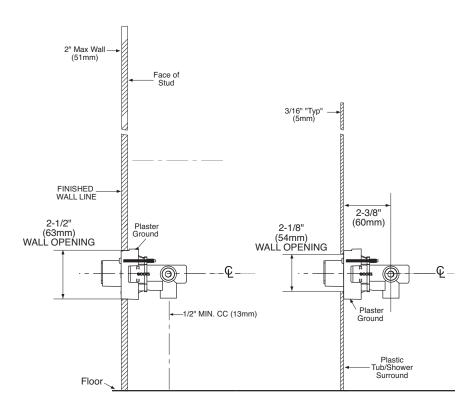

THICK WALL APPLICATION

**THIN WALL APPLICATION** 

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

0s/3s/2011 SPC10476 5000011532 Palescel 01



## **DESCRIPTION**

- Brass construction
- Pressure balancing, four port valve design with volume control and integral check stops, 1/2" CC or IPS connections

### **OPERATION**

- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintain selected discharge temperature to ± 2°F

### **CARTRIDGE**


- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

### **STANDARDS**

 Third party certified by CSA to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



MOENTROL® VALVE
Pressure-Balancing Valve with
Volume Control

Models: 3570 (CC),3550 (IPS) - Single Pack 63170 (CC), 63150 (IPS) - Bulk Packed (Bulk packed 12 per carton)

NOTE: See reverse side for illustrated parts

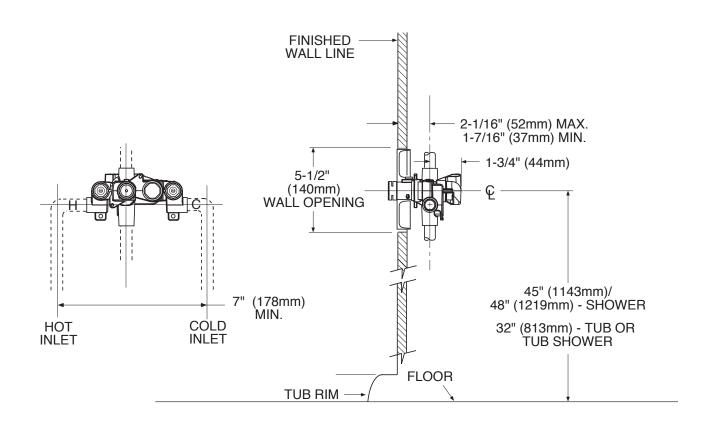

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)




## Specifications


### **DESCRIPTION**

- Metal construction with various finishes identified by suffix WARRANTY
- Warranted for one year against material or manufacturing defects



Models: A725 series

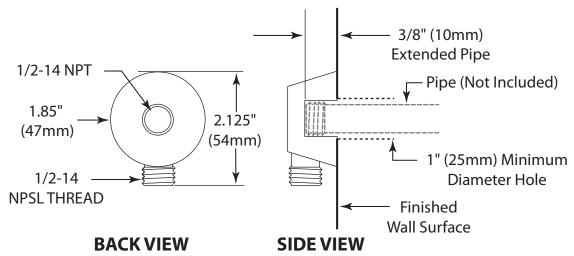

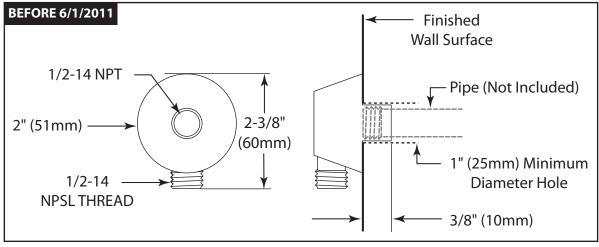

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



Buy it for looks. Buy it for life.®

## Specifications

### **FAUCET DESCRIPTION**

- Metal construction with chrome plated, antique nickel, oil rubbed bronze, wrought iron, LifeShine\* brushed nickel or antique bronze finishes
- Includes showerhead, arm and flange

## **OPERATION**

- Lever style handle with temperature indicator on the escutcheon, pull-on/push-off operation
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°

### **FLOW**

Showerhead limited to 2.5 gpm (9.5 L/min)

## **CARTRIDGE**

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

### **STANDARDS**

 Third party certified to ASME A112.18.1/CSA B-125.1, ICC A117.1 and all applicable requirements referenced therein


### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



KINGSLEY™ MOENTROL° Single-Handle Shower Trim Only

**Models:** T3112, T3112BN, T3112WR, T3112AN, T3112ORB, T3112AZ

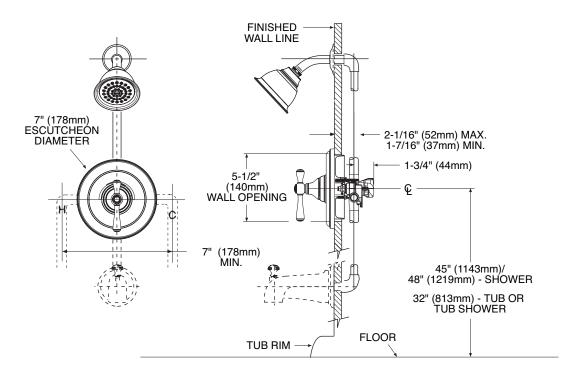

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com



Buy it for looks. Buy it for life.®

#### **DESCRIPTION**

- · Metal construction with various finishes identified by suffix **OPERATION**
- Rotational control with 180° of rotation with stops


### **STANDARDS**

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- ADA ( for lever handle

## **WARRANTY**

- · Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


# **Specifications**




Kingsley™ Multi-Function **Transfer Valve Trim Kit** Models: T4311 series

**Valve:** 3372 or 3375

## **Thick Wall Installation**

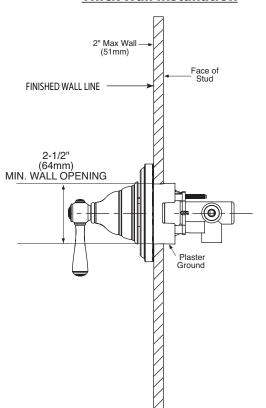

## **Thin Wall Installation**

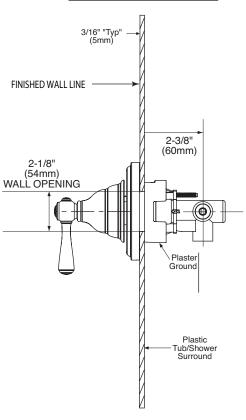



4-9/32 (109mm)

**CRITICAL DIMENSIONS** 

(DO NOT SCALE)

1/14