




Fireplace Inserts • Patioflames • Gas Fireplaces • Waterfalls • Wood Stoves
Casual Furniture • Electric Fireplaces • Outdoor Fireplaces • Gourmet Gas Grills

Peace of Mind

Time after time, Napoleon® has led the way with new and innovative, patented technology. We are proud to say that our products continuously surpass industry standards and our inspiration is you!

We want you to feel confident in choosing Napoleon® for your home. Our products are designed to provide that confidence and ensure that every Napoleon® is beyond compare! Your authorized Napoleon® dealer will customize your home comfort specifically for you – guaranteed satisfaction.

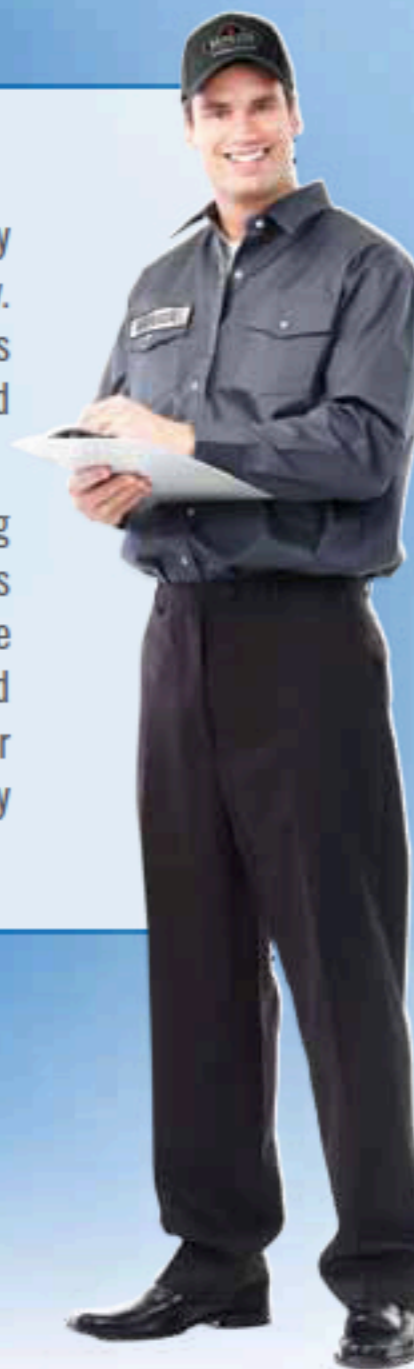

- 24 Napoleon Road, Barrie, Ontario, Canada L4M 0G8
- 103 Miller Drive, Crittenden, Kentucky, USA 41030
- 7200, Route Transcanadienne, Montréal, Québec H4T 1A3

Tel: 705-721-1212 Fax: 705-722-6031
napoleonheatingandcooling.com

SPECIFICATIONS

HEATING CAPACITIES

| 9500 SERIES | NPX045S2A | NSM045S2A | NPX060S3A | NSM060S3A | NPX080S3A | NSM080S3A | NPX100S5A | NSM100S5A | NPX120S5A | NSM120S5A |
|-----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Motor | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC |
| Efficiency (AFUE) | 95% | 95% | 95% | 95% | 95% | 95% | 95% | 95% | 95% | 95% |
| Input BTU/hr 0-4500' | 45,000 | 45,000 | 60,000 | 60,000 | 80,000 | 80,000 | 100,000 | 100,000 | 120,000 | 120,000 |
| Output BTU/hr 0-4500' | 42,750 | 42,750 | 57,000 | 57,000 | 76,000 | 76,000 | 95,000 | 95,000 | 114,000 | 114,000 |

CABINET DIMENSIONS (INCHES)

| 9500 SERIES | NPX045S2A | NSM045S2A | NPX060S3A | NSM060S3A | NPX080S3A | NSM080S3A | NPX100S5A | NSM100S5A | NPX120S5A | NSM120S5A |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Motor | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC |
| Width | 17 1/2 | 17 1/2 | 17 1/2 | 17 1/2 | 17 1/2 | 17 1/2 | 22 1/2 | 22 1/2 | 22 1/2 | 22 1/2 |
| Depth | 29 1/2 | 29 1/2 | 29 1/2 | 29 1/2 | 29 1/2 | 29 1/2 | 29 1/2 | 29 1/2 | 29 1/2 | 29 1/2 |
| Height | 32 7/8 | 32 7/8 | 32 7/8 | 32 7/8 | 32 7/8 | 32 7/8 | 32 7/8 | 32 7/8 | 32 7/8 | 32 7/8 |
| Plenum Opening Depth | 19 5/8 | 19 5/8 | 19 5/8 | 19 5/8 | 19 5/8 | 19 5/8 | 19 5/8 | 19 5/8 | 19 5/8 | 19 5/8 |
| Plenum Opening Width | 16 1/4 | 16 1/4 | 16 1/4 | 16 1/4 | 16 1/4 | 16 1/4 | 21 1/4 | 21 1/4 | 21 1/4 | 21 1/4 |
| Return Opening Size | 14 x 22 | 14 x 22 | 14 x 22 | 14 x 22 | 14 x 22 | 14 x 22 | 14 x 22 | 14 x 22 | 14 x 22 | 14 x 22 |

CLEARANCES AND VENTING

| 9500 SERIES | NPX045S2A | NSM045S2A | NPX060S3A | NSM060S3A | NPX080S3A | NSM080S3A | NPX100S5A | NSM100S5A | NPX120S5A | NSM120S5A |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Motor | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC |
| Clearances to Combustibles | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Minimum Vent Size (in) | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | 2 | 2 | 2 | 2 | 3 | 3 |
| Maximum Vent Size (in) | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Minimum Vent Length (ft) | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| Maximum Vent Length (ft) | 75 | 75 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |

AIRFLOW AND COOLING

| 9500 SERIES | NPX045S2A | NSM045S2A | NPX060S3A | NSM060S3A | NPX080S3A | NSM080S3A | NPX100S5A | NSM100S5A | NPX120S5A | NSM120S5A |
|---------------------|-----------|-----------|--------------|--------------|--------------|-------------|------------|-----------|------------|-----------|
| Motor | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC | X13 ECM | PSC |
| Blower Size | 10-6TDD | 10-6TDD | 10-6TDD | 10-6TDD | 12-7TDD | 12-7TDD | 12-10TDD | 12-10TDD | 12-10TDD | 12-10TDD |
| Motor Type and Size | 1/3hp | 1/2hp | 1/2hp | 1/2hp | 1/2hp | 1/2hp | 3/4hp | 3/4hp | 3/4hp | 3/4hp |
| Maximum CFM AC | 950 | 1000 | 1125 | 1200 | 1125 | 1200 | 1875 | 2000 | 1875 | 2000 |
| Minimum CFM AC | 600 | 800 | 600 | 800 | 600 | 800 | 750 | 1200 | 750 | 1200 |
| AC Tonnages | 1½, 2, 2½ | 1½, 2, 2½ | 1½, 2, 2½, 3 | 1½, 2, 2½, 3 | 1½, 2, 2½, 3 | 2, 2 1/2, 3 | 2, 3, 4, 5 | 3, 4, 5 | 2, 3, 4, 5 | 3, 4, 5 |

All specifications and designs can change without notice to allow for on-going product improvement. Images may not be exactly as shown. Consult your owners manual for current information. Check all local and national building codes and gas regulations. Napoleon® is a registered trademark of Wolf Steel Ltd. © Wolf Steel Ltd.

Authorized Dealer