

## **EAST LINEAR**

#### **Features**

- Solid brass construction
- Quarter-turn washerless ceramic disc valve cartridge
- ADA compliant contemporary cold lever handle
- Spout assembly with integral supply hoses
- 6.23" (15.8 cm) spout height at outlet
- 4.00" (10.2 cm) spout reach (c-c)
- For single hole configurations
- ADA Compliant
- 1.5 GPM (5.7 LPM) Max

### **Codes / Standards Compliance**

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAMPO/cUPC
- NSF/ANSI 61, SECTION 9
- NSF/ANSI 372
- IPC
- ADA & ICC/ANSI A117.1
- Energy Policy Act of 1992
- California Energy Commission
- All applicable US Federal and State material regulations

#### **Colors / Finishes**

10B: Oil Rubbed Bronze15: Polished Nickel

15S: Satin Nickel - PVD26: Polished Chrome

20. Folished Chrome



### **Cold Water Dispenser Faucet**

106C







| Specified Model |                             |                               |
|-----------------|-----------------------------|-------------------------------|
| Model           | Description                 | Colors   Finishes             |
| 106C            | Cold Water Dispenser Faucet | □ 10B □ 15 □ 15S □ 26 □ Other |
| 6-027           | Integrated Air Gap Base     | N/A                           |

<sup>\*\*</sup> The use of an air gap is required for dispenser faucets drawing from a reverse osmosis filtration system. The Integrated Air Gap Base (6-027) affords the functionality of a separate air gap within the design of the product as depicted. Failure to specify the Integrated Air Gap Base (6-027) will result in a product constructed using the standard base (no internal air gap).


### Product Specification Add "Color / Finish" suffix to Model number, below.


The Cold Water Dispenser Faucet shall be made of solid brass construction. Faucet shall incorporate a spout assembly with integral supply hoses and feature a quarter-turn washerless ceramic disc valve cartridge. Faucet shall incorporate an ADA compliant contemporary cold lever handle design. Cold Water Dispenser Faucet shall have a 1.5 gallon (5.7 liters) per minute maximum flow rate and accommodate single hole configurations. Product shall incorporate a 6.23" (15.8 cm) spout height at outlet and a 4.00" (10.2 cm) spout reach (c-c). Cold Water Dispenser Faucet shall be Newport Brass Model 106C/\_\_\_\_\_. [Integrated Air Gap Base shall be Newport Brass Model 6-027/\_\_\_\_].

# 106C

## **PRODUCT DIMENSIONS** (Units are in inches)

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

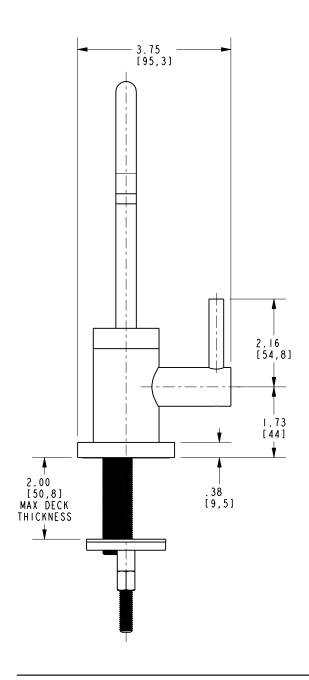

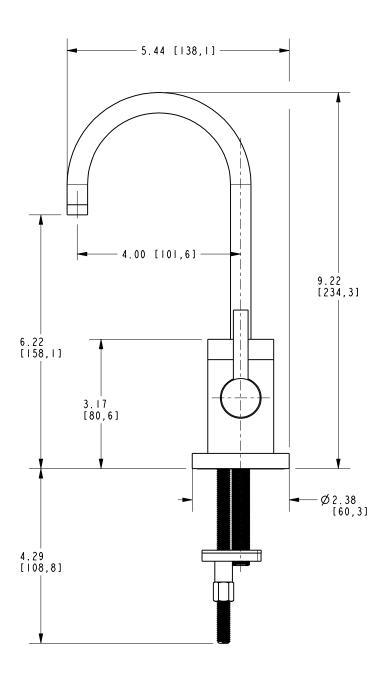

East Linear Hot Water Dispenser 106C

