



**TOP VIEW**

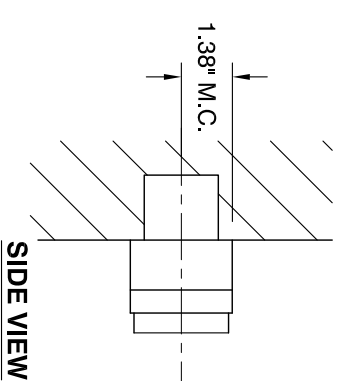

**SIDE VIEW**

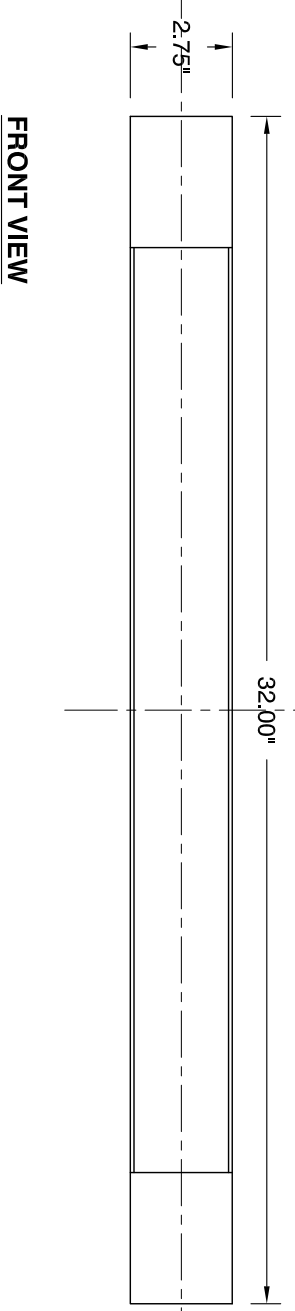

**FRONT VIEW**

**OXYGEN LIGHTING ©**

**LAMPING**

- (2x) 10.1W LED array
- 3000K, 350mA (ea.)
- Initial Lumens: 2920 lm
- Delivered Lumens: TBD
- CRI > 80
- Color Consistency: 3 Step Macadam Ellipse

**DRIVER (Dimmable)**

- (2x) 0-10v & Reverse Phase Dimming, Constant Current, 12w, 350mA

**INPUT VOLTAGE**

- 120v OR 277v 50/60Hz

**METAL FINISHES**

- 14 - Polished Chrome
- 22 - Oiled Bronze
- 24 - Satin Nickel
- 40 - Aged Brass

**DIFFUSER**

- Matte White Acrylic

**DIMENSIONS**

- 32.00" (w) x 2.75" (h) x 2.50" (ext.)

**INSTALLATION**

- 2" x 3" "J" - Box
- ETL Dry/Damp Listed
- ADA
- Conforms to UL STD 1598 Certified CAN/CSA STD C22.2 No. 250.0

**32" APOLLO** vanity  
**120V 3-525-22**  
**277V 37-525-22**

**Sample Catalog Number**



**Series #**    **Finish**    **Catalog number**  
 3-525    -    24    =    3-525-24

**PROJECT:** \_\_\_\_\_

**DATE:** \_\_\_\_\_

**Oxygen**

**OXYGEN LIGHTING**  
 201 RAILHEAD RD, FORT WORTH, TX 76106  
 TEL. (877) 607-0202 FAX (877) 607-0203  
 WWW.OXYGENLIGHTING.COM

