

Model #	Function
E8000/L	Lever Entry Function
E8000/LS	Lever Storeroom Function
E8000/LPA	Lever Passage Function
E8000/LD	Lever Entry Function w/ I/C Core
E8000/LSD	Lever Storeroom Function w/ I/C Core

Specifications	
Door Prep.	Cross Bore: 2-1/8", Edge: 1"
Door Thickness	Fits 1-3/8" to 1-3/4" door
Cylinders / I/C Core	6-pin "C" keyway standard 5-pin KW keyway available BEST 6-Pin I/C Core "A" keyway available
Handing	Non Handed
ANSI/BHMA	A156.2 Grade 2
Material	Zinc Die-Cast

Function	Description
Entry	Lever locked or unlocked by key
Storeroom	Lever always fixed and unlock by key only
Passage / Hall & Closet	Lever always free

Finish Availability:

AL: Aluminum (Painted)


DB: Dark Bronze (Painted)

PB: Polished Brass (Painted)


* I/C Core is not included with Lever Trim. I/C Core is sold separately.

E8000

Lever Outside Trims



Interchangeable Core Lever

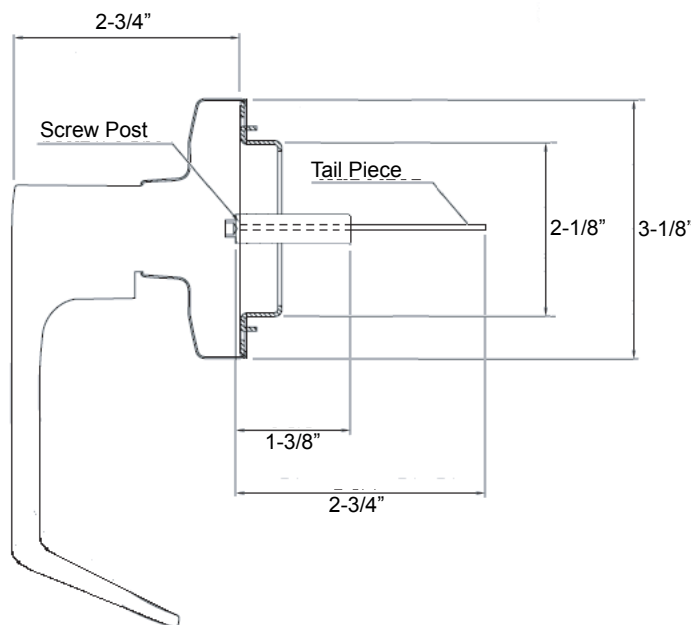

UL Listed