

Model #	Function
E8000/K	Lever Entry Function


Specifications	
Door Prep.	Cross Bore: 2-1/8", Edge: 1"
Door Thickness	Fits 1-3/8" to 1-3/4" door
Cylinders	6-pin "C" keyway standard 5-pin KW keyway available
Handing	Non Handed
ANSI/BHMA	A156.2 Grade 2
Material	Casted Solid Brass


Function	Description
Entry	Lever locked or unlocked by key

Finish Availability:

AL: Aluminum (Painted)
DB: Dark Bronze (Painted)
PB: Polished Brass (Painted)





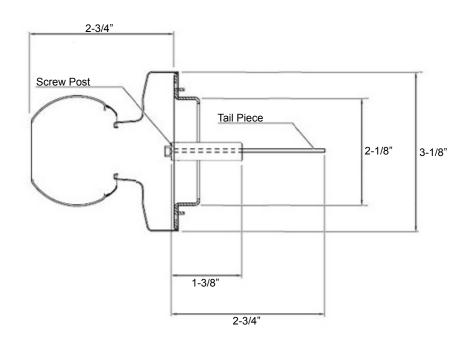

UL Listed

