


| Specifications | |
|------------------|---|
| Door Height | For door up to 7'0" high -- 7'0" standard |
| Door Width | For door 2'6" to 3'0" wide -- 3'0" standard |
| Stile | 4-1/4" min. |
| Mounting Height | 40-5/16" from CL to finished floor recommended |
| Mounting | Furnished standard with sheet metal & machine screws and SNB |
| Cylinders | 6-pin standard |
| UL Listed | ANSI Grade 1 |
| Operation | Exit by slight pressure on any point on the push bar at all time |
| Material | Push bar of extruded anodized aluminum, spring of stainless steel |
| Latch Bolts | 3/4" throw, stainless steel |
| Dead Latch Bolts | 5/8" stainless steel |
| Finish | Push bar-anodized, cover-painted |
| Strike | For 5/8" stop, plus shim for 1/2" stop |
| Protection | 2-1/2" maximum, 1-7/8" depressed |
| Reversible | Non-handed. Reversible for all functions and trims |
| Door Thickness | 1-3/4" thick standard. Specify if other than 1-3/4" trims |
| Backset | 2-3/4" |
| Top Latchbolt | 3/4" throw, stainless steel |
| Top Deadbolt | 1/2" throw, steel bolt |
| Bottom Latchbolt | 3/4" throw, stainless steel |

EF8000

Series

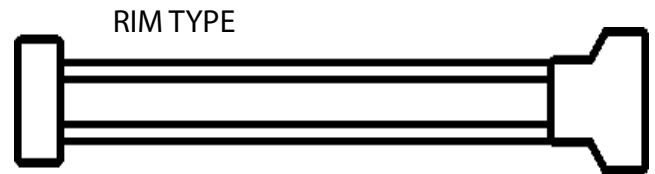


Finish Availability:

AL: Aluminum (Painted)

DB: Dark Bronze (Painted)

PB: Polished Brass (Painted)

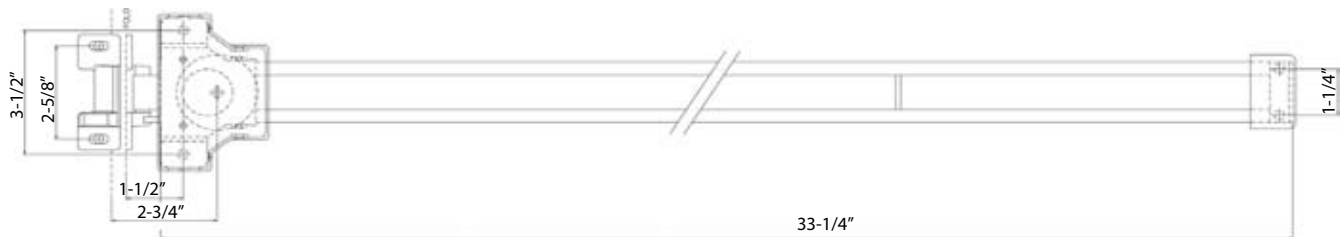

UL Listed