

# PEERLESS

## Mounting without escutcheon plate

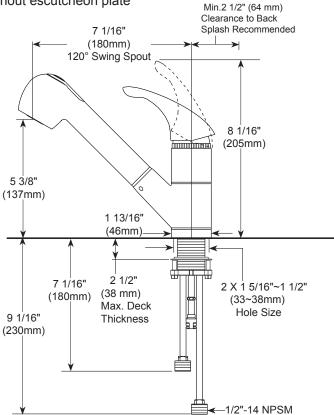


# Mounting with escutcheon plate

Min.2 1/2" (64 mm) Clearance to Back Splash Recommended

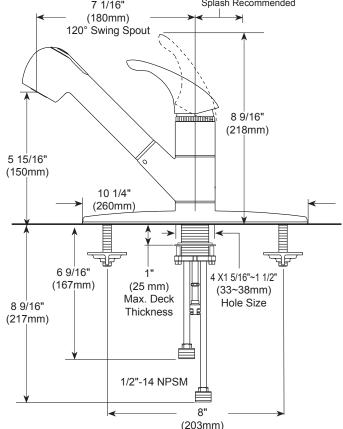

▲ Designate proper finish suffix PSP-K-P18550LF Rev. E

### P18550LF▲



#### KITCHEN FAUCETS

- Single handle pull-out
- 1, 2 or 3 Hole Sink Applications

#### **STANDARD SPECIFICATIONS:**

- Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Single handle kitchen faucet for exposed mountings on 1 and 3 hole sinks with 8" centers
- Standard 7 1/16" (180mm) long spout swings 120
- Replaceable rotating ball valve with replacerble non-metallic seats
- 1/2″- 14 NPSM threaded male inlet adapters

#### WARRANTY

 Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.

#### **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1