Pfister

Specifications

Features

• 1.8 GPM Flow Rate

Mounting Option

• 70" Pullout Hose Length

• 1. 2. 3. or 4-Hole Installation:

Deck Plate or Single Hole

Braided Nylon Reinforced

Ashfield™ Pull-Down Kitchen Faucet

LF-529-MYPS Finish(S)




€) ▼

- 1, 2, 3 or 4-Hole Installation
- Pforever Seal
- Soap/ Lotion Dispenser Included

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)

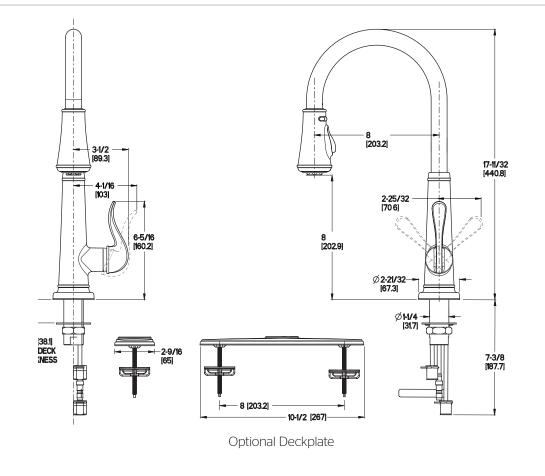

Includes Metal Supply Nuts

High-Arc Decorative Spout

Adjustable Spray Volume

• Ergonomic Spray Head

Pforever Seal Ceramic

Produces Strong Spray or


• Accommodates Up to 2"

Deck Thickness

Control Feature

Aerated Stream

Disc Valve • Pforever Warranty®



Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

- Vinyl Hose • Reinforced Deck Plate with Integrated Tie-Downs
- 360° Swivel Spout for Custom Handle Positioning

Dimensions

11305-16