

One-Light Wall Sconce W/HAL AC LED Module

Wall mounted • Wet location listed



Description:

Modern geometric outdoor LED sconces are designed to complement a range of residential and commercial architectural styles. ADA compliant. 9w LED is 3000K, 90+ CRI in an Antique Bronze cast aluminum square shade. Dark Sky compliant.

Specifications:

- Antique Bronze (-20) (painted)
- Cast aluminum Construction
- Antique Bronze cast aluminum shade, White acrylic Diffuser
- LED Module is replaceable (part # 93054049)
- Modern geometric outdoor LED sconces.
- Designed to complement a range of residential and commercial architectural styles.
- Dark Sky compliant.
- 623 lumens 69.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified
- Meets California Title 24 high efficacy requirements for outdoor use only

Performance:

Number of Modules	1
Input Power	9w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	623/69.2 (LM-82)
Lumens/LPW (Delivered)	352/49.6 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Wet location listed
	ENERGY STAR® qualified
	Meets California Title 24 high efficacy requirements for outdoor use only

P5635-2030K9

Images:



Dimensions:

Width: 6-1/8"
 Depth: 4"
 Height: 5"
 H/CTR: 2-3/8"

Glass
 Width: 4-1/16"
 Length: 6-1/16"
 Height: 4-15/16"
 Glass 2
 Width: 2-7/8"
 Length: 2-7/8"
 Height: 0-11/16"

Photometrics:

P5635-2030K9

ELECTRICAL DATA	P5635-2030K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.075 A
Input Power	9
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P5635-2030K9


LED Light Engine: 3000 K 90+
 System Wattage: 9
 Fixture delivered lumens: 352
 Fixture Efficacy: 49.6
 Spacing Criteria: 1.3

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	133	
5	133	13
15	128	36
25	120	55
35	108	68
45	91	70
55	68	60
65	38	38
75	11	12
85	0	1
90	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	104	29.6
0-40	172	48.8
0-60	302	85.8
0-90	352	100.0
90-180	0	0.0
0-180	352	100.0

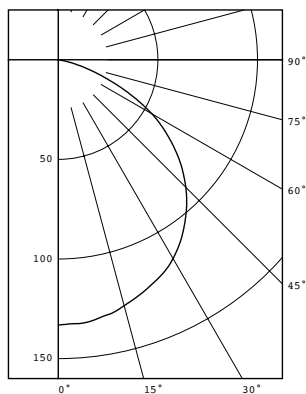

P5635-2030K9

Dimming Notes:

P5635 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Vieri VTELV-600

Lutron Ariadni AYCL-153P

Lutron Diva DVCL-153P

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.