


## Compact Fluorescent

# Non-Metallic Energy Star

## Outdoor

Finish				Dimensions (Inches)			
Catalog No.	White	Black	Lamping	Α	В	c	D
P5748	-30EB	-31EB	1-4 pin 18w Ouad CFL	8	19-7	/8 8-1/4	10

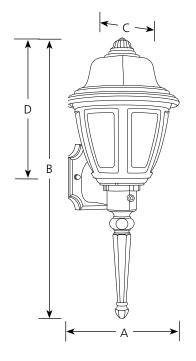

### **Specifications:**

#### General

- Curved white acrylic panels
- Captive top of unit hinges for lamp replacement
- Polypropylene construction
- White (-30) or black (-31) material
- Energy Star certified

#### **Mounting**

- Wall mount outdoor
- Covers a standard 4" recessed octagonal recessed outlet box
- Mounting strap included

#### Electrical

- Unit has a 4 pin GX24q-2 socket.
- 120v NPF electronic ballast

- Unit will start down to 0 degrees F
- Integral photocell turns unit off during daytime
- Pre-wired

## **Labeling**

• UL-CUL wet Location listed