

Type _____


-30

P7014

P7015

P7016

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	White		A	B	C
P7014	-30	2-F8T5	5	24-1/2	1-1/8
P7015	-30	1-F8T5 & 1-F13T5	5	33-1/2	1-1/8
P7016	-30	2-F13T5	5	42-3/8	1-1/8

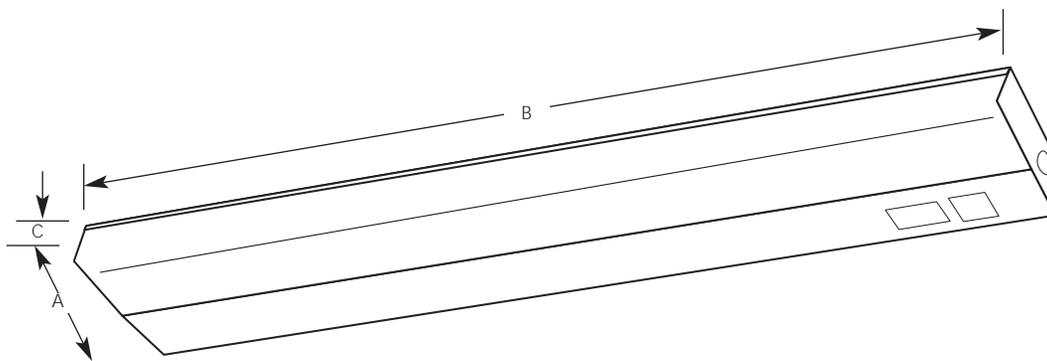

Specifications:

General

- Trim, energy efficient fluorescent
- White baked enamel housing
- White acrylic diffuser
- Diffuser snaps securely without the use of tools
- Steel chassis and ballast cover

Electrical

- Standard 120v NPF ballast
- KO for rocker switch (P8603-01 accessory)
- KO for G.C.O. (P8608-30 accessory)

Labeling

- UL-CUL damp location listed

Mounting

- Flush mounted under cabinets and shelves, over a desk, in a kitchen or work area
- 1/2" KO's in ends for continuous row mounting or end electrical feed
- 1/2" KO in back for electrical feed
- Keyhole slots on top for ease of mounting