

# 54" Patio AirPro


## **Ceiling Fan**

Type		
	-20	

P2533 □

_			-
_ E	i .	٠i,	·h
г	и	ш	ы

	-	Dimensions (Inches)	
Catalog No	Antique Bronze	<u>A</u>	<u>B</u>
P2533	-20	54	18-1/4
Blades			
Side 1	Toasted Oak		
Side 2	Toasted Oak		

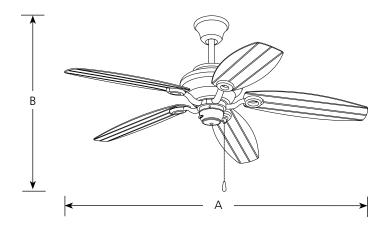

### **Specifications:**

#### General

- 15 year limited warranty
- Energy Star Certified

#### <u>Blades</u>

- Five blades
- Reversible
- 12 degree pitch
- Sure Connect blade attachment system
  - Screws preinstalled in blades for attachment to motor arms
  - ° Special guides align blades to motor arms
  - Preinstalled rubber isolation pads minimize vibration noise
- ABS all-weather blade construction Motor
  - Triple capacitor speed control; manual reverse control
  - 153mm dia x 18mm high
  - Pull chain is antique brass with walnut fob ounting
  - Dual ceiling mounting on downrod, or close to ceiling
  - Quick Install canopy
  - Installs without removing J-box screws
  - Holds fan for wiring during installation

- Dual-mount for downrod or close to ceiling mounting
- A 1"x 6" downrod is included. Longer accessory downrods can be ordered separately
- Standard canopy designed for sloped ceilings up to 45 degrees (12:12 ceiling pitch) using downrod supplied or accessory downrods
- Oversized, textured die cast hanger ball reduces noise and wobble vibrations
- Canopy covers standard recessed 4" octagonal outlet box. Note: An outlet box assembly designed for fan installation is required (not included)
- Mounting hardware is included Electrical
  - 80" lead wires included
  - Light fixture adaptable
  - Pre-wired

## High Speed Energy Information

- Airflow 5,947 cfm
- Energy consumption 68.3 watts
- Airflow efficiency 87 cfm/watt beling

#### <u>Labeling</u>

- UL/CUL wet location listed
- Energy Star Certified



Progress Lighting 701 Millennium Blvd. Greenville, South Carolina 29607