



Compact Fluorescent

Crawford
Energy Star

Outdoor

Type _____



-31EB -33EB

P5685

P5686

Catalog No.	Finish		Lamping	Dimensions (Inches)			
	Black	Cobble-stone		A	B	C	D
P5685	-31EB	-33EB	1 13w CF*	6-1/2	12-1/2	8-3/4	8
P5686	-31EB	-33EB	1 26w CF*	8-1/2	16-3/4	11	9-5/8

* Spiral or triple tube

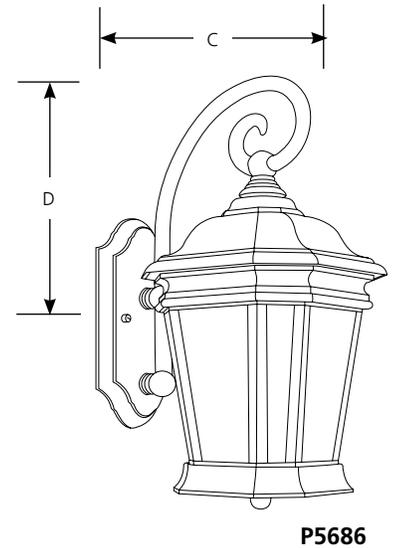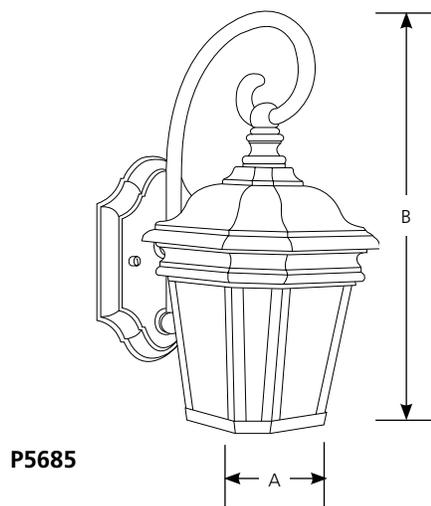

Specifications:

General

- Die cast aluminum exterior construction
- Solid brass interior components
- Painted black (-31) or cobblestone (-33) finishes
- Etched white glass panels
- Heavy support arm
- Energy Star certified

Mounting

- Wall mounted outdoor.
- Covers standard recessed octagonal outlet box
- Mounting strap for outlet box included

Electrical

- P5685 has GX24q-1, and P5686 has GX24q-3 based sockets
- 120v NPF electronic ballast
- Integral photocell turns unit off during daytime
- Unit will start down to 0 degrees F
- Pre-wired

Labeling

- UL-CUL wet location listed



Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 3/10