
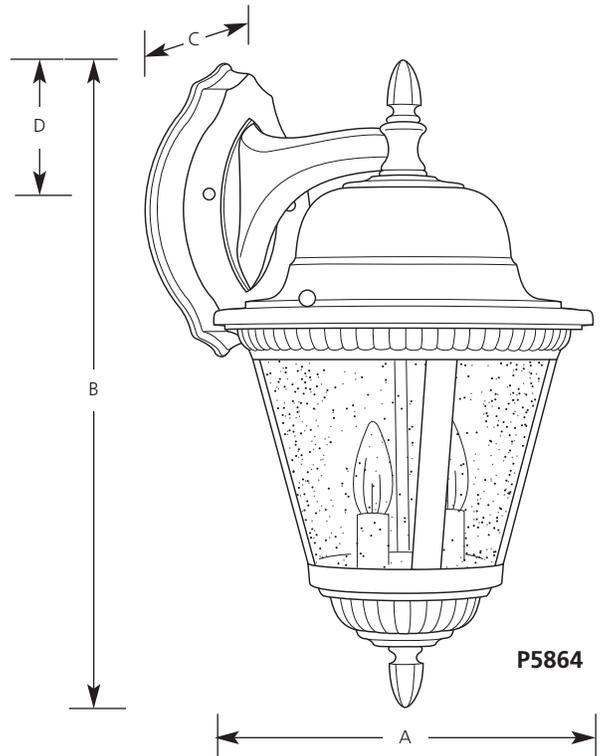


Type	_____	
	-30	-31
P5862	<input type="checkbox"/>	<input type="checkbox"/>
P5863	<input type="checkbox"/>	<input type="checkbox"/>
P5864	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish		Lamping	Dimensions (Inches)			
	White	Black		A	B	C	D
P5862	-30	-31	1 (m) 60w	6-7/8	12-3/4	8-3/8	3-1/4
P5863	-30	-31	1 (m) 100w	9	16	10-3/8	3-5/8
P5864	-30	-31	2 (c) 60w	11	19-1/4	12-7/8	4-5/8

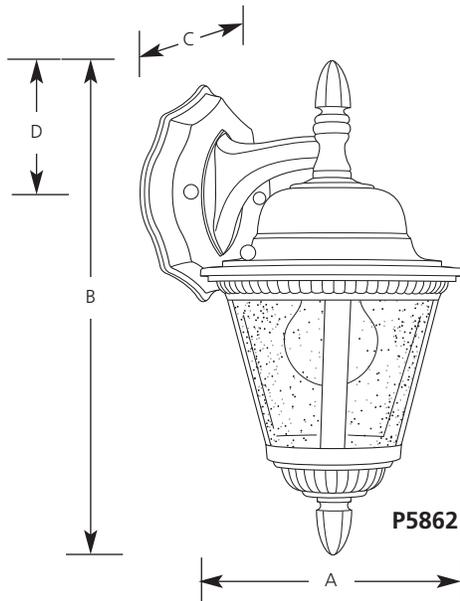

**Specifications:**

General

- Clear seeded glass.
- Beaded details with ribbed finials
- Die cast aluminum construction
- Painted finishes
- Companion post top, and chain mounted units

Mounting

- Wall mount
- Wall bracket covers a standard recessed 4" hexagonal outlet box
- Mounting strap included



Electrical

- P5862 and P5863 have ceramic medium based sockets
- P5864 has phenolic candelabra based sockets
- Pre-wired

Labeling

- UL-CUL wet location listed

Catalog No.	Finish	Lamping	Dimensions (Inches)			
	Antique Bronze		A	B	C	D
P5862	-20STR	1-13w CFL	6-7/8	12-3/4	8-3/8	3-1/4
P5863	-20STR	1-13w CFL	9	16	10-3/8	3-5/8
P5864	-20STR	1-18w CFL	11	19-1/4	12-7/8	4-5/8

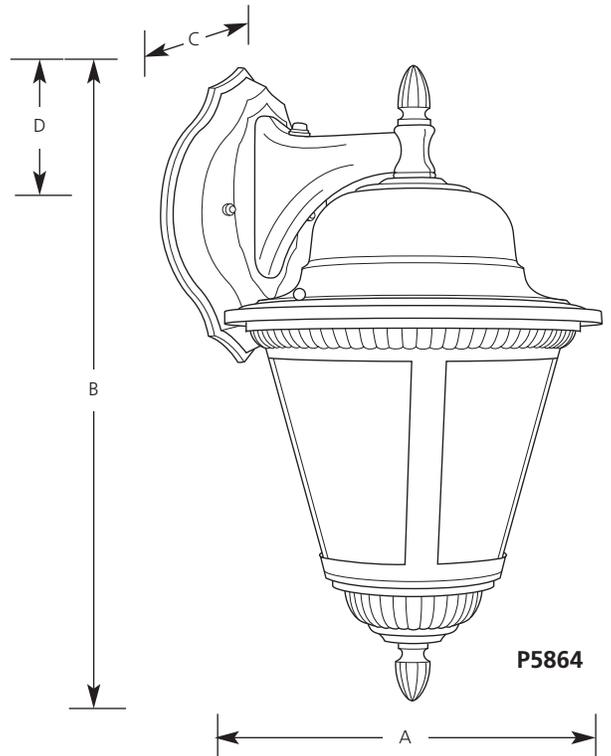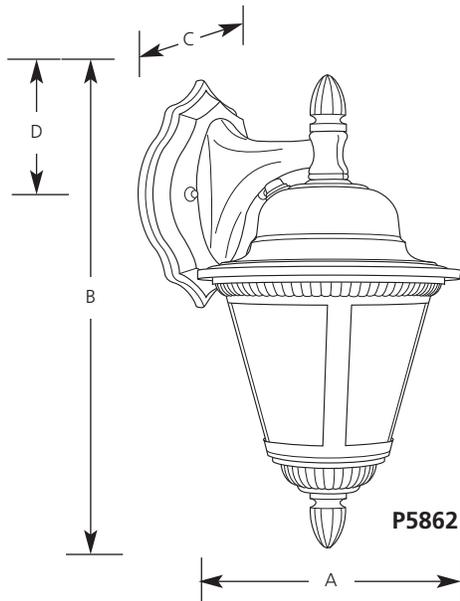

**Specifications:**

General

- Seeded frosted glass.  
P5862 - 5" dia. x 4-1/4" ht.  
P5863 - 7" dia. x 5-3/4" ht.  
P5864 - 8-1/2" dia. x 7" ht.
- Beaded details with ribbed finials
- Die cast aluminum construction
- Painted or acid antique bronze finish
- Energy Star certified
- Companion post top, chain mounted and flush units

- Mounting strap included
- Canopy:  
P5862-STR - 4-5/8" x 6-1/8" x 1"  
P5863-STR - 5-1/4" x 6-3/4" x 1"  
P5864-STR - 6-1/2" x 9-1/8" x 1"

Electrical

- GU24 based socket
- Integral photocell turns unit off during daytime
- Pre-wired

Labeling

- US wet location listed



Progress Lighting  
701 Millennium Blvd.  
Greenville, South Carolina  
29607

www.progresslighting.com

Mounting

- Wall mount
- Wall bracket covers a standard recessed 4" octagonal outlet box