




Incandescent

**6" Drop Opal with Reflector  
IC & Non-IC**

**Recessed**

Type \_\_\_\_\_  
-60  
P8009

Catalog No.	Finish	Dimensions (Inches)	
		A	B
P8009	White Glass, Non-Metallic Flange -60	7-3/4	5-1/8

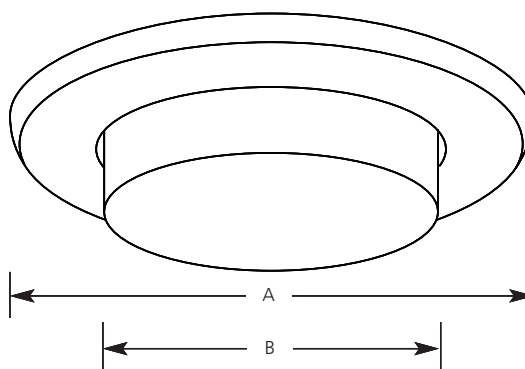

**Lamp Wattage**

Housing	IC	Non-IC
P87-AT	40A19, 50w PAR30	75A19, 75w PAR30
P87-ATQC	40A19, 50w PAR30	75A19, 75w PAR30
P187-TG	40A19, 50w PAR30	75A19, 75w PAR30
P821-AT	60A19, 75w PAR30	60A19, 75w PAR30
P821-FB & P821-FBFC	N/A	60A19, 50w PAR30

**Specifications:**

Flange

- Bright White plastic flange
- No light leaks around trim flange
- Covers irregular ceiling openings

Lens

- Drop opal glass: 5-7/16" OD neck, 4-21/32" ID neck, 4-27/32" small dia., 5-1/8" large dia. x 1-3/8" ht.

Trim

- Trim-Lok® action forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position
- Full aluminum interior reflector

Labels

- UL-CUL wet location listed

Progress Lighting  
701 Millennium Blvd.  
Greenville, South Carolina  
29607

www.progresslighting.com  
Patent# 5,758,961

Rev. 7/09



# P87-AT

## P87-AT WITH P8009-60

Report No. 98184

No. Lamps: 1 Type Lamp: 50PAR30L/FL-GE Total Lumens: 610

Fixture Efficiency: 82.4%



S/MH Ratio: 0.8

### Single Fixture Data


Ceiling Ht.(Ft.)	10% Values		Zero Degrees	50% Values	
	Beam Angle - 93°			Beam Angle - 44°	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	1.0	11	10.4	5.2	4
10	0.6	16	5.6	2.8	6
12	0.4	20	3.5	1.8	8
14	0.2	24	2.4	1.2	9
16	0.2	28	1.7	0.9	11

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

### Quick Calculator Charts

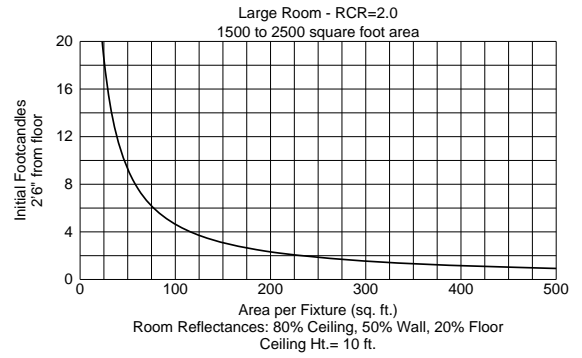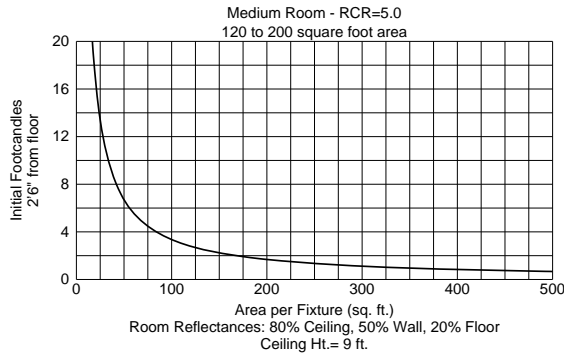

#### DISTRIBUTION CURVE

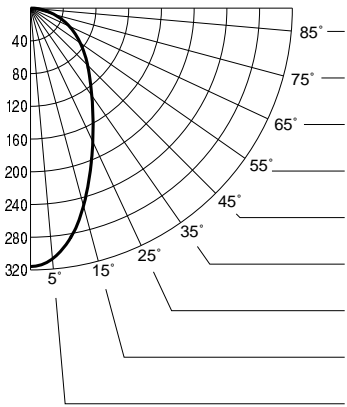

#### INTENSITY DATA

DEGREES	CANDELA
90	0
85	11
80	20
75	30
70	41
65	52
60	63
55	74
50	86
45	99
40	113
35	131
30	153
25	180
20	213
15	250
10	284
5	307
0	316

#### ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20

RC	Effective Floor Cavity Reflectance 0.20																						
	80				70				50				30				10				0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
0	98	98	98	98	96	96	96	96	92	92	92	88	88	88	84	84	84	83					
1	90	86	83	80	88	84	81	79	81	78	76	78	76	74	75	73	72	70					
2	83	76	71	66	80	75	70	65	72	68	64	69	66	62	66	64	61	59					
3	76	68	61	56	74	66	60	56	64	59	55	62	57	54	60	56	53	51					
4	70	61	54	49	68	60	53	48	58	52	48	56	51	47	54	50	46	45					
5	65	55	48	43	63	54	47	42	52	46	42	51	46	42	49	45	41	39					
6	60	50	43	38	59	49	43	38	48	42	38	46	41	37	45	41	37	35					
7	56	46	39	34	55	45	39	34	44	38	34	43	38	34	42	37	33	32					
8	53	42	36	31	52	42	35	31	41	35	31	40	34	31	39	34	30	29					
9	50	39	33	28	49	39	33	28	38	32	28	37	32	28	36	31	28	27					
10	47	37	30	26	46	36	30	26	35	30	26	35	30	26	34	29	26	24					

# P87-AT

## P87-AT WITH 8009-60

Report No. 98185

No. Lamps: 1 Type Lamp: 50PAR30S/FL-SYLVANIA Total Lumens: 600

Fixture Efficiency: 74.3%



S/MH Ratio: 0.8

### Single Fixture Data


Ceiling Ht.(Ft.)	10% Values		Zero Degrees Ft.-C	50% Values	
	Beam Angle - 95°			Beam Angle - 45°	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.8	12	8.4	4.2	5
10	0.5	16	4.5	2.3	6
12	0.3	21	2.8	1.4	8
14	0.2	25	1.9	1.0	10
16	0.1	29	1.4	0.7	11

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

### Quick Calculator Charts

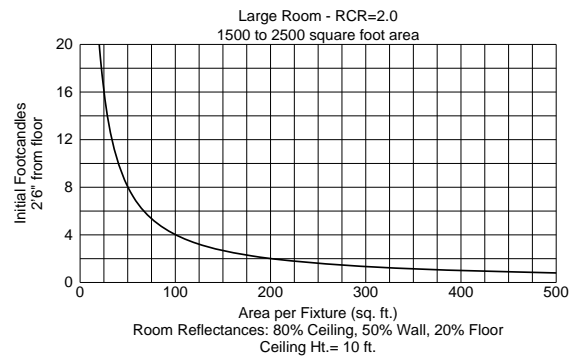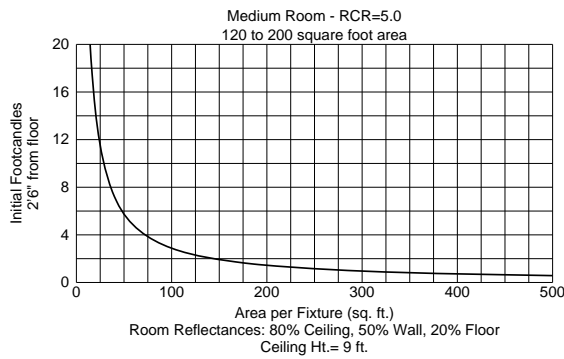

#### DISTRIBUTION CURVE

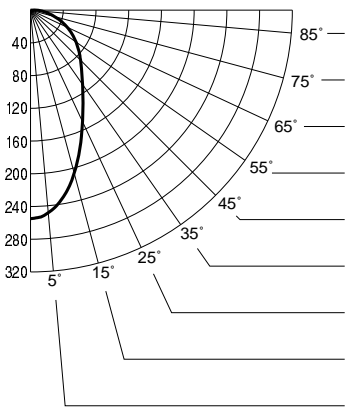

#### INTENSITY DATA

DEGREES	CANDELA
90	0
85	15
80	22
75	31
70	40
65	50
60	59
55	68
50	77
45	86
40	97
35	111
30	128
25	151
20	178
15	206
10	232
5	249
0	255

#### ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30				10				0				
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30
0	88	88	88	88	86	86	86	86	83	83	83	79	79	79	76	76	76	74							
1	81	77	74	71	79	75	72	70	72	70	67	69	67	65	66	65	63	62							
2	74	67	62	58	72	66	61	57	63	59	56	61	58	55	59	56	54	52							
3	67	60	54	49	66	59	53	48	56	52	48	54	50	47	52	49	46	44							
4	62	53	47	42	60	52	46	42	51	45	41	49	44	41	47	43	40	39							
5	57	48	42	37	56	47	41	37	46	40	36	44	40	36	43	39	35	34							
6	53	44	37	33	52	43	37	33	42	36	32	40	36	32	39	35	32	30							
7	50	40	34	29	48	39	33	29	38	33	29	37	32	29	36	32	29	27							
8	47	37	31	27	45	36	31	26	35	30	26	34	30	26	34	29	26	25							
9	44	34	28	24	43	34	28	24	33	28	24	32	27	24	31	27	24	22							
10	41	32	26	22	40	31	26	22	31	26	22	30	25	22	29	25	22	21							

# P87-AT

## P87-AT WITH P8009-60

Report No. 98187

No. Lamps: 1 Type Lamp: 60A19-GE Total Lumens: 865

Fixture Efficiency: 50.0%



S/MH Ratio: 1.3

### Single Fixture Data


Ceiling Ht.(Ft.)	10% Values		Zero Degrees Ft.-C	50% Values	
	Beam Angle - 114°			Beam Angle - 67°	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.4	17	3.8	1.9	7
10	0.2	23	2.1	1.0	10
12	0.1	29	1.3	0.6	13
14	0.1	36	0.9	0.4	15
16	0.1	42	0.6	0.3	18

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

### Quick Calculator Charts

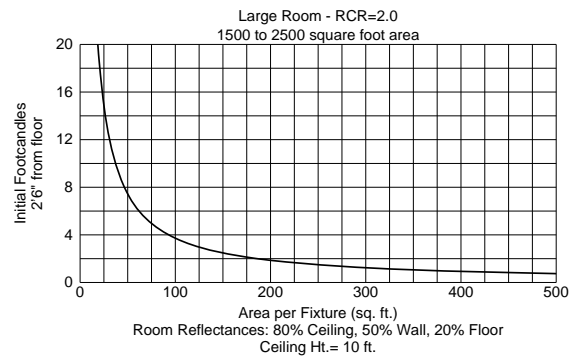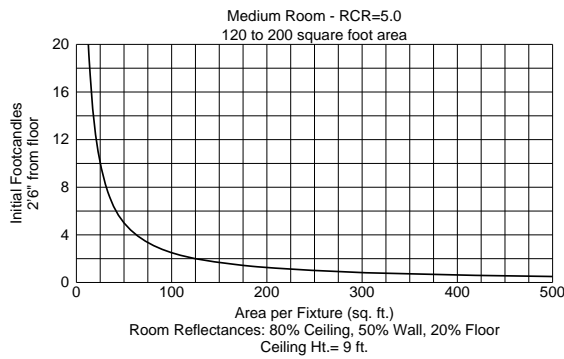

#### DISTRIBUTION CURVE

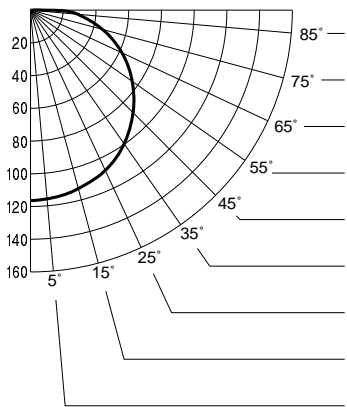

#### INTENSITY DATA

DEGREES	CANDELA
90	0
85	29
80	37
75	46
70	54
65	62
60	69
55	76
50	82
45	89
40	94
35	100
30	104
25	108
20	111
15	113
10	115
5	116
0	116

#### ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30				10				0			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	60	60	60	60	58	58	58	58	56	56	56	53	53	53	51	51	51	51	51	51	51	51	51	50
1	53	50	47	45	51	49	46	44	46	44	42	44	43	41	43	41	40	43	41	40	39	39	39	39
2	47	43	38	35	46	42	38	35	40	37	34	38	35	33	36	34	32	36	34	32	31	31	31	31
3	43	37	32	28	42	36	32	28	34	31	28	33	30	27	32	29	27	32	29	27	25	25	25	25
4	39	32	27	24	38	32	27	23	30	26	23	29	26	23	28	25	22	28	25	22	21	21	21	21
5	36	29	24	20	35	28	23	20	27	23	20	26	22	19	25	22	19	25	22	19	18	18	18	18
6	33	26	21	17	32	25	21	17	24	20	17	23	20	17	23	19	17	23	19	17	16	16	16	16
7	30	23	18	15	30	23	18	15	22	18	15	21	18	15	21	17	15	21	17	15	14	14	14	14
8	28	21	17	13	27	21	16	13	20	16	13	19	16	13	19	16	13	19	16	13	12	12	12	12
9	26	19	15	12	26	19	15	12	18	15	12	18	14	12	17	14	12	17	14	12	11	11	11	11
10	25	18	14	11	24	18	14	11	17	13	11	17	13	11	16	13	11	16	13	11	10	10	10	10

# P87-AT

## P87-AT WITH P8009-60

Report No. 98190

No. Lamps: 1 Type Lamp: 75A19 Total Lumens: 1190

Fixture Efficiency: 49.7%



S/MH Ratio: 1.3

### Single Fixture Data


Ceiling Ht.(Ft.)	10% Values		Zero Degrees	50% Values	
	Beam Angle - 114°			Beam Angle - 67°	
	Ft.-C	Beam Dia.	Ft.-C	Ft.-C	Beam Dia.
8	0.5	17	5.3	2.7	7
10	0.3	23	2.9	1.4	10
12	0.2	29	1.8	0.9	13
14	0.1	35	1.2	0.6	15
16	0.1	42	0.9	0.4	18

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

### Quick Calculator Charts

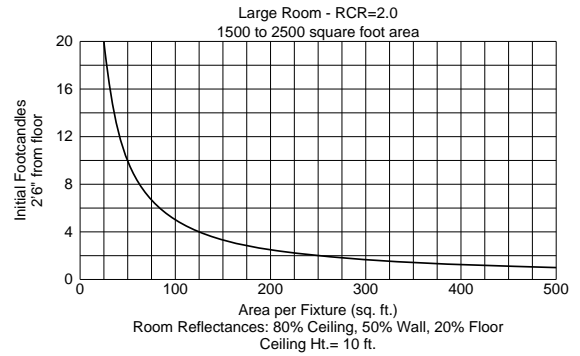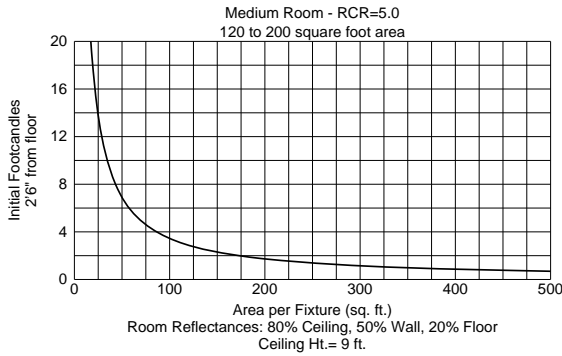

### DISTRIBUTION CURVE

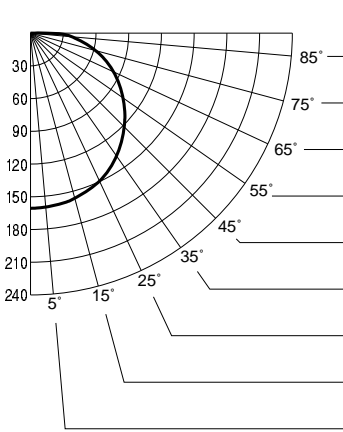

### INTENSITY DATA

DEGREES	CANDELA
90	0
85	38
80	50
75	62
70	73
65	84
60	94
55	104
50	113
45	121
40	130
35	138
30	144
25	150
20	154
15	157
10	159
5	160
0	161

### ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30				10				0									
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	59	59	59	59	58	58	58	58	55	55	55	53	53	53	51	51	51	51	51	51	51	51	51	51	51	51	51	51	51	50
1	53	50	47	44	51	48	46	44	46	44	42	44	42	41	42	41	40	39	42	41	40	39	42	41	40	39	38	37	36	35
2	47	42	38	35	46	41	38	34	39	36	34	38	35	33	36	34	32	31	36	34	32	31	36	34	32	31	30	29	28	27
3	43	37	32	28	41	36	32	28	34	31	28	33	30	27	32	29	27	25	32	29	27	25	32	29	27	25	24	23	22	21
4	39	32	27	24	38	31	27	23	30	26	23	29	26	23	28	25	22	21	28	25	22	21	28	25	22	21	20	19	18	17
5	36	29	24	20	34	28	23	20	27	23	20	26	22	19	25	22	19	18	25	22	19	18	25	22	19	18	17	16	15	14
6	33	26	21	17	32	25	21	17	24	20	17	23	20	17	22	19	17	16	22	19	17	16	22	19	17	16	15	14	13	12
7	30	23	18	15	29	23	18	15	22	18	15	21	18	15	20	17	15	14	20	17	15	14	20	17	15	14	13	12	11	10
8	28	21	17	13	27	21	16	13	20	16	13	19	16	13	19	16	13	12	19	16	13	12	19	16	13	12	11	10	9	8
9	26	19	15	12	26	19	15	12	18	15	12	18	14	12	17	14	12	11	17	14	12	11	17	14	12	11	10	9	8	7
10	25	18	14	11	24	17	13	11	17	13	11	16	13	11	16	13	11	10	16	13	11	10	16	13	11	10	9	8	7	6






Compact Fluorescent

**6" Drop Opal Shower Light  
with Reflector  
IC & Non-IC**

**Recessed**

Type \_\_\_\_\_  
-60  
P8009

Catalog No.	Finish	Dimensions (Inches)	
		A	B
P8009	White Glass, Non-Metallic Flange -60	7-3/4	5-1/8

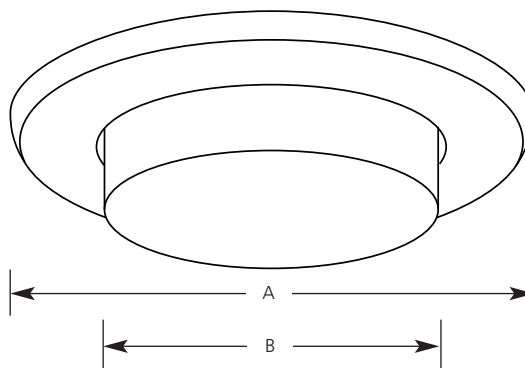

Lamp Wattage Housing	IC	Non-IC
P62-FB	NA	26 or 32w 4-pin Triple-tube CF
P83-AT	13w 4-pin Triple-tube CF	13w 4-pin Triple-tube CF
P83-ICAT	13w 4-pin Quad/Triple-tube CF	13w 4-pin Quad/Triple-tube CF
P83-26ICAT	26w 4-pin Triple-tube CF	26w 4-pin Triple-tube CF
P88-ICAT	18w 4-pin Quad/Triple-tube CF	18w 4-pin Quad/Triple-tube CF
P183-EB	13w 4-pin Triple-tube CF	13w 4-pin Triple-tube CF

**Specifications:**

Flange

- White plastic flange
- No light leaks around trim flange
- Covers irregular ceiling openings

Trim

- Trim-Lok action forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position
- Full aluminum interior reflector

Lens

- Drop opal glass: 5-7/16" OD neck, 4-21/32" ID neck, 4-27/32" small dia., 5-1/8" large dia. x 1-3/8" ht.

Lamps

- Maximum overall length of lamp cannot exceed 4.8" (4-11/16")
- Available is Progress 7808-01 (26w)

Labels

- UL-CUL wet location listed

Progress Lighting  
701 Millennium Blvd.  
Greenville, South Carolina  
29607

www.progresslighting.com  
Patent# 5,758,961

Rev. 7/09