
Incandescent

ROG

5" Eyeball Trim IC & Non IC

Recessed

| Туре | | | | |
|-------|-----|-----|-----|--|
| | -20 | -28 | -36 | |
| P8176 | | | | |

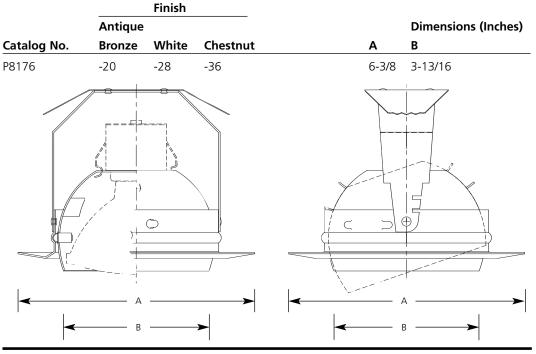

| Lam | p W | atta | ge |
|-----|-----|------|----|
| | | | |

| Housing | IC | Non-IC |
|---------|-----------|-----------|
| P85-AT | 75PAR30SN | 75PAR30SN |
| P85-TG | N/A | 75PAR30SN |
| P84-AT | 75PAR30SN | 75PAR30SN |
| P184-TG | 75PAR30SN | 75PAR30SN |
| P85-FB | N/A | 75PAR30SN |
| P185-TG | N/A | 75PAR30SN |

Specifications:

<u>Flange</u>

- White powder coated flange on white (-28)
- Antique bronze (-20), and chestnut (-36) have unpainted flanges that match the baffle finish
- Covers irregular ceiling openings
- No light leaks around trim flange

<u>Trim</u>

- Designed for 75w PAR30SN lamps
- Positive upward spring action forces trim to fit snugly against ceiling
- Socket mounts directly to top of ball for consistent lamp position
- Ball tilts 30 degrees and rotates 358 degrees

<u>Trim (con't.)</u>

- Built-in retention spring
- Steel construction
- Eyeball finish matches trim finish

<u>Options</u>

- White (-28) and chestnut (-36) are painted finishes
- Antique bronze (-20) is a plated finish

<u>Labels</u>

• UL-CUL damp location listed

Photometrics

• Refer to PAR30 Bare Lamp Application Data

Progress Lighting Post Office Box 5704 Spartanburg, South Carolina 29304-5704