



Incandescent

6" Regressed Mini Eyeball
IC & Non-IC


Recessed

Type _____

-329

P6678

Catalog No.	Finish White	Dimensions (Inches)	
		A	B
P6678	-29	7-3/4	4

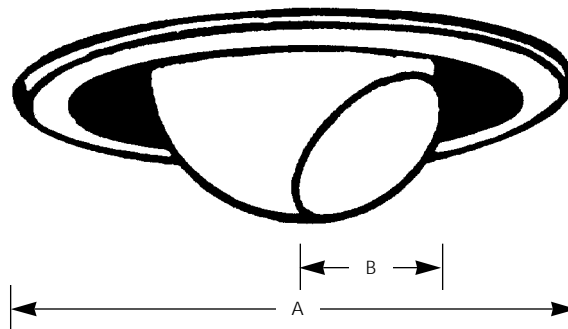

Lamp Wattage

Housing	IC	Non-IC
P86TG	50PAR20/R20	50PAR20/R20
P186TG	50PAR20/R20	50PAR20/R20

Specifications:

Flange

- Bright white powder painted steel flange and ball
- No light leaks around trim flange
- Covers irregular ceiling openings

Ball assembly

- Steel construction
- Eyeball is regressed into trim flange
- Designed for 50w PAR20 and R20 lamps
- Torsion springs mounted to the trim assembly
- Torsion springs lock to housing forcing the trim to fit snugly to the ceiling
- Socket mounts directly to top of ball for consistent lamp positioning

- Ball tilts 30 degrees and rotates 358 degrees

Options

- None

Labels

- UL-CUL damp location listed

Photometrics

- Refer to R20 & PAR20 Lamp Application Data

Progress Lighting
Post Office Box 5704
Spartanburg, South Carolina
29304-5704

www.progresslighting.com

Rev. 12/99

Progress Lighting
 Post Office Box 5704
 Spartanburg, South Carolina
 29304-5704

www.progresslighting.com

Figure 1
Single fixture





Figure 2
Multiple fixture



R20 Flood Lamps



Walls and Vertical Objects															
H	F.C.	L	W	S	H	F.C.	L	W	S	H	F.C.	L	W	S	
D = 2 FT					D = 3 FT					D = 4 FT					
30R20FL	4	7	7.6	2.4	2.2	5	5	7.6	3.1	2.8	7	2	11.1	4.3	3.9
CBCP - 300	5	4	14.1	2.9	2.6	6	3	11.4	3.6	3.3	8	2	15.1	4.8	4.4
Beam - 30 deg.	6	2	30.6	3.4	3.1	7	2	17.0	4.1	3.7	9	1	20.3	5.3	4.8
50R20FL	4	12	26.9	3.7	3.1	5	8	17.9	4.8	4.0	7	4	28.1	6.7	5.5
CBCP - 550	5	7	*	4.5	3.7	6	5	*	5.6	4.6	8	3	*	7.4	6.1
Beam - 45 deg.	6	4	*	5.2	4.3	7	4	*	6.3	5.2	9	2	*	8.1	6.7
P75R20	4	14	26.9	3.7	3.1	5	10	17.9	4.8	4.0	7	5	28.1	6.7	5.5
CBCP - 650	5	8	*	4.5	3.7	6	6	*	5.6	4.6	8	4	*	7.4	6.1
Beam - 45 deg.	6	5	*	5.2	4.3	7	4	*	6.3	5.2	9	3	*	8.1	6.7

PAR16 & PAR20 Flood Lamps



PAR16



PAR20

Walls and Vertical Objects															
H	F.C.	L	W	S	H	F.C.	L	W	S	H	F.C.	L	W	S	
D = 2 FT					D = 3 FT					D = 4 FT					
45PAR16NFL	4	31	6.3	2.2	2.0	5	21	6.5	2.8	2.6	7	11	9.4	3.9	3.6
CBCP - 1,400	5	18	10.9	2.6	2.4	6	14	9.4	3.2	3.0	8	8	12.6	4.3	4.0
Beam - 27 deg.	6	11	20.1	3.0	2.8	7	10	13.5	3.7	3.4	9	6	16.4	4.7	4.4
50PAR20NFL	4	31	7.6	2.4	2.2	5	21	7.6	3.1	2.8	7	11	11.1	4.3	3.9
CBCP - 1,400	5	18	14.1	2.9	2.6	6	14	11.4	3.6	3.3	8	8	15.1	4.8	4.4
Beam - 30 deg.	6	11	30.6	3.4	3.1	7	10	17.0	4.1	3.7	9	6	20.3	5.3	4.8
60/75PAR16NFL	4	44	6.3	2.2	2.0	5	30	6.5	2.8	2.6	7	15	9.4	3.9	3.6
CBCP - 2,000	5	26	10.9	2.6	2.4	6	20	9.4	3.2	3.0	8	11	12.6	4.3	4.0
Beam - 27 deg.	6	16	20.1	3.0	2.8	7	14	13.5	3.7	3.4	9	8	16.4	4.7	4.4

PAR16 & PAR20 Spot Lamps



PAR16



PAR20

Walls and Vertical Objects															
H	F.C.	L	W	S	H	F.C.	L	W	S	H	F.C.	L	W	S	
D = 2 FT					D = 3 FT					D = 4 FT					
45PAR16NSP	4	111	1.8	0.8	0.8	5	76	2.0	1.0	1.0	7	38	2.9	1.4	1.4
CBCP - 5,000	5	64	2.7	0.9	0.9	6	49	2.7	1.2	1.2	8	28	3.6	1.6	1.6
Beam - 10 deg.	6	39	3.8	1.1	1.1	7	34	3.5	1.3	1.3	9	21	4.4	1.7	1.7
50PAR20NSP	4	138	1.6	0.7	0.7	5	94	1.8	0.9	0.9	7	48	2.6	1.3	1.3
CBCP - 6,200	5	79	2.4	0.8	0.8	6	61	2.4	1.2	1.2	8	34	3.2	1.4	1.4
Beam - 9 deg.	6	49	3.3	1.1	1.1	7	42	3.1	1.3	1.3	9	26	3.9	1.5	1.5
Walls and Vertical Objects															
H	F.C.	L	W	S	H	F.C.	L	W	S	H	F.C.	L	W	S	
D = 3 FT					D = 4 FT					D = 5 FT					
60/75PAR16NSP	5	114	2.0	1.0	1.0	7	58	2.9	1.4	1.4	9	34	3.8	1.8	1.8
CBCP - 7,500	6	74	2.7	1.2	1.2	8	42	3.6	1.6	1.6	10	27	4.5	2.0	1.9
Beam - 10 deg.	7	51	3.5	1.3	1.3	9	32	4.4	1.7	1.7	11	21	5.3	2.1	2.1

Walls and Vertical Objects	
H	Height from ceiling to center of beam
D	Distance from fixture to wall
F.C.	Footcandle at center of beam
L	Length of effective lighted area
W	Width of effective lighted area
S	Spacing of multiple fixtures to effectively light wall
*	Length of lighted area is in excess of 30 feet

Data assumes a maximum tilt of 30 degrees.

For horizontal surface data refer to Lamp Application Data sheets.

CBCP - Center Beam Candlepower