




solid state

LED Flush Mount
ENERGY STAR® Qualified

Close-To-Ceiling

	Type _____		
	-09ET30K	-20ET30K	-20ETUM30K
P2302	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
P2303	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish			Light Source	Dimensions (Inches)	
	Brushed Nickel	Antique Bronze	Antique Bronze		A	B
P2302	-09ET30K	-20ET30K	-20ETUM30K	LED (included)	11	4
P2303	-09ET30K	-20ET30K	-20ETUM30K	LED (included)	13-1/4	4-3/4

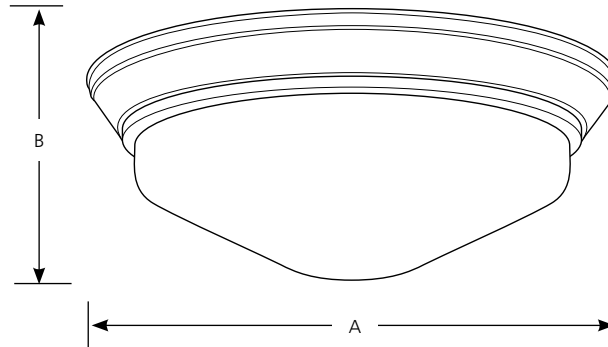

Specifications:

General

- Etched glass (-09ET30K, -20ET30K) or Etched amber glass (-20ETUM30K) bowl:
 - P2302 - 9" dia.
 - P2303 - 12" dia.
- Plated Brushed Nickel (-09ET30K) finish
- Painted Antique Bronze (-20ET30K, -20ETUM30K) finishes
- Steel construction
- LED Module is replaceable
- ENERGY STAR® qualified
- 5 year warranty

Mounting

- Ceiling flush mount
- Ceiling pan covers a standard 4" hexagonal recessed outlet box
- Mounting strap for outlet box included

Electrical

- Pre-wired

Light Engine

- 17.5w / 0.15 amps at 120VAC, 60Hz
- Lumens: 1195
- 68.1 lumens per watt
- TM-21 42000 hour life
- CCT: 3000K
- 82 CRI
- Dimmable to 10% brightness, see list below for known compatible controls:
 - Lutron: LG-600PH-LA, S-600H, DV-600P, AY-600P, S-600P, FA-600P, Q-600P, DVELV-300P, VTELV-600, NTELV-300, NELV-450
 - Pass & Seymour: DCL453PTCCCV6
 - Leviton: AWRMG-MAW
 - We do not recommend using digital dimmer controls

Labeling

- cCSAus Damp location listed



Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 08/13