



Compact Fluorescent


Ashmore
Energy Star

Outdoor

Type _____

	-31EB	-33EB
P5874	<input type="checkbox"/>	<input type="checkbox"/>
P5875	<input type="checkbox"/>	<input type="checkbox"/>
P5876	<input type="checkbox"/>	<input type="checkbox"/>
P5877	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish			Dimensions (Inches)			
	Black	Cobble-stone	Lamping	A	B	C	D
P5874	-31EB	-33EB	1-4 pin 26 CFL	6-3/8	14-7/8	9-1/2	4-1/2
P5875	-31EB	-33EB	1-4 pin 26 CFL	8-3/8	17	10-1/2	4-1/2
P5876	-31EB	-33EB	1-4 pin 26 CFL	9-3/8	20-1/4	12-3/4	5-5/8

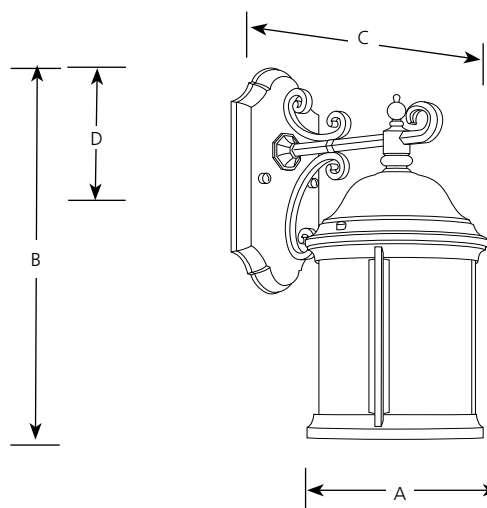

Specifications:

General

- Etched water seeded glass panels
- Each glass panel replaceable
- Cast aluminum construction
- Solid brass interior components
- Scrolled support arms
- Cast wall plate
- Painted black (-31) or cobblestone (-33) finish
- Energy Star certified

Mounting

- Wall mount outdoor
- Covers a standard 4" recessed octagonal recessed outlet box
- Mounting strap included

Electrical

- Units have a 4 pin GX24-3q base socket
- 120v NPF electronic ballast



Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 11/07