



← **LONGER VENTING AVAILABLE**

Available in 40 and 50 Gallon Tall Gas Models

Get 4 MORE YEARS with ProtectionPlus™

- ▶ **NEW FVIR Compliant!**
- ▶ **NEW LP Models Available!**
- ▶ **6-Year Limited Tank and Parts Warranty***
- ▶ **With ProtectionPlus™ the 6-Year Limited Tank Warranty Becomes 10 Years!**

- Adjustable coaxial vent allows flexibility of installation – uses outside air for combustion and requires no electrical power
- Aluminum vent and cap base to prevent staining of building exterior
- Brass drain valve
- Factory installed temperature and pressure relief valve
- R-Foam® insulation for superior heat retention
- Exclusive Rheemglas® tank lining resists corrosion and prolongs tank life
- Heat saving flue baffle design
- Gas control and combination thermostat
- Piezo ignition
- Patented magnesium anode rod design incorporates a special resistor that protects the tank from corrosion
- High temperature silicone bands reduce venting installation time
- Internal air tube for reduced footprint
- Meets ANSI Z21.10.1 requirements for Flammable Vapor Ignition Resistance (FVIR)
- Meets or exceeds National Appliance Energy Conservation Act (NAECA) requirements

* See Residential Warranty Information Brochure for complete warranty information.


Energy Factor and Average Annual Operating Costs based on D.O.E. (Department of Energy) test procedures. D.O.E. national average fuel rate natural gas 91c/therm; LP \$1.23/gallon.



DESCRIPTION			FEATURES						DIMENSIONS						ALTITUDE RATING		ENERGY INFO.		
TYPE	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/HR.		RECOVERY IN G.P.H. 90° RISE		FIRST HOUR DEL. G.P.H.		HT. TO VENT A	TANK HT. B	DIAMETER C	HT. TO GAS CONN. D	VENT SIZE E	HT. TO SIDE T&P F	SHIP. WT. (LBS)	UP TO "X" FEET ABOVE SEA LEVEL		ENERGY FACTOR NAT.	AVG. ANN. OPER. COSTS NAT.
			NAT.	LP	NAT.	LP	NAT.	LP								NAT.	LP		
TALL	40	22DV40F	38	30	38.4	30.3	66	64	68-1/4	59-3/4	19-3/4	14-1/4	6	51-5/8	155	2,000*	7,700	0.59	\$231
	50	22DV50F	38	34	38.4	34.3	80	79	68	59-1/2	21-3/4	14-1/4	6	52-1/2	165	6,000	6,000	0.58	\$235

• Specify LP gas when ordering. Add "PF" suffix to the model number. Example 22DV40PF

VENTING – ROUGHING IN DIMENSIONS (INCHES)			SIDE VENTING (G) WITH INCLUDED VENT KIT		SIDE VENTING (G) WITH OPTIONAL VENT KIT		OPTIONAL HEIGHT (A) WITH VENT KIT
TYPE	MODEL NUMBER	4 FEET VENTING AVAILABLE	MIN.	MAX.	MIN.	MAX.	
TALL	22DV40F	Horizontal & Vertical	9-1/8	19-1/8	9-1/8	48**	68-1/4 – 107-3/4†
	22DV50F		8-1/8	18-1/8	8-1/8	48**	



SCAQMD rule 1121 compliant
 * High altitude model available upon request: 22DV40HF
 ** Horizontal Vent Kit #SP20131. Venting dimensions are approximate.
 † Vertical Vent Kit #SP20132. Venting dimensions are approximate.
 • If side wall is combustible material, 1" clearance must be included in adjustment range.

These units are designed to meet or exceed ANSI (American National Standards Institute) requirements and have been tested according to D.O.E. test procedures and meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria for energy consuming appliances.

Before purchasing this appliance, read important energy cost and efficiency information available from your supplier.

NEW LONGER VENTING!



- Up to 4 feet above the water heater and 4 feet from an outside wall.

Order Horizontal Vent Kit: #SP20131

Order Vertical Vent Kit: #SP20132

Rheem Exclusive Adjustable Coaxial Vent Allows Flexibility of Installation...

You may orient the Fury DV for easiest service access, because the adjustable coaxial vent can swivel 360 degrees.

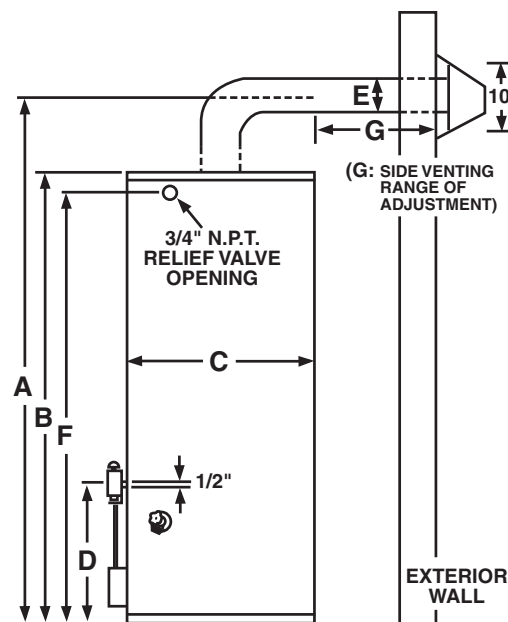

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.