



The new degree of comfort.™



Residential Electric
Marathon POU Water Heaters

Marathon® point-of-use non-metallic electric water heaters are durable, lightweight, easy to install and offer a longer warranty

Non-metallic Tank Features

- Seamless, blow-molded, polybutene tank – impervious to rust and corrosion
- Multiple layers of filament wound fiberglass give the tank unmatched strength
- Polyurethane insulation helps reduce energy consumption and standby heat loss
- Recessed drain valve is out of the way brooms and scrubbers
- High temperature polysulfone dip tube
- Tough molded polyethylene outer shell resists dents, scratches, and salt air
- All plastic tank eliminates the need for an anode rod

Easy Installation & Service

- Marathon point-of-use's lightweight tank is easy to maneuver and position
- Bowl shaped tank bottom allows complete sediment draining
- Water tight grommets keep out overhead moisture and condensation
- 3/4-Inch inlet and outlet connections
- Built for applications where larger water heaters won't fit, such as apartments, recreational property, and restrooms in offices and commercial buildings

Element Wattage and Voltage

- 15 and 20-Gallon with a 2,000 element wattage and 120-voltage; 20-gallon with a 3,000 element wattage and 240-voltage

Plus...

- Thermally fused element to protect against dry-firing; low watt, density for long life
- Full-flow, brass drain valve
- Temperature and pressure relief valve
- Standard replacement parts

Warranty


- Lifetime limited warranty on tank and 6 years on parts*
- Light duty commercial use: 10-year limited warranty on tank and 1 year on parts*

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



Rheem Marathon Point-of-Use
15 and 20-Gallon Capacities
Electric

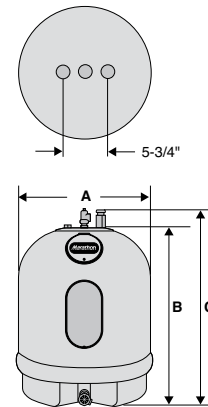

DESCRIPTION		FEATURES		ROUGHING IN DIMENSIONS (SHOWN IN INCHES)				ENERGY INFORMATION	
GAL. CAP.	MODEL NUMBER †	ELEMENT WATTAGE	VOLTAGE	TANK DIAMETER A	TANK HEIGHT B	HEIGHT TO WATER CONN. C	APPROX. SHIP WT. (LBS.)	ENERGY FACTOR	AVERAGE ANNUAL OPER. COST
15	MR15120	2000	120	21-3/4	31-3/4	35-3/4	58	N/A	N/A
19.9	MR20120	2000	120	23-1/2	30-1/2	34-1/2	61	N/A	N/A
19.9	MR20230	3000	240	23-1/2	30-1/2	34-1/2	61	N/A	N/A

†Canadian models have different model numbers than U.S. models. Add a "C" before the model number (e.g., CMR20230) when ordering.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT