

- Includes mirror defogging
- Dimmable LED task lighting to 1%
- Compatible with most Triac/Phase-cut dimmers
- Energy efficient LED lighting:

Kelvin	2700	4000
CRI	90+	90+
Lumens*	746-1488	746-1488
Lux**	485	485
R9 Value*	50+	50+
Foot-candles**	45	45
Watt Output - LED	48	48
Watt Output - LED with defogger on	84	84

* Based on a measurement of subset of sizes, shapes and lighting styles

** Measured at 18" from center of the mirror

Construction

- Anodized aluminum back frame
- Quality polished edge mirror
- Power cords installed for easy plugin installation
- Constructed for surface mounting
- Includes installation hardware


Codes/Standards Applicable

Vitality Mirror is UL certified to:

- UL 962
- CSA-C22.2, No. 12-82


Dimensions

Height: 40" (1016 mm)
 Width: 30" (762 mm)
 Depth: 1-3/4" (45 mm)

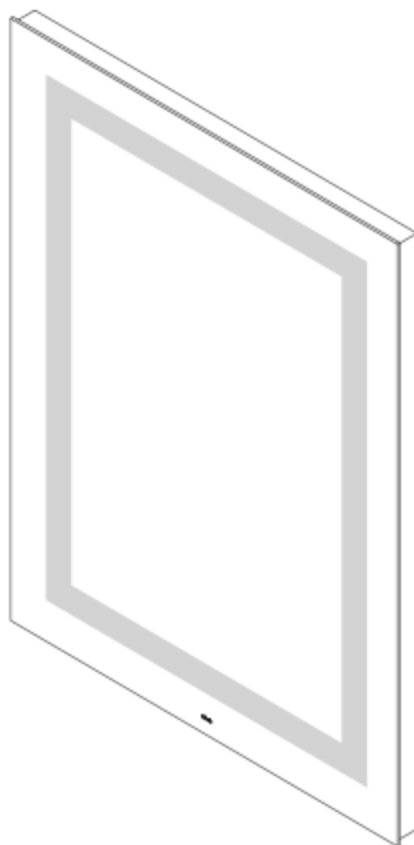

Model Number Key

Vitality	Mirror	Width	Height	Shape	Light Pattern	Edge Type	Options	Color Temp
Y	M	30	40	R = Rectangle	I = Inset	FP = Flat, Polished	D = Defogger	3 = 2700K 4 = 4000K

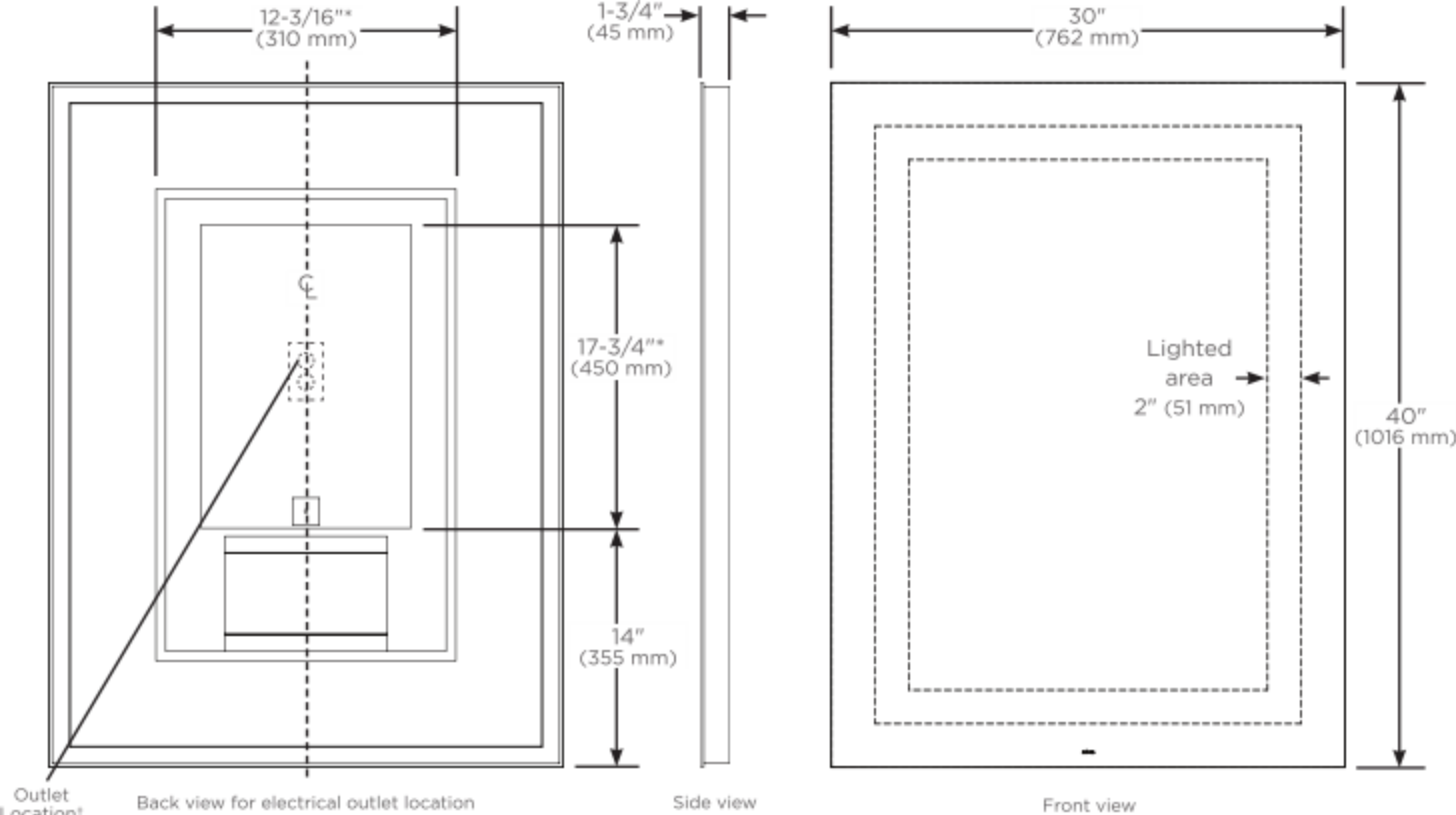

Outlet Location†

Back view for electrical outlet location

Side view

Front view

* Defogger Size

† See instructions for wiring and location