


Features

- Recess or surface mount
- Patented concealed surface-mounting system
- Mirrored doors and interior, matte silver interior
- Patented swing-out magnifying mirror
- Rust-free aluminum construction
- Three adjustable glass shelves
- Patented push button opener
- Polymer safety-back doors
- 3/4" (1.9 cm) Beveled mirrored doors and 1/4" (6 mm) beveled fascia
- 48" (121.9 cm) x 38-1/8" (96.8 cm) x 5-1/2" (14 cm)



TFC4838

Codes/Standards Applicable

Specified model meets or exceeds the following:

Description

None applicable

Model

Specified Model

TFC4838	Three door cabinet	
Required Ac	cessories - For Surface-Mount Installations Only	
SK38	Mirrored side kit (mounts to cabinet)	
SKL38	Mirrored side kit (mounts to cabinet with TLS light strip)	
Optional Acc	essories	
SLBTF48	Safety-lock box	
TLS48	12 bulb light strip	
CAHC-A	Cabinet mounted halogen light, chrome and glass shade	
CAHC-B	Cabinet mounted halogen light, all chrome shade	
CAHC-CE	Cabinet mounted halogen light, ebony black shade	
CAHC-CS	Cabinet mounted halogen light, matte silver shade	
Cabinet cann	ot be recessed when using a CAHC light. Refer to the Price Guide for more information.	

Page 1 of 2 1099141-4-**A** USA: 1-800-877-2376 www.robern.com

C SERIES THREE DOOR CABINET

Technical Information

Roughing-in opening	46-3/4" (118.7 cm) x 34-3/4" (88.3 cm) x 4" (10.2 cm)
Door opening angle	180°


Installation Notes

Install this product according to the installation guide.

When determining the height of the mirrored cabinet, ensure the mirrored door will clear all obstacles, such as a faucet. A minimum distance of 1" (2.5 cm) is required.

Secure the screws (provided) to a stud to avoid possible property and product damage. If this is not possible, anchors must be inserted before installing the screws.

Recessed cabinets project 1-7/8" (4.8 cm) from wall.

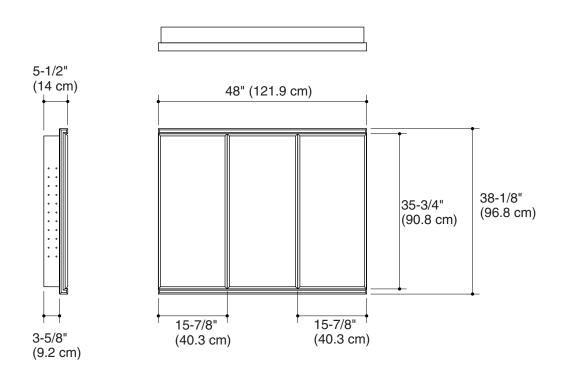

Product Diagram

