



## GEORGIAN PRESSURE BALANCE TRIM WITH INTEGRATED VOLUME CONTROL

ROHL Perrin & Rowe® Bath

**U.6700X** (Cross Handle)

**U.6700LS** (Lever Handle)

### FEATURES

- Pressure balanced concealed bath and shower mixer trim for R2012D rough valve with volume and temperature control
- Coverplate, dome and handle components made from solid brass
- Rotate handle clockwise for hot, counterclockwise for cold
- Move handle up for on, down for off
- English Bronze does not have any temperature indication on coverplate


### COLORS/FINISHES

- Polished Chrome
- Polished Nickel
- Satin Nickel
- Inca Brass
- English Bronze



### WARRANTY

- Limited Lifetime


To complete package order R2012D rough valve



U.6700X

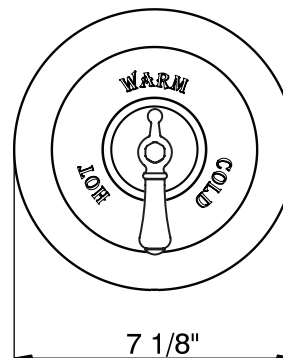


U.6700LS



## INSTALLATION INSTRUCTIONS

### Pressure Balance Trim with Integrated Volume Control Installation Instructions

For Model/s: ARB6400, ARB7400, AC600, AC700, A6400, A7400, U.6700, U.7700, U.6000, U.7000, A6200, A7200, BA600, & BA700

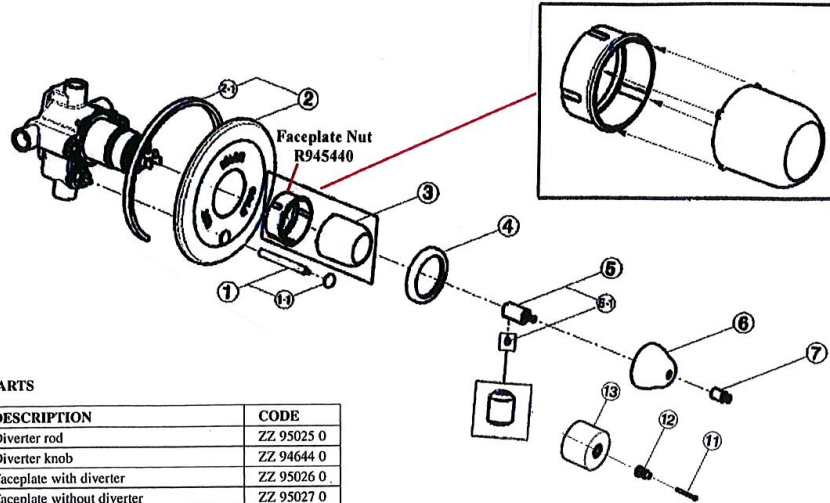

#### SPARE PARTS

POS.	DESCRIPTION	CODE
1	Diverter rod	ZZ 95025 0
1-1	Diverter knob	ZZ 94644 0
2	Faceplate with diverter	ZZ 95026 0
2	Faceplate without diverter	ZZ 95027 0
2	Faceplate with diverter - modern	ZZ 95074 0
2	Faceplate without diverter - modern	ZZ 95075 0
2-1	Gasket for faceplate	ZZ 95028 0
3	Dome cap	ZZ 95029 0
4	Cover ring	ZZ 95030 0
5	Cartridge rod adaptor	ZZ 95031 0
5-1	Set screw M.5x6	ZZ 94063 0
6	Lever escutcheon	ZZ 95032 0
7	Lever extension	ZZ 92671 0
11	Screw M.3,5x30	ZZ 95078 0
12	Extension	ZZ 93497 0
13	Modern dome cap	ZZ 95077 0

#### Trim Parts Instructions:

- Mount Sealing Gasket (2-1) into Faceplate (2)
- Thread on Diverter Rod (1) if applicable
- Remove faceplate nut (R945440) from valve and install faceplate (2)
- Thread on faceplate nut (R945440)
- **Please note: faceplate nut is provided on the rough valve not with the trim**
- Use Cover Sleeve (3) as a wrench to tighten the faceplate nut into place
- Slide Trim Ring (4) onto Cover Sleeve (3) to hide the edge of the Faceplate nut (R945440)
- **Please note: O-ring on (4) is installed on the inner diameter of the Trim Ring (4)**
- Install Cartridge Interface (5) onto stem of cartridge
- Use of 2.5 MM Allen key is needed
- Slip Trim cover (6) against cartridge interface (5)
- Install Handle Spacer (7) and tighten screw (5-1)
- Install lever or cross handle onto Handle Spacer (7)
- Use of 2.5 MM Allen key is needed
- Thread on Diverter button (1-1)
- Test. Adjust if necessary.
- 3/8" Extension Nut available; part # R945440/2
- Extended stem available; part # 30134

SPECIFICATIONS DETAILS:			
5-4 GPM @ 90 PSI			
• Unique volume control with pressure balance			
• Integrated stops			
• Min. install depth: 2"			
• Max. install depth: 3"			
• If PEX is utilized, oversize the supply line to 3/4" for full flow capacity			
• Install any hub spout 18" min. from the diverter or valve outlet			
• If using R20720 with a wall mounted tub spout with integrated diverter such as R20007 diverter tub spout, a trim kit will be needed by the installer. The tub outlet will be plugged.			
ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	1-111	DIVERTER ONLY, PRESSURE BALANCE VALVE	1
2	10021	SLEEVE, CARTRIDGE PRESSURE BALANCE	1
3	10022	NUT, PRESSURE BALANCE VALVE	1
4	10716	CARTRIDGE, PRESSURE BALANCE 40MM	1
5a	10092	BODY, PRESSURE BALANCE FOUR X 12"HP1	1
5b	10097	BODY, PRESSURE BALANCE FOR DIVERTER	1
6	10610	CARTRIDGE BASE EXTENSION FOR HK-40	1
7	2-076	SHUTOFF VALVE, PRESSURE BALANCE	2
8	80031	O-RING, 1-3/4"ID X 1-7/8"OD X 1/16"THK, AS-888-031	2
8	R945440	FACEPLATE NUT, PRESSURE BALANCE	1

