




ASSEMBLY INSTRUCTIONS

ITEM NO.: 9-3010-2-8

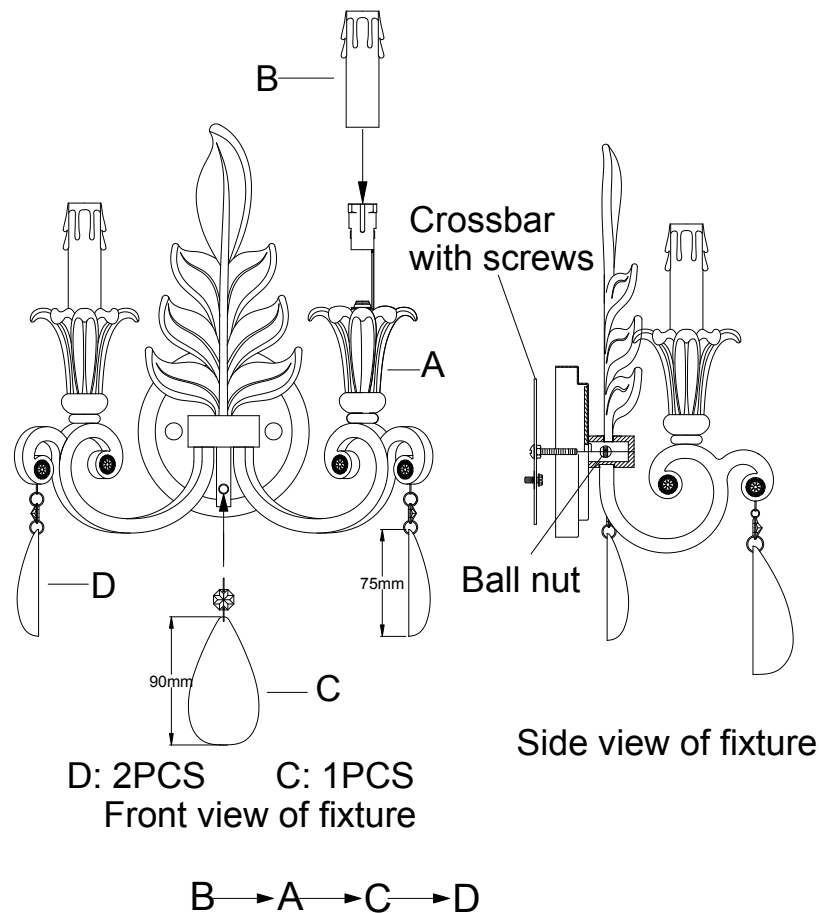

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn power to installation point OFF.
3. Locate the crossbar with screws and secure to outlet box with (2) outlet box screws.
4. Make the wires connections: (2 people recommended for this step) Using wire connectors connect the house ground wire to the fixture ground wire; Connect the house white wire to the fixture white (or ribbed side) supply wire; connect the house black (or red) wire to the fixture black (or smooth side) supply wire. Wrap all connections with approved electrical tape.
5. Carefully tuck all wires into the wall mounted outlet box and position the fixture body (A) over the outlet box. Align the holes in the back plate with the (2) mounting screws attached to the crossbar. Pass the fixture body (A) over the (2) mounting screws and secure by threading (2) ball nuts onto end of screws. Hands tighten until snug.
6. Carefully install the candle sleeve (B) over the socket.
7. Locate and attach the large crystal (C) and small crystal (D) to the ring at the bottom of fixture arm as shown in the diagram.
8. Install proper bulbs (not provided) to each socket referring to the markings and / or labels on the fixture for maximum wattage.
9. Retain power to the installation point ON and retain this sheet for future reference.