



Job Name:		Item Number:	
Specifier Name:		Sales Agency:	
Specifier Contact:		Agency Contact:	
Fixture Type:		Comments:	
Quantity:		Approval:	

12V 23" Glyde LED Module 3000K



L: 22 3/4" W: 4 1/2" H: 1/2"

Description

The super low-profile, Lx Glyde LED Modules can be used with 12 volt Ambiance Lx Cable Systems powered by magnetic or electronic low-voltage transformers. Lx Glyde LED Modules feature zero-pixelation and even light distribution through a uniquely engineered acrylic light guide. They are dimmable on magnetic and electronic low voltage systems. For magnetic systems, a magnetic low voltage (MLV) dimmer should be used. For electronic, an electronic low voltage (ELV) dimmer is recommended.

Specifications

Item Number	98835S-12
Finish	Black
Dimensions	L: 22 3/4" W: 4 1/2" H: 1/2"
Min. Spacing	23.75" on center
Glass Finish	Smooth White
Switch Type	On/Off Switch
Mounting Proc.	Lx Cable and Track
Voltage	12V
Color Temperature	3000°K
Lumens	1,100
Watts Consumed	30 watts
Efficacy	36.7 lm/w
Color Rendering	>95 CRI
Rated Average Life	50,000 hours to 70%
Safety Listing	cETL Listed for Dry Locations
Warranty	5 Year Limited Warranty

Instruction Sheets

- Trilingual (English, Spanish, and French) (990LXGLYDE)


Available Photometry

- LM79 Photometric and Integrating Sphere Report

Shipping Information:

Package Type	Product #	Quantity	UPC	Length	Width	Height	Cube	Weight	UPS Ship
Individual	98835S-12	1	785652255601	23.25	4.75	1	0.064	1.5	Yes
Master Pack	98835S-12	5	10785652255608						
Shipping Master		5	10785652255608	27.5	10.5	6.75	1.128	9.2	Yes

Component Diagram:

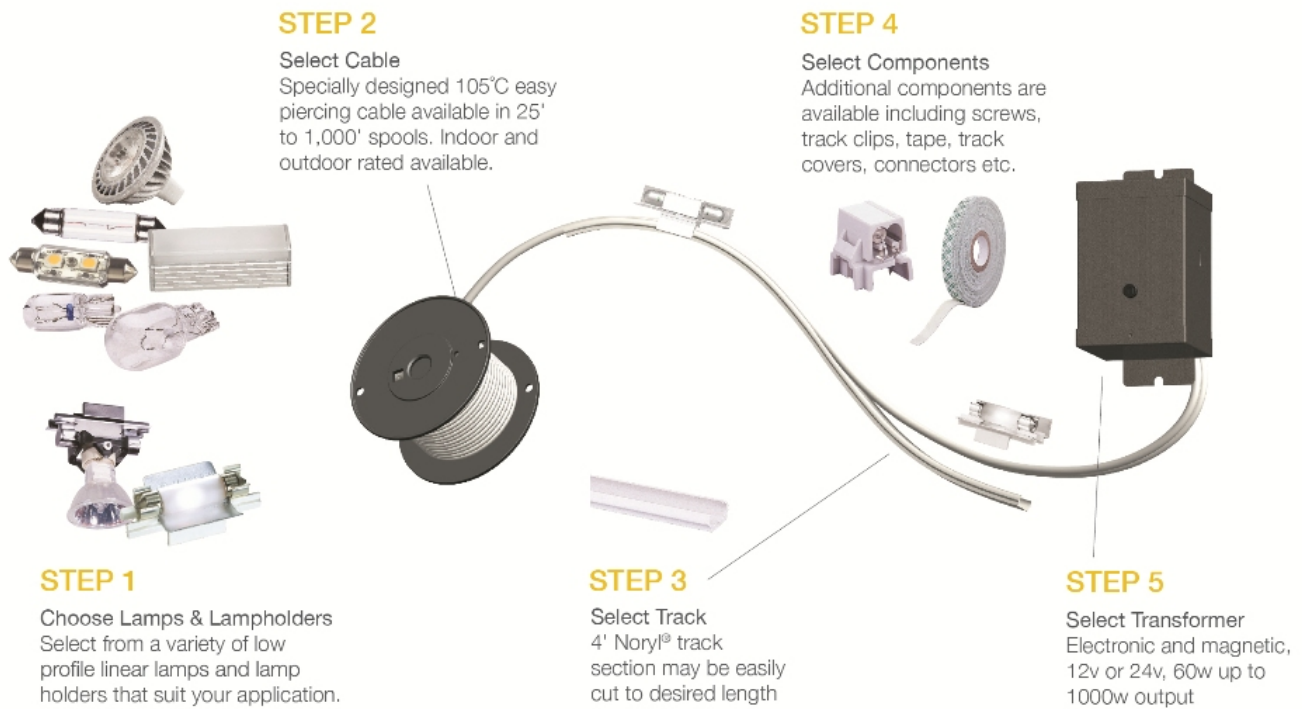

AMBIANCE
Lighting Systems

7400 Linder Ave. | Skokie, Illinois 60077 | 800-347-5483
© 2013 Sea Gull Lighting LLC, a Generation Brands Company.