

R - 1 8 7 4 Over the Range Convection Microwave Oven

R - 1 8 7 4



COLOR : Stainless Steel with glass window



over the range convection  
1.1 cu. ft.  
850 watts



cookware  
9" x 13" oblong  
4.5 qt. oval / 5 qt. round



13"  
ceramic  
turntable



Ideal for  
6-8 servings


**f** e a t u r e s

- **Stainless Steel** with smooth glass window—elegant and practical.
- **Compu Broil®**, **Compu Roast®** & **Compu Bake®** settings provide a new level of automatic ease. Broil a steak, roast a chicken or bake a cake to perfection at the touch of a key.
- **Large 13-inch diameter ceramic turntable**—offers ON/OFF flexibility to handle oversized or oblong-shaped dishes or containers.
- **Sensor Cook®** includes 12 Smart & Easy® sensor settings for the most popular microwaved foods. No need to set times or power levels— and no guesswork!
- **Interactive Cooking System** with Custom Help® includes options for English, Spanish or French.
- **CompuDefrost™** quickly defrosts meats and poultry by weight. Specific program for each category assures excellent, even results.
- **Keep Warm** lets you keep hot food hot up to 30 minutes after cooking is finished with no loss of food quality.
- **Built-in Exhaust System** offers horizontal or vertical discharge or ductless recirculation. It comes with a hood light and powerful fan.
- **High Rack** is included for two-level baking.
- **Low Rack** may be used for baking, roasting or broiling.


# R-1874 Over the Range Convection

## Specifications

<b>OVEN CAPACITY</b>	1.1 cu. ft.
<b>COOKING UNIFORMITY</b>	Turntable System with On/Off setting 13" diameter ceramic turntable
<b>DISPLAY</b>	7-digit, 2-color, lighted
<b>CONTROL</b>	Auto-Touch Controls
<b>SPECIAL FEATURES</b>	Keep Warm, Automatic Popcorn Sensor, Sensor Cook, Reheat Sensor, Convection Temperature Control (100°F-450°F), Low Mix/Bake, High Mix/Roast, Broil, Slow Cook, CompuBroil, CompuRoast, CompuBake, CompuDefrost Center, (ground meat, steaks, chicken pieces), Custom Help, Minute Plus, Kitchen Timer, 4-Stage Programming, 11 Variable Power Levels, 2-Speed Ventilation Fan, Light, Child Lock, Audible Signal Elimination, Demonstration Mode
<b>COLOR</b>	Stainless steel with glass window
<b>OVEN INTERIOR</b>	Stainless steel with light
<b>OUTPUT POWER</b>	850 Watts
<b>OUTSIDE DIMENSIONS (WHD)</b>	29 15/16" x 16 11/32" x 15 9/32"
<b>OVEN DIMENSIONS (WHD)</b>	17 1/8" x 8 1/16" x 13 13/16"
<b>APPROX. WEIGHT</b>	Net : 71 lb.      Shipping: approx. 85 lb.
<b>AC LINE VOLTAGE</b>	UL Rating: 120 Volts, single phase, 60 Hz, AC only CSA Rating: 116 Volts, single phase, 60 Hz, AC only
<b>AC POWER REQUIRED</b>	UL Rating: 1.6 kW, 13.2 Amps CSA Rating: 1.5 kW, 13.0 Amps
<b>SAFETY COMPLIANCE</b>	FCC, DHHS, UL/cUL listed
<b>UPC CODE</b>	074000 610910
<b>OPTIONAL ACCESSORIES</b>	RK-220 Charcoal filter for non-ducted installations included with product. Replacement filters available at extra cost.

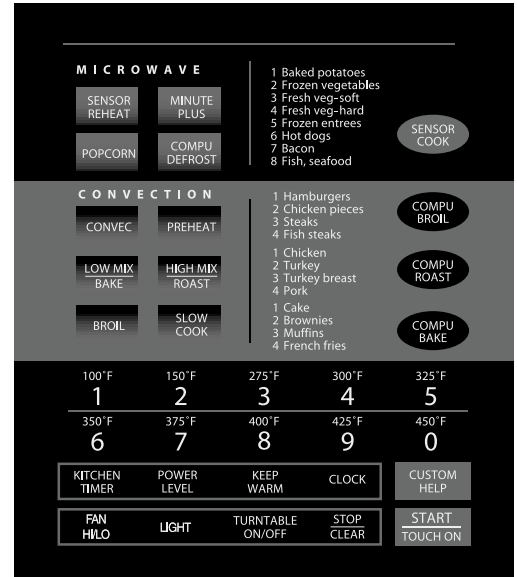

Design and specifications subject to change without notice.

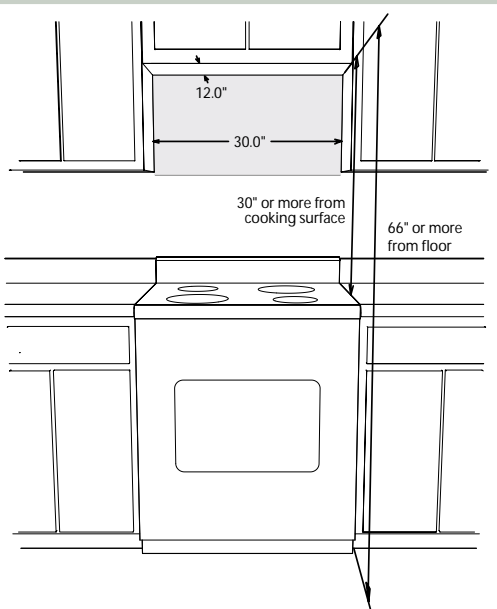

Each Sharp Over the Range microwave oven can be easily adapted for either outside ventilation (vertical or horizontal) or non-vented, ductless recirculation. Make sure the top of oven will be at least 66" from the floor and at least 30" from the cooking surface. A separate 15 amp. or greater electrical receptacle must be located in the cabinet directly above the microwave oven.

### Dimension Express :

To receive the most current specifications, call Dimension Express at (702) 833-3600 from a fax machine. Enter code 9026 for instructions and a directory of Sharp microwave oven products.

**LIMITED WARRANTY :** 7 years on magnetron tube, 2 years on all other parts, 2 years on related labor and in-home service. See Operation Manual or your dealer for complete details.

Sharp Electronics Corporation  
Sharp Plaza • Mahwah • NJ 07430-2135  
1-800-BE-SHARP • www.sharppusa.com

© 2002 Sharp Electronics Corporation

**SHARP** | be sharp™