

TILE & STONE


GENESIS
porcelain | ceramic



125 Ivory



150 Grey

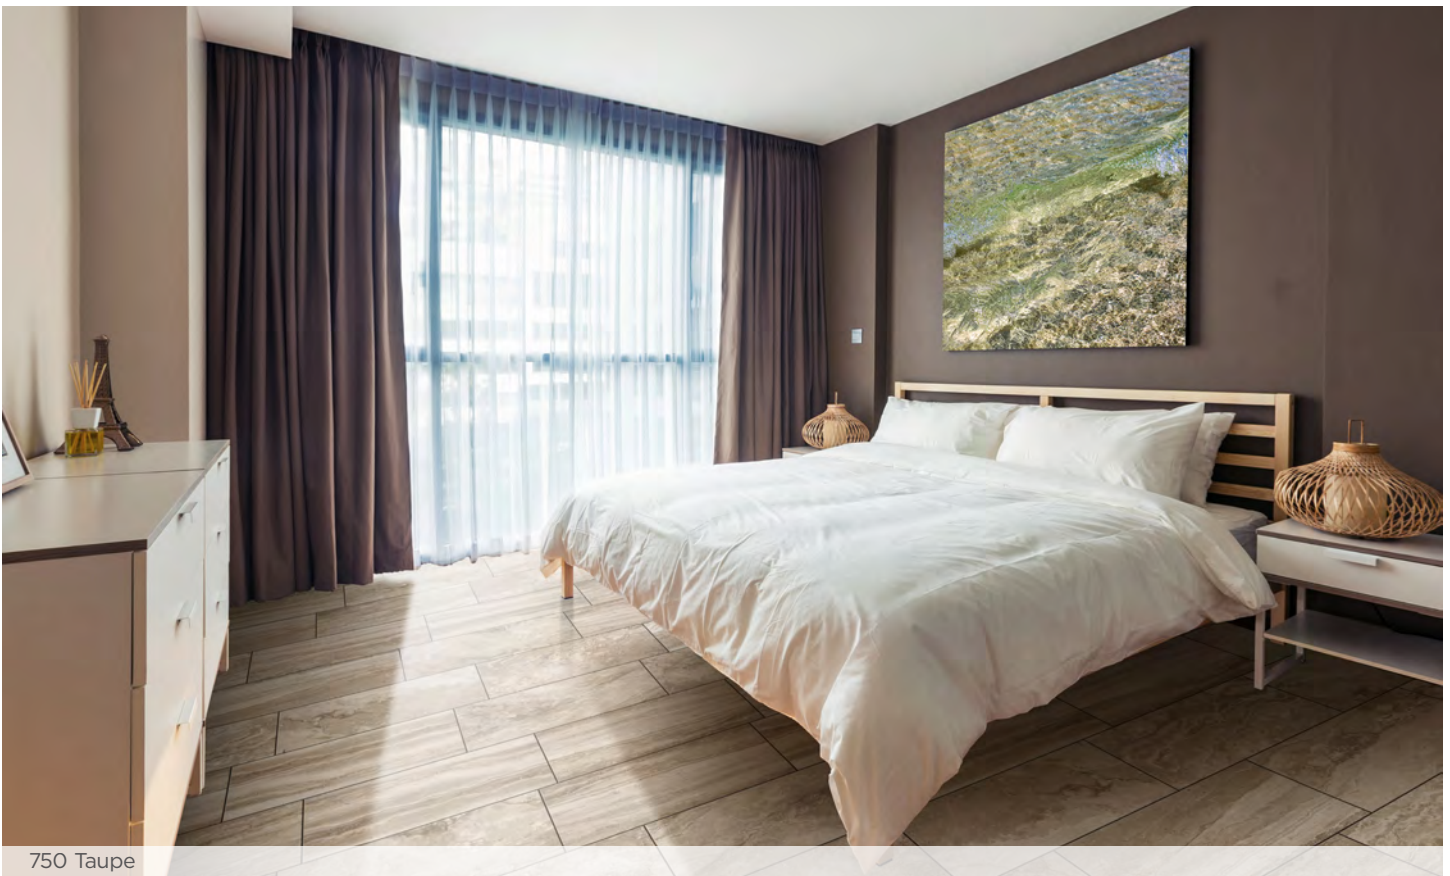

750 Taupe

Style Number	CS25V	CS24V	CS23V	CS26V	CS30V	CS31V	CS29V	CS27V	CS28V
Construction	porcelain	porcelain	porcelain	ceramic	porcelain	ceramic	porcelain	ceramic	ceramic
Tile Type	floor tile	floor tile	floor tile	wall tile	surface bullnose	wall bullnose	mosaic	listello #1	listello #2
Tile Size	12" x 24"	18" x 18"	13" x 13"	10" x 16"	2.75" x 13"	2" x 9.85"	13" x 13"	2.4" x 10"	2.8" x 10"

Technical


Wear Rating Group	4	4	4	N/A	N/A	N/A	N/A	N/A	N/A
Break Strength	337	337	292	191	N/A	N/A	N/A	N/A	N/A
Water Absorption %	< 0.30	< 0.30	< 0.30	> 12.5	N/A	N/A	N/A	N/A	N/A
DCOF	> 0.42	> 0.42	> 0.42	N/A	N/A	N/A	N/A	N/A	N/A
Shade Variation	V3	V3	V3	V3	V3	V3	V3	V3	V3
Installation Area	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Walls	Floors, Walls, Exteriors	Walls	Floors, Walls, Exteriors	Walls	Walls

A DCOF value of >0.42 is the new standard for tiles specified for commercial application in standard A1371-2012, Section 9.6. It replaces the SCOF value of >0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com


MANUFACTURER'S WARNING:

- Tiles with DCOF AcuTest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A137.1 section 6.2.2.110, available at www.tcnatile.com/sections6.2.2.110.html.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.


Colors



125 Ivory




150 Grey




750 Taupe


CS29V mosaic



125 Ivory



150 Grey



750 Taupe

CS27V listello #1



125 Ivory



150 Grey



750 Taupe

CS28V listello #2



125 Ivory



150 Grey



750 Taupe

