


## **NORTHINGTON SMOOTH**

Engineered



shawfloors.com

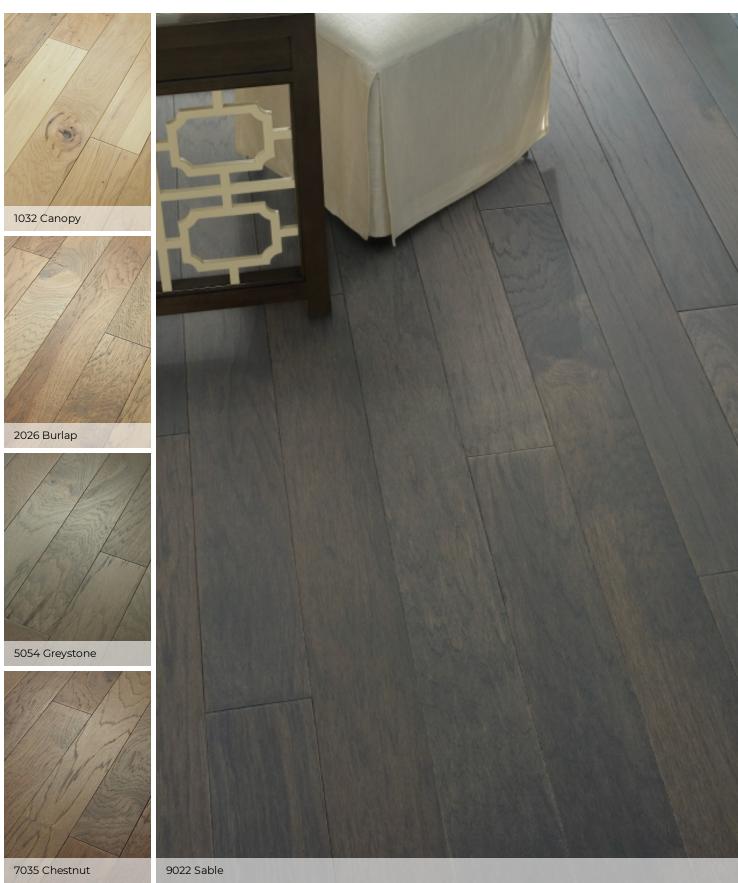


## **NORTHINGTON SMOOTH**



	US Units	Metric Units
Style Number	SW669	
Construction	Engineered	
Species	Hickory	
Nominal Overall Thickness	1/2"	12 mm
Nominal Width	4.94"	125.48 mm
Finish	ScufResist Platinum	
Gloss Level	7%	
Surface Texture	Smooth	
Edge Description	Micro Bevel	
End Description	Micro Bevel	
Profile	Tongue And Groove	
Weight per Carton	36 lbs	16.32 kg
SQFT per Carton	15.8 sq ft	1.46 sq m
SQFT per Pallet	948 sq ft	88.07 sq m
Installation Methods	Nail, Staple, Glue, Floating	
Installation Grade	Above, On, Below	
Variation	High	
GREENGUARD® Certified	Yes	
Cradle-to-Cradle Certified	Yes	
Radiant Heat Approved	Yes	
Residential Warranty	Lifetime	
Commercial Warranty	5 Year Commercial	
Regional Availability	Not Available in Canada	
All measurements are nominal.	Cartons may include random lengths.	

**Trim Pieces** length: 78" (\*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are nonstocking - but are available through a quick-ship program. Delivery should take approximately 2 to 3 weeks.)

















Flush Reducer

**SRO12** \*Overlap Reducer SFS12

**SSO12** SCR12 Flush Stairnose \*Overlap Stairnose Threshold / Carpet Reducer

**TMD78** T-Molding

QTR96 Quarter Round



