

COLORED CAULKING

MK-10055 W SECOLOUS

GROUT SIM

COLORED CAULKING

- Maximum joint width and depth should not exceed 1/4"
- Designed for use around tubs and sinks with sanded grout
- Used where horizontal and vertical surfaces meet
- Available in sanded and smooth

MK 100% SILICONE CAULK

- For interior and exterior use with tile or stone
- Flexible material for use on expansion joints
- Suitable for wet and submerged areas
- ASTM C920 / C794

REVIVE

- Water-based urethane acrylic grout stain and sealer
- For revitalizing or changing color of older sanded or non-sanded grouts
- Designed to help protect against moisture and staining

GROUT SEALER

- Penetrating silicone sealer suitable for porous, absorbent masonry, clay, stone, marble and portland cement grouts
- Water-based silicone resin designed to protect grout surfaces from stains and water

BURST

- Powerful easy-to-use additive that accelerates set time
- Does not affect grout performance characteristics
- Excellent for repair work

Merkrete Grout Solutions **COVERAGE CHARTS**

PROGROUT PLUS / INTEGRA / DURACOLOR Per 25-lb. Bag

NOMINAL TILE SIZE		JOINT WIDTH			
	1/8"	1/4"	3/8"	1/2"	
2" x 2" x 1/4"	93	48	33	26	
4" x 4" x 3/8"	122	62	42	32	
6" x 6" x 3/8"	182	92	62	47	
8" x 8" x 3/8"	242	122	82	62	
12" x 12" x 3/8"	362	182	122	92	
16" x 16" x 3/8"	482	242	162	122	
18" x 18" x 3/8"	542	272	182	137	
20" x 20" x 3/8"	602	302	202	152	

DURACOLOR Non-Sanded

Per 10-lb Box

	JOINT WIDTH		
NOMINAL TILE SIZE	1/16"	3/32"	1/8 "
1 " x 1 " x 1/4 "	53	36	27
2" x 2" x 1/4"	103	69	53
4" x 2" x 1/4"	137	92	69
4" x 4" x 3/8"	137	92	69
4" x 8" x 3/8"	182	122	91
6" x 6" x 3/8"	205	137	103
8" x 8" x 3/8"	272	182	137
12" x 12" x 3/8"	408	272	205

ELITE READY-TO-USE GROUT

Per 1-Gallon Unit

	JOINT WIDTH					
NOMINAL TILE SIZE	1/16"	1/8"	3/16″	1/4″	3/8″	1/2"
1" x 1" x 1/4"	103	50	33	24	15	11
2" x 2" x 1/4"	221	109	72	54	35	26
4" x 2" x 1/4"	313	155	103	77	50	37
4" x 4" x 3/8"	278	138	91	68	45	33
4" x 8" x 3/8"	417	208	138	103	68	50
6" x 6" x 3/8"	334	166	110	82	54	40
8" x 8" x 3/8"	557	278	184	138	91	68

PRO EPOXY Per 1-Gallon Unit

NOMINAL TILE SIZE	JOINT WIDTH			
	1/8"	1/4"	3/8"	
6" x 6" x 3/8"	106	58	40	
6" x 6" x 1/2"	80	42	28	
8" x 8" x 3/8"	142	72	58	
12" x 12" x 3/8"	210	106	72	
12" x 12" x 1/2"	156	80	54	
12" x 12" x 5/16"	84	42	28	
16" x 16" x 3/8"	280	142	96	
18" x 18" x 3/8"	312	156	106	
20" x 20" x 3/8"	344	176	118	

Coverages are approximate and may be reduced based on project conditions, actual tile size, waste and other factors. Please reference Merkrete's Grout Calculator for other tile sizes and more details

PAREXUSA

2150 Eastridge Ave. Riverside, CA 92507 www.parexusa.con 886-516-0061 660-316-0001 Tech Support: 800-226-2424 ©2022, Parex USA, Inc. MK G CC 1222










GROUT COLLECTION







ELITE

PROGROUT

- Stain resistant and color consistent
- Exceeds ANSI A118.6

PRODUCT SELECTION

• Superior performance

• Easy to spread and clean

• No sealing required

PROGROUT PLUS


ELITE READY-TO-USE GROUT

• For grout joints 1/16" to 1/2" wide

• High-performance, fast-setting grout

• Color consistent with no efflorescence

INTEGRA



- Color consistent thinset and grout are the same color
- Specifically designed for glass and mosaic tiles on floors and walls


PRO EPOXY


Chemical and stain resistant



- Color consistent; easy to use
 - Exceeds ANSI A118.3

www.merkrete.com
























Tile size, style, color, composition and areas of use constantly evolve. So must the tile installation products. Using the correct installation products is vital to the success of every tile project and selecting the right grout is just as important.



All colors available in Duracolor Sanded and Non-Sanded, Colored Caulking and Revive. PGP ProGrout Plus PE Pro Epoxy I Integra SC 100% Silicone Caulk E Elite

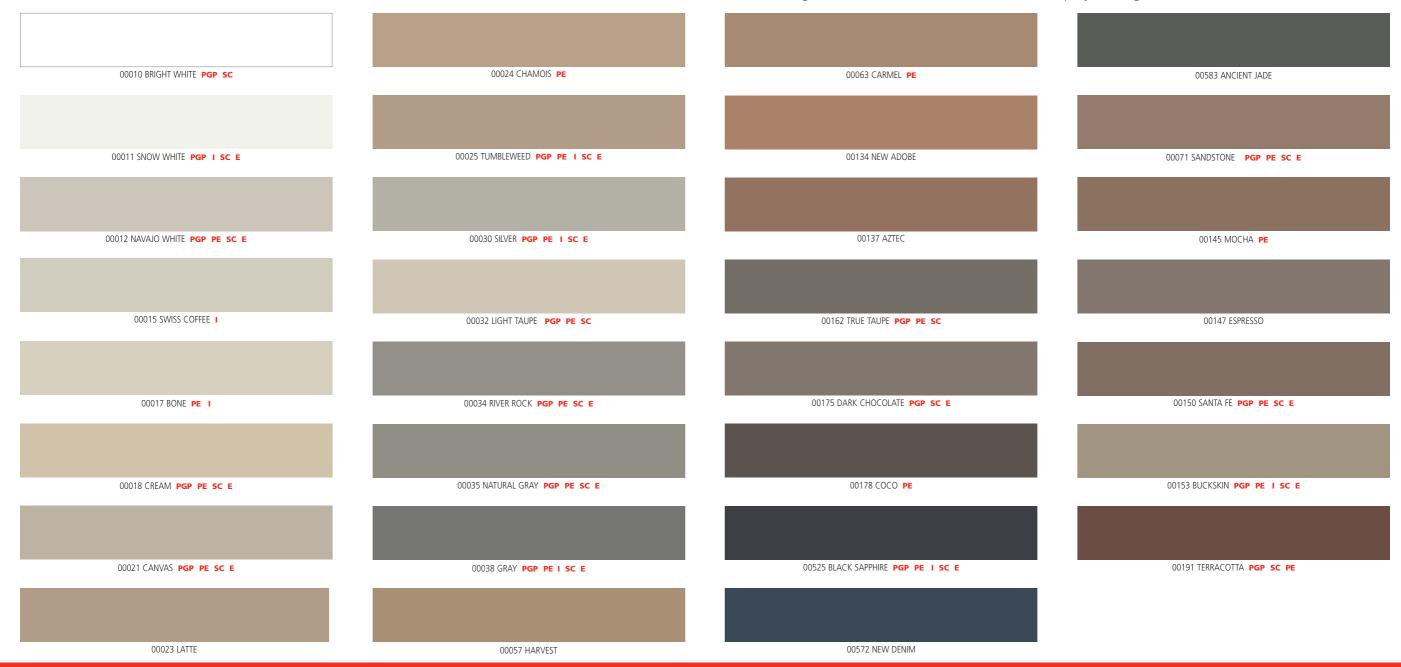

Sample colors shown are approximate to the final grout color. Final installed grout color may vary due to job conditions, tile porosity, mixing ratio, sealers, installation methods, temperature, or individual batches. Use grouts with the same batch number whenever possible. Different batch numbers should be dry blended together to obtain color uniformity. Follow ANSI A108.10 grouting practices. Please contact Customer Care Department for further questions at 877-547-8822.