

SWING SPOUT

WALL MOUNT FAUCET

SKU: 380330, 416234, 416235, 416236, 416237, 420969, 426713

BEFORE YOU BEGIN

We recommend consulting a professional if you are unfamiliar with installing plumbing fixtures. Signature Hardware accepts no liability for any damage to the faucet, plumbing, sink, counter top, wall, or for personal injury during installation.


Observe all local plumbing and building codes.

Unpack and inspect the faucet for shipping damage. If any damage is found, contact our Customer Relations team at 1-855-715-1800.

GETTING STARTED

- Ensure that you have gathered all the required materials that are needed for the installation.
- For these instructions, it is assumed that the old faucet has been completely removed and any necessary repairs or modifications to the water supply have been completed.

TOOLS AND MATERIALS:

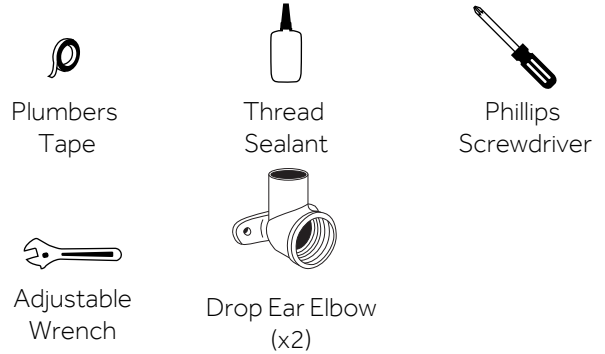

PLANNING

Use the faucet's PDF specification sheet as a reference when planning your installation. The specification sheet can be found and downloaded from the product page on our website.

Because the faucet specification measurements are approximate and slight variations may occur, we highly recommend performing any rough-in procedures with the faucet on site.

For Warranty information, please visit: signaturehardware.com/services/warranty

REVISED 02/19/2020
CODES: 443738, 443709, 443711
443713, 443715, 443716, 482232

SWING SPOUT


WALL MOUNT FAUCET

SKU: 380330, 416234, 416235, 416236, 416237, 420969, 426713

INSTALLATION


1. Prepare the in-wall plumbing for faucet installation. a pair of drop ear elbows will need to be roughed in behind the wall, 8" apart on-center, to make the connection to the faucet.

Important: Be sure to consider the total thickness of the finished wall, including tile (if applicable), when calculating how far back to rough-in the elbows.

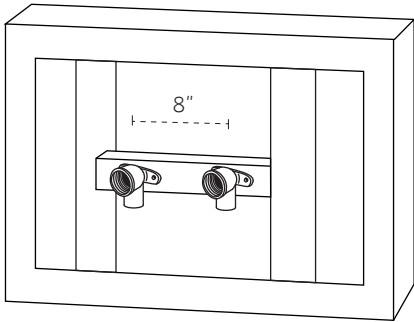


PROCEED WITH THE CONSTRUCTION OF THE FINISHED WALL. ONCE THE FINISHED WALL HAS BEEN COMPLETED, RESUME FAUCET INSTALLATION.


2. Connect the faucet's wall couplers to the installed drop ear elbows. Use any pipe nipples and adapters necessary to make the connection. Apply plumber's tape or thread sealant to the threads before connecting.

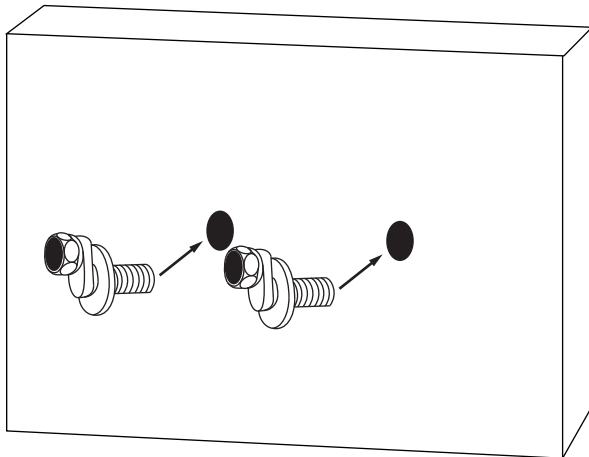

3. Insert one of the provided rubber O-rings into each of the faucet inlets, as shown. Connect the faucet to the installed wall couplers. Apply plumber's tape or thread sealant to the threads before attaching. Tighten firmly.

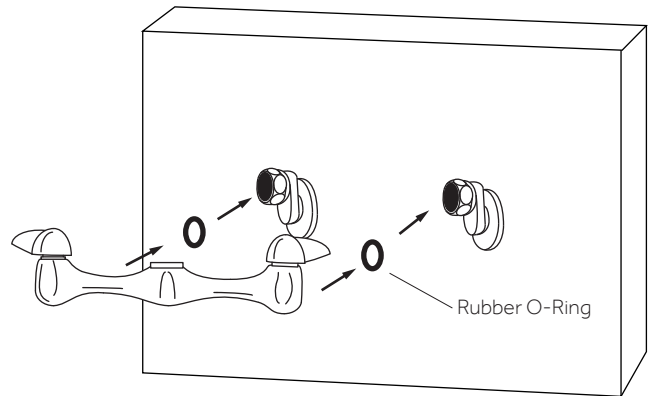

4. Attach the spout to the installed faucet body. Tighten the nut firmly using an adjustable wrench, but be careful not to overtighten.

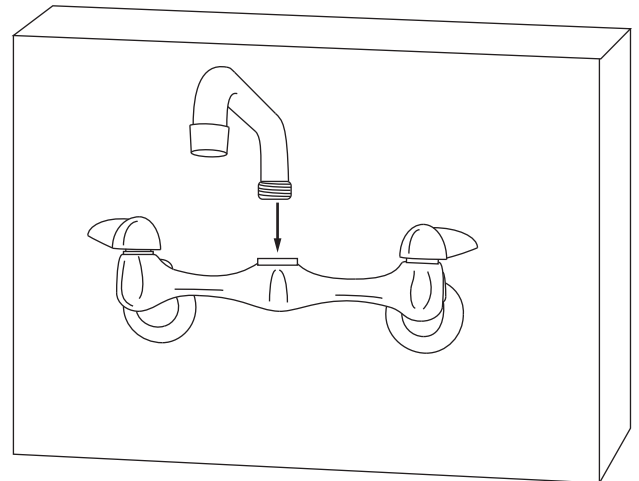


SWING SPOUT

WALL MOUNT FAUCET

SKU: 380330, 416234, 416235, 416236, 416237, 420969, 426713

5. Once installation is complete, turn the main water supply back on from underneath your sink. Check for any leaks underneath.

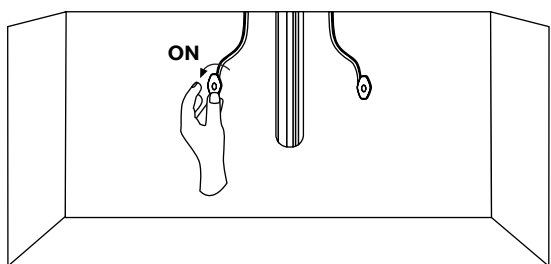

6. Remove the aerator from the spout and turn the faucet on. Ensure that both hot and cold water are running properly, and check for any leaks. Allow the water to flow for approximately 60 seconds to remove any dust or sediment within the water lines. Reattach the aerator.

