# THERMOSTATIC SHOWER VALVE AND VOLUME CONTROL HANDLE

SKU: 948806



## CONTENTS

| VOLUME CONTROL       | <br>PAGE 2 |
|----------------------|------------|
| VOLUME CONTROL VALVE | <br>PAGE 3 |
| THERMOSTATIC TRIM    | <br>PAGE 4 |
| THERMOSTATIC VALVE   | <br>PAGE 5 |


## FEATURES

Material: Brass Shape: Round Handle Type: Lever Features: Thermostatic Assembly Required: No Installation Type: Wall Mount Metal Handles Mounting Hardware Included: Yes Temperature Outlet Factory Preset to 104 Degrees Fahrenheit Temperature Can Be Easily Adjusted Up and Down to User's Comfort Level Scald Guard Protection High Temperature Limit Stop Thermostatic Technology Keeps Shower Temperature Within 1 Degree Celsius Optional Rough-in Valve

REVISED 10/05/2020

# IN-WALL SHOWER VOLUME CONTROL HANDLE

SKU: 948806

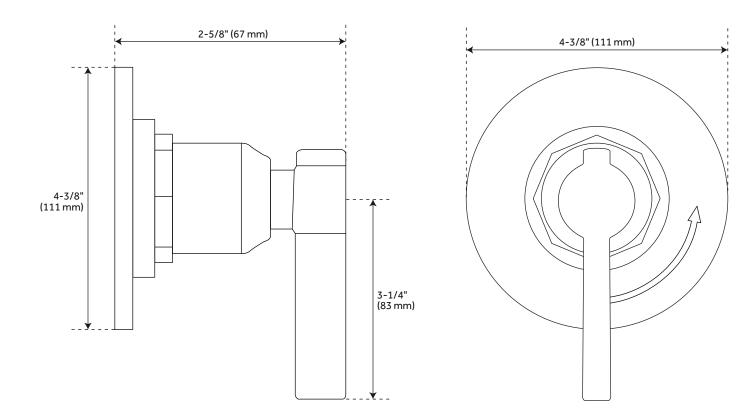

#### FEATURES

Diameter: 4-3/8" Depth: 2-5/8" Wall Thickness Range: 1" to 1-3/4"

#### **CODES/STANDARDS**

cUPC ASME A112.18.1/CSA B125.1 ICC/ANSI A117.1 (when installed according to ADA standards) Massachusetts Accepted

#### **PRODUCT IMAGE**





All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.


PAGE 2 Code: SHGF9007

ISI) SIGNATURE HARDWARE

See Website For Warranty Information www.signaturehardware.com/warranty

# OPTIONAL VOLUME CONTROL VALVE WITH 1/2" -OR- 3/4" CONNECTION

SKU: 948806

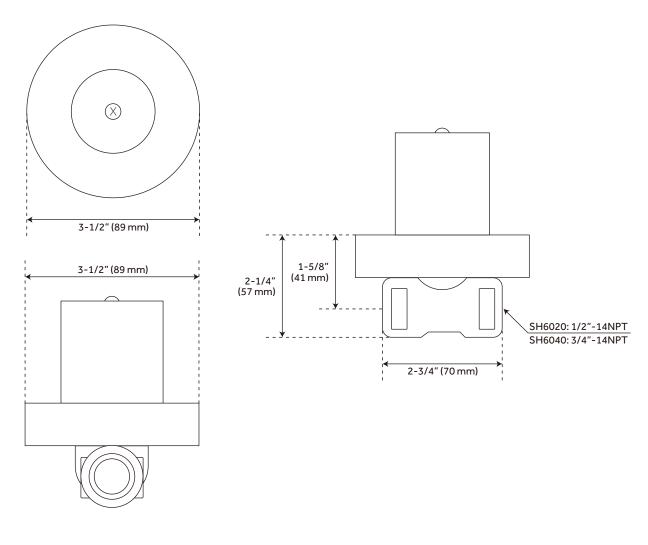

## FEATURES

Brass Valve Body Ceramic Cartridge Recommended Valve Installation Depth 1-5/8" to 2-3/8"

## CODES/STANDARDS

cUPC ASME A112.18.1/CSA B125.1 Massachusetts Accepted **PRODUCT IMAGE** 






All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.


PAGE 3 Code: SH6020, SH6040

SI) SIGNATURE HARDWARE

See Website For Warranty Information www.signaturehardware.com/warranty

# THERMOSTATIC SHOWER VALVE SKU: 948806

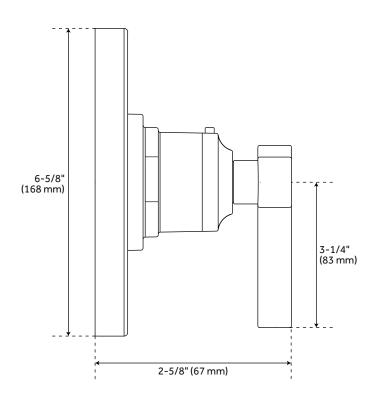

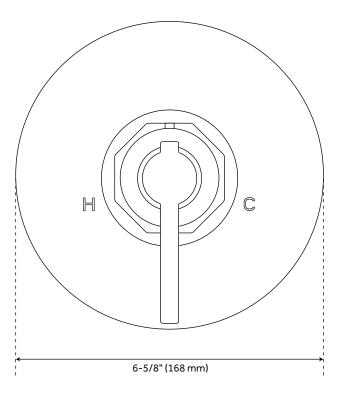

#### FEATURES

Diameter: 6-5/8" Depth: 2-5/8" Wall Thickness Range: 1" to 1-3/4"

## CODES/STANDARDS

cUPC ASME A112.18.1/CSA B125.1 Massachusetts Accepted

## PRODUCT IMAGE





All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.


PAGE 4 Code: SHGF9009

SI) SIGNATURE HARDWARE

See Website For Warranty Information www.signaturehardware.com/warranty

# OPTIONAL THERMOSTATIC VALVE WITH 1/2" -OR- 3/4" CONNECTION

## SKU: 948806

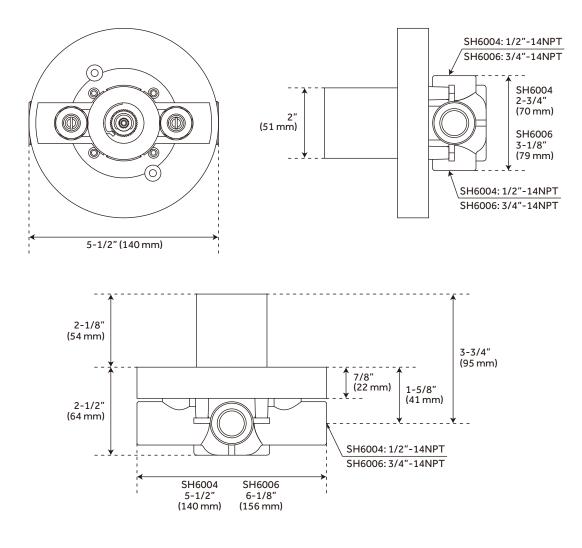

## FEATURES

Bronze Valve Body Ceramic Cartridge Integral Water Stops and Check Valve Recommended Valve Installation Depth 1-5/8" to 2-3/8" Must Be Installed in Accordance With Provided Installation Instructions

## CODES/STANDARDS

cUPC ASME A112.18.1/CSA B125.1 ASSE 1016 Type T Massachusetts Accepted

## **PRODUCT IMAGE**





All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

PAGE 5 Code: SH6004, SH6006

SIGNATURE HARDWARE

See Website For Warranty Information www.signaturehardware.com/warranty