## LEXIA THERMOSTATIC SHOWER SYSTEM WITH 3 BODY SPRAYS AND HAND SHOWER

SKU: 953782

Code: SHLE9009, SH6006, SHRSA122, SHRSB820RG, SHHS4030G, SHH1010, SHWES2050, SHLE9005, SH6103, SHLE9007, SH6040, SHBS6010E,

SH488921



ASME A112.18.1/CSA B125.1 WaterSense by IAPMO





#### **FEATURES**

Features: Rough-In Included; Hand Shower Included

Material: Metal

Assembly Required: Yes

Shape: Round Handle Type: Lever

Body Spray Flow Rate: 2.5 gpm (9.5 L/min) @ 80 psi

**Body Sprays: Yes** 

Number of Body Sprays: 3

Shower Head Installation Type: Wall

Number of Shower Heads: 1 Shower Head Diameter: 7-7/8" Shower Head Material: ABS Shower Head Spray: Rainfall Shower Arm Included: Yes Shower Arm Extension: 12-3/8" Shower Arm Height: 5-3/8" Shower Head IPS: 1/2"

Shower Head Swivel: Yes Hand Shower Length: 8-7/8" Hand Shower Hose Length: 60" Hand Shower Material: ABS

Hand Shower Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

Diverter Included: Yes Diverter Outlets: 3

Rainfall Shower Head Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

### LEXIA THERMOSTATIC SHOWER SYSTEM WITH 3 BODY SPRAYS AND HAND SHOWER

SKU: 953782

Code: SHLE9009, SH6006, SHRSA122, SHRSB820RG, SHHS4030G, SHH1010, SHWES2050, SHLE9005, SH6103, SHLE9007, SH6040, SHBS6010E, SH488921




#### **ADDITIONAL FEATURES**


- Thermostatic technology keeps shower temperature within 1 degree Celsius.
- Temperature outlet factory calibrated to 104 degrees Fahrenheit and can be easily adjusted up or down to user's comfort level.
- Six total settings allow for shared water flow between outlets, giving you the ability to use two functions at once.
- Metal handles.
- Single function shower head (full spray) with easy-clean silicone nozzles.
- Single function hand shower.
- 60" 72" stretchable metal shower hose.
- Adjustable angle for hand shower mount.
- Body spray jet swivels with a 3-9/16" surface area.
- Body spray flow rate: 2.5 gpm (9.5L/min) max @ 80 psi.
- Must be installed in accordance with provided installation instructions.
- Recommended valve installation depth 1-5/8" to 2-3/8"
- Included Rough-in valves:
- Thermostatic rough-in valve features scald guard protection, high temperature limit stop, integral water stops and check valve, a ceramic cartridge, and a bronze valve body.
- Volume control rough-in valve features a ceramic disc cartridge and brass valve body.
- Diverter valve features a ceramic disc cartridge and brass valve body. An available Single-Function Diverter valve Cartridge restricts water flow to one outlet at a time.


REVISED 1/23/2024

### LEXIA THERMOSTATIC SHOWER VALVE TRIM

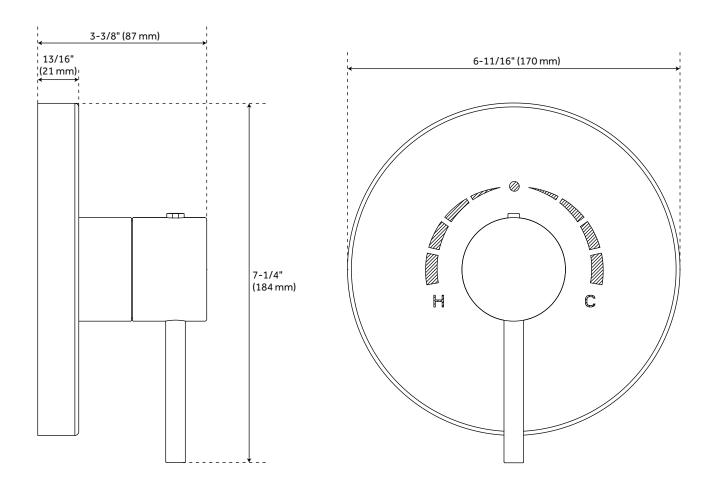


# LEXIA THERMOSTATIC SHOWER ROUGH-IN VALVE

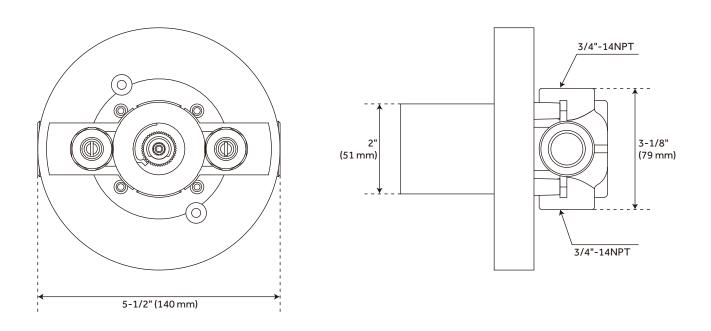


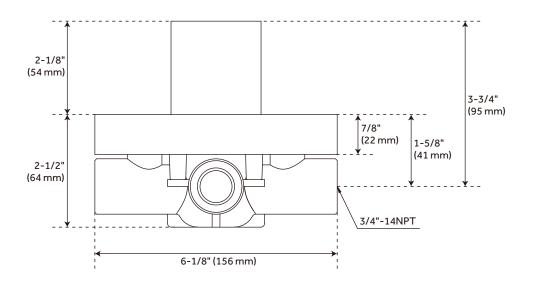


### LEXIA 3-WAY IN-WALL SHOWER DIVERTER

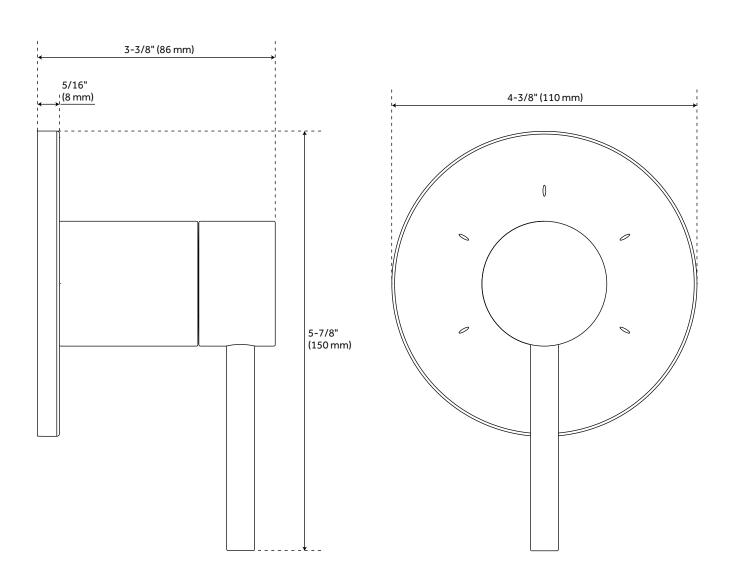


### LEXIA DIVERTER ROUGH-IN VALVE

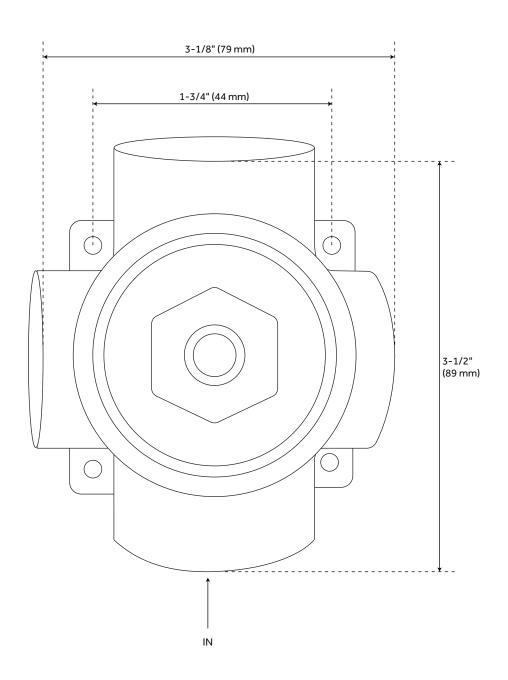


## LEXIA IN-WALL SHOWER VOLUME CONTROL TRIM

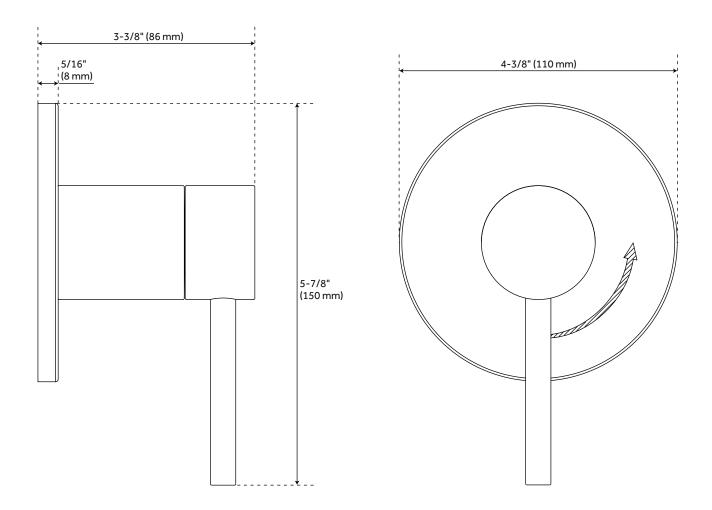



### LEXIA VOLUME CONTROL ROUGH-IN VALVE

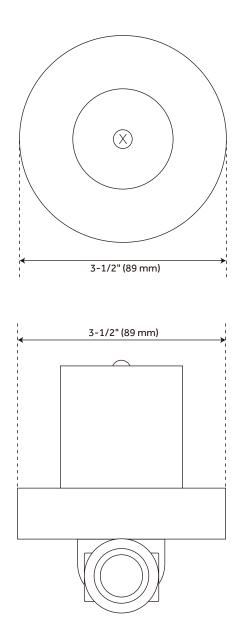

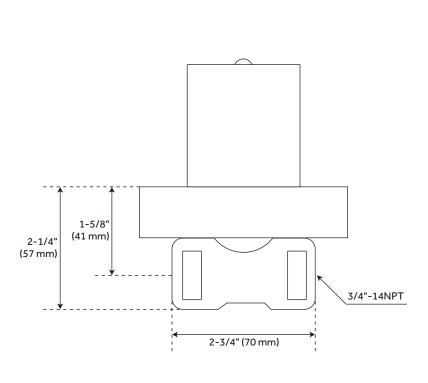


### LEXIA WALL-MOUNT SHOWER HEAD

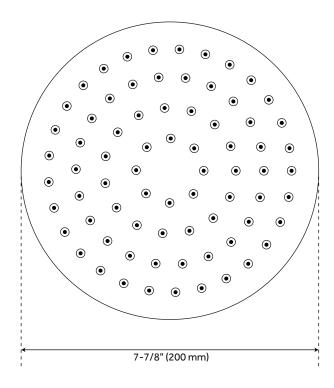


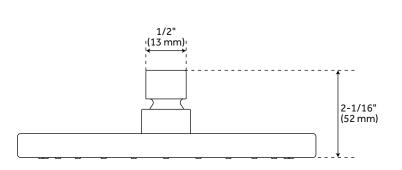


### LEXIA WALL-MOUNT SHOWER ARM

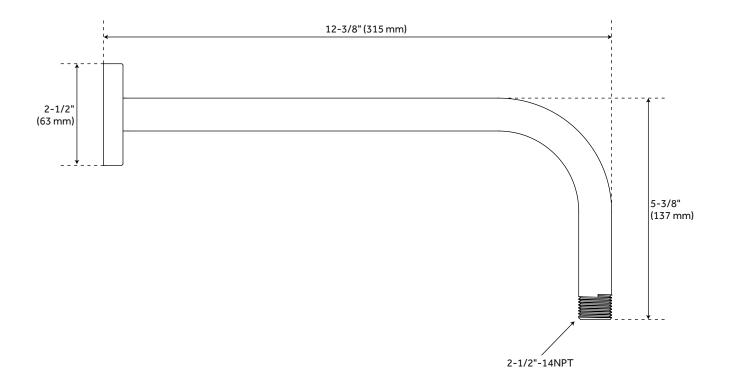



### LEXIA HAND SHOWER



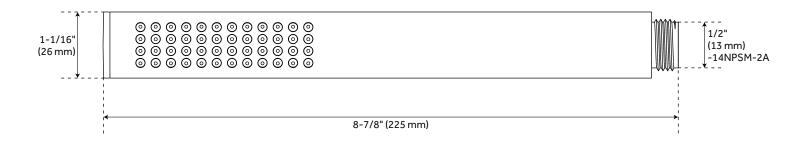



### LEXIA HAND SHOWER HOSE

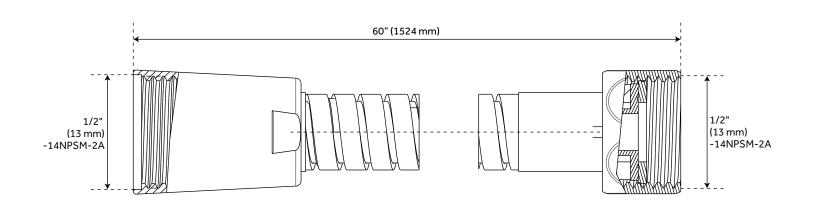





# LEXIA SWIVEL WATER SUPPLY ELBOW AND BRACKET









### **LEXIA BODY SPRAY**

