



Slimline® Bedpan Washer Model BPW-1110 Flushometer

Description

Slimline® Bedpan Washer Water Closet Flushometer, for floor mounted or wall hung top spud bowls. Includes Elbow and Pipe Support for installation when replacing an existing Flushometer with a lower water supply rough-in height (pipe between Elbow and Angle Stop supplied by others). Installation meets ADA height requirements.

Flush Cycle

- ☐ Model BPW-1110 Water Saver (3.5 gpf/13.2 Lpf)
- ☐ Model BPW-1110-1.6 Low Consumption (1.6 gpf/6.0 Lpf)

Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Closet Flushometer with the following features:

- Dual Filtered By-Pass
- Diaphragm, Handle Packing, Stop Seat and Vacuum Breaker to be molded from PERMEX™ rubber compound for Chloramine resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle with a Triple Seal Handle Packing
- 1" I.P.S. Screwdriver Bak-Chek™ Angle Stop
- 1" I.P.S. Chrome Plated Elbow and Solid Ring Pipe Support
- Free Spinning Vandal Resistant Stop Cap
- Adjustable Tailpiece
- High Back Pressure Vacuum Breaker Flush Connection with One-piece Bottom Hex Coupling Nut
- Spud Coupling and Flange for 1½" Top Spud
- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange

Bedpan Washer Diverter Assembly with the following features:

- Solid One-piece Body Construction
- Solid Brass Spray Arm
- Counter Balanced Pivot Assembly
- Diverter Valve Wall Support

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.6, and Military Specification V-29193.

Variations


- ☐ **BG** Bio-Gard™ Handle and Spray Arm
- ☐ **YI** Two Wall Bumpers (for open front seat without cover)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.



Listed by I.A.P.M.O.

BPW-1110

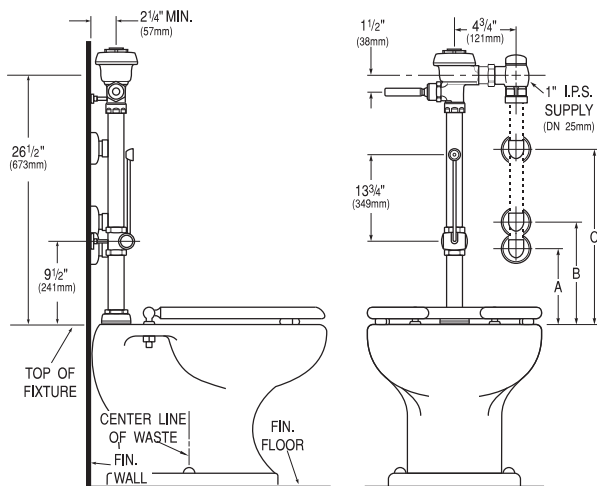

BPW-1010	A	B	C
Rough-In Height	9 (229 mm)	11-1/2" (292 mm)	24" (610 mm)
Length of pipe required	14-3/4" (375 mm)	13-1/4" (337 mm)	3/4" (19 mm)

RETROFIT INSTALLATION
USE WHEN INSTALLING WITH EXISTING WATER SUPPLY ROUGH-IN

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

SLOAN

Made in the U.S.A.

SLOAN VALVE COMPANY • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL 60131
PHONE: 1-800 982-5839 • FAX: 1-800 447-8329 • <http://www.sloanvalve.com>