


Important: Always unplug the power cord before installing or replacing bulb and before cleaning or other maintenance.

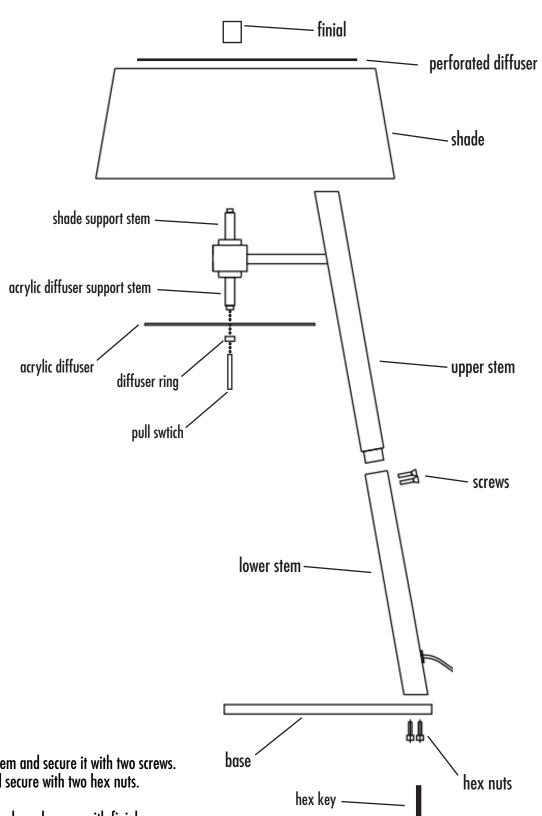

LAMP ASSEMBLY

- 1. Insert upper stem into lower stem and secure it with two screws.
- 2. Place lower stem into base and secure with two hex nuts.
- 3. Place shade on shade support.
- 4. Place perforated diffuser on shade and secure with finial.5. Place acrylic diffsuer under acrylic diffuser support stem and secure with diffuser ring.