STERLING
A KOHLER COMPANY

Finesse™ Peak®
Frameless sliding shower door
547808-59

Technology
- Frameless.
- 5/16" glass.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- Vertical blade handles.
- Out-of-plumb adjustability.
- Tempered glass ensures maximum safety and durability.
- Stainless steel hardware prevents rusting and corrosion.

Installation
- Not for use in hospitality.
- For residential use only.

Included Components
Additional Components:
 Hardware kit
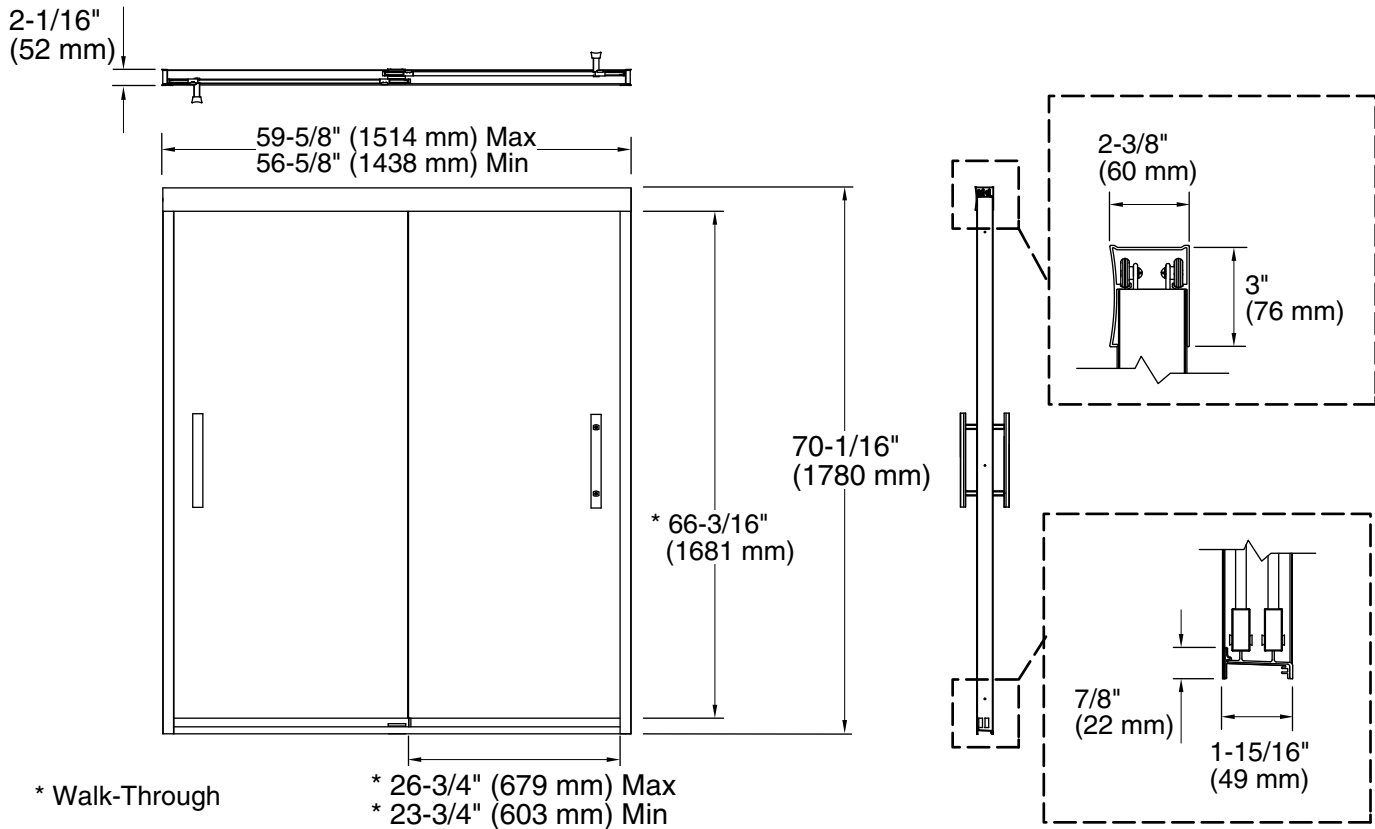
Codes/Standards
ANSI Z97.1
CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors
See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.

Color	Code	Description
	DR	
	N	
	PBL	
	S	

1-800-STERLING (1-800-783-7546)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.sterlingplumbing.com.
12-24-2019 14:57 - US/CA

2-1/16"
(52 mm)

59-5/8" (1514 mm) Max
56-5/8" (1438 mm) Min

70-1/16"
(1780 mm)

* 66-3/16"
(1681 mm)

2-3/8"
(60 mm)

3"
(76 mm)

7/8"
(22 mm)

1-15/16"
(49 mm)

* Walk-Through

* 26-3/4" (679 mm) Max
* 23-3/4" (603 mm) Min

Technical Information

All product dimensions are nominal.

Frame material:	Aluminum
Installation type:	For shower base installation
Opening style:	Sliding/Bypass
Opening Width - Min:	56-5/8" (1438 mm)
Opening Width - Max:	59-5/8" (1514 mm)
Walk-through - Min:	23-3/4" (603 mm)
Walk-through - Max:	26-3/4" (679 mm)
Glass thickness:	5/16" (8 mm)

Notes

Install this product according to the installation guide.

NOTICE: The vertical opening should be a minimum of 72" (1829 mm) to allow clearance for installation.

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.sterlingplumbing.com.
12-24-2019 14:57 - US/CA