



Performa™

60" AFD Bath/Shower

71040112



Features

- Durable high gloss finish.
- Modular design allows it to be moved around corners and through doorways with ease.
- Acrylic towel bar included on back wall.
- Above-floor-drain (AFD) rough-in.
- 17-1/4" (438 mm) bath depth (floor to top of threshold).
- 60" (1524 mm) x 29" (737 mm) x 77-3/4" (1975 mm) complete unit finished dimensions.

Material

- Compression molded from our exclusive solid Vikrell® material.

Installation

- Tongue-and-groove four piece modular design allows for easy snap together installation.
- Caulk required in seams for proper installation.

Components

Product includes:

71041112 60" AFD Bath

71044100 60" Bath/Shower Wall Set



Codes/Standards

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

Greenguard UL 2818 - Gold



HUD, UM Bulletin 73

STERLING® Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	KOHLER Biscuit

USA/Canada: 1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

7-13-2017 12:47

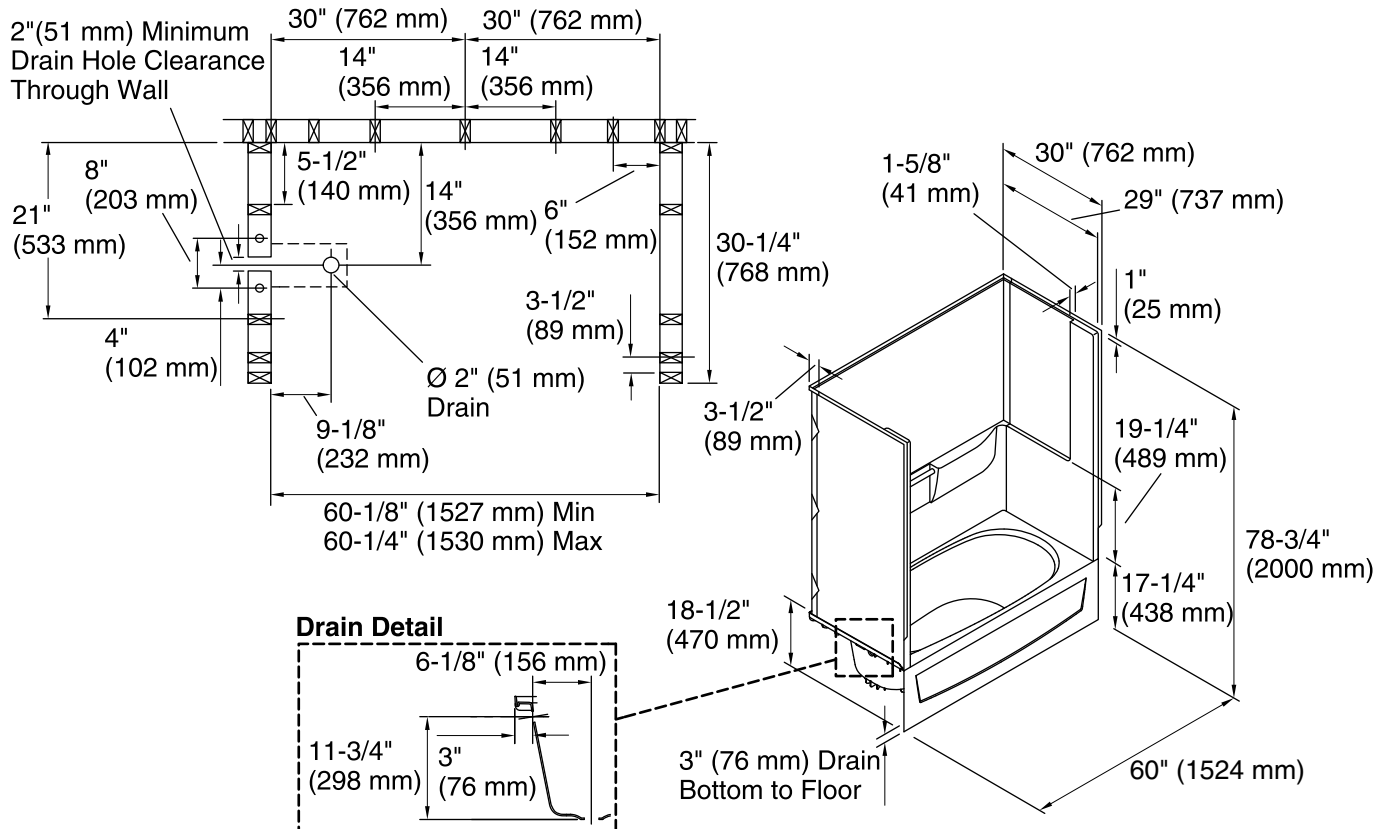

Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Left

Basin area, bottom: 21" x 39" (533 mm x 991 mm)

Basin area, top: 24" x 53" (610 mm x 1346 mm)

Water depth: 10-1/4" (260 mm)

Water capacity: 35 gal (132.5 L)

Minimum flat for door: 1-3/4" (44 mm)

Door height required: 59-1/2" (1511 mm)

Door width required: 56-3/4" (1441 mm)

Notes

Install this product according to the installation instructions.

Studs should be positioned roughly as shown.

Double studding is recommended for pivot shower door installations.