

STERLING®

A KOHLER COMPANY


ACCORD™

Features

- Compression molded from our exclusive solid Vikrell® material
- Bath and integral apron eliminates installation step
- Modular 4-piece design
- Tongue-and-groove "snap together" design
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- Wall surround allows for attachment of grab bars
- 20" (50.8 cm) bath depth (floor to top of threshold)
- 60" (152.4 cm) x 33-1/4" (84.5 cm) x 75-1/2" (191.8 cm) complete unit rough-in dimensions include flange
- 60" (152.4 cm) x 32" (81.3 cm) x 76-1/4" (193.7 cm) complete unit finished dimensions

60" (152.4 cm) AFD BATH AND WALL SURROUND WITH BACKER BOARDS

71150118
ALSO 71150128

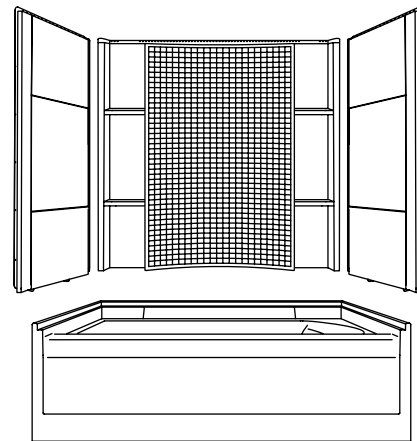

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45
- ASTM F462 Slip Resistance
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
71150118	60" (152.4 cm) AFD bath and wall surround with backer boards, above-the-floor left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
71150128	60" (152.4 cm) AFD bath and wall surround with backer boards, above-the-floor right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Model	Wall Component Description	Colors/Finishes	
71154106	Complete wall set with backer board locations	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

ACCORD™

Technical Information

Fixture*:	
Bathing well:	
Basin area	21-1/2" (54.6 cm) x 46-1/8" (117.2 cm)
Top area	22-7/8" (58.1 cm) x 50-7/8" (129.2 cm)
To overflow:	
Water depth	12-3/8" (31.4 cm)
Capacity	53 gal (199.2 L)
* Approximate measurements for comparison only.	

Model	door maximum width	door maximum height
71150118	56-3/4" (144.1 cm)	55-7/8" (141.9 cm)
71150128		

Installation Notes

Install this product according to the installation guide.


Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are to be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

Attach grab bars at the specified backer board locations only.

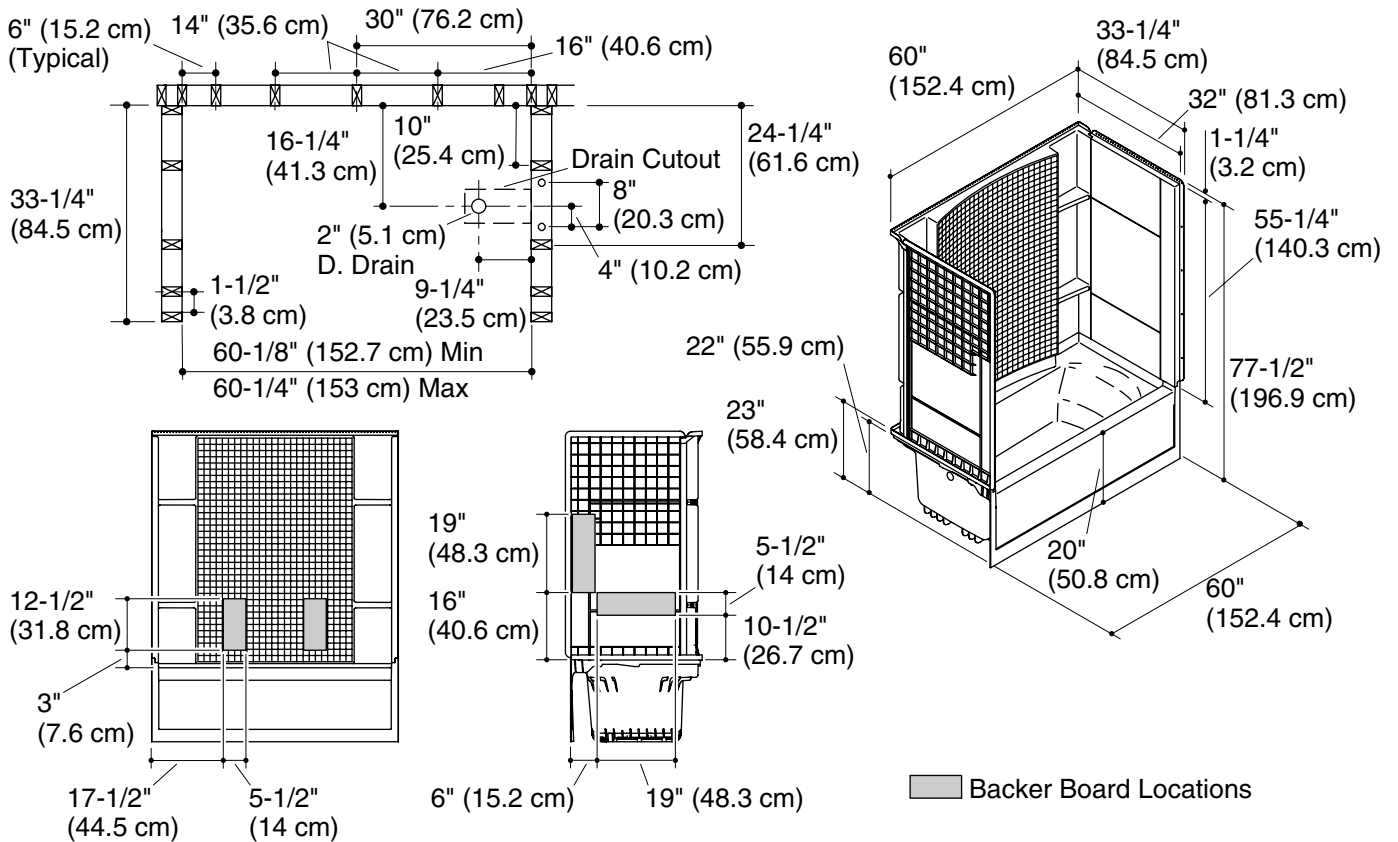

Product Diagram