

Features

- Durable high gloss finish.
- Suitable for tile down application or with STERLING wall surround.
- 42" (1067 mm) x 34" (864 mm) x 4-1/2" (114 mm) base finished dimensions.

Material

• Compression molded from our exclusive Vikrell[®] material.



42" Shower Base









Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold HUD, UM Bulletin 73

STERLING[®] Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color Code Description

\bigcirc	0	White	
<u> </u>	•		

96 Biscuit





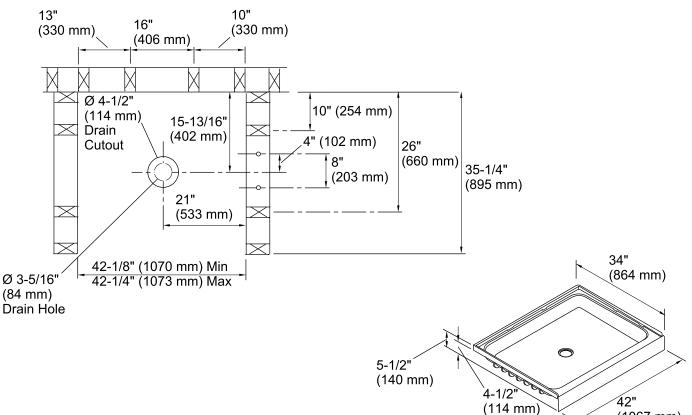

Technical Information

All product dimensions are nominal.Installation:3-Wall AlcoveDrain location:Center

Notes

Install this product according to the installation guide.

(1067 mm)

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown.