#### Location:



# **Tub-Shower System** 5502 Specification Submittal

#### **Feature Highlights**

- Symmons Tub-Shower System with lever handle
- Symmons Temptrol<sup>®</sup> pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Screwless escutcheon
- Showerhead #552SH three mode, 4 inch diameter
- Showerhead mounting bracket and flange
- Standard flow rate is 2.5 gpm (9.5 L/min) Optional lower flow rate restrictor available
- Tub spout with diverter, # 542TSD
- Polished chrome finish

#### **Model Numbers**

- 5502 Tub-Shower System with Symmons Temptrol<sup>®</sup> mixing valve p/n 4000-BODY
- □ 5502-TRM Trim only, mixing valve ordered separately
- □ 4000-BODY Symmons Temptrol<sup>®</sup> mixing valve without trim
- □ 4000-X-BODY Symmons Temptrol<sup>®</sup> mixing valve without trim. Valve includes integral service stops to allow water shut-off for service

## **Finish Options / Modifications**

Append appropriate -suffix to model number

- □ -STN Satin Nickel
- П -{
  - -SBZ Seasoned Bronze
    - Polished Chrome (standard finish)







## **Options / Modifications**

Append appropriate -suffix to model number


-IPS	1/2 inch female IPS connections on Temptrol <sup>®</sup> mixing valve
-X	Integral service stops included with Temptrol mixing valve to allow water shut-off for service, p/n 4000-X-BODY ( <i>option only</i> <i>applies when ordering model</i> 5502)
-CHKS	Check Stops: Temptrol® mixing valve includes integral check stops ( <i>Requires integral service stops, suffix -</i> X. Used in installations where a positive shut-off device is used downstream of mixing valve.)
-REV	Reverse core: Temptrol <sup>®</sup> mixing valve with reverse core. ( <i>Requires integral service</i> <i>stops, suffix -X</i> . Used in back-to-back system installations. HOT on the right, COLD on the left)
-L/HD	Showerhead not included. ( <i>includes showerhead arm and flange only</i> )
<b>/</b> -2.0	2.0 gpm (7.6 L/min) flow rate restrictor
-1.5	1.5 gpm (5.7 L/min) flow rate restrictor

## Standards / Certifications

ASME A112.18.1-2005 / CSA B125.1-05 Americans with Disabilities Act (ADA) compliant

#### Warranty

- Limited Lifetime to the original end purchaser in consumer installations
- 5 years for commercial installations

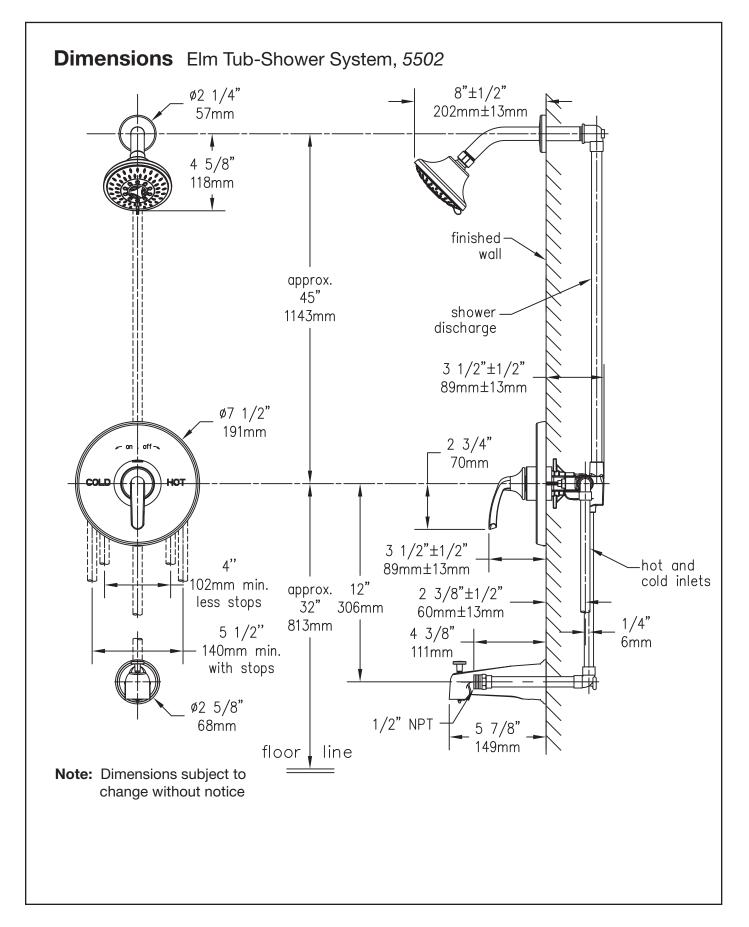

Symmons Industries, Inc. = 31 Brooks Drive = Braintree, MA 02184 = (800)796-6667, (781)848-2250 = Fax: (800)961-9621, (781)664-1300 ©2012 Symmons Industries, Inc. = Printed in U.S.A. = www.symmons.com = customerservice@symmons.com = 031312