




Architect/Engineering Specifications:

Single hole single temperature deck mount faucet with polished chrome plated brass body, 24" double joint swing nozzle, on-off volume control outlet with insulated grip, compression cartridge with spring check, lever handle and 1/2" NPSM male inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

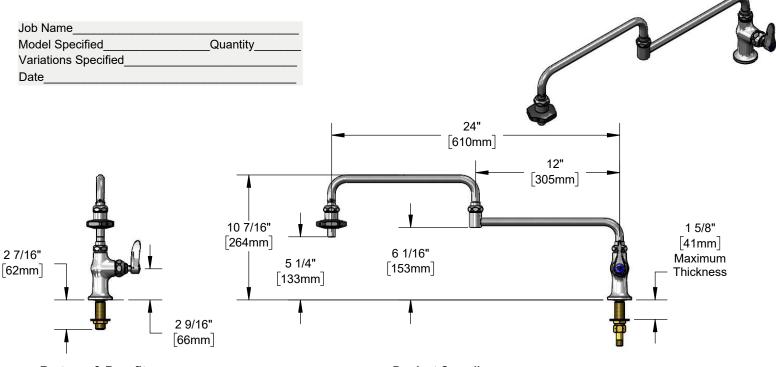

Features & Benefits:

- · Single hole single temperature deck mount pot filler faucet
- 24" double joint swing nozzle
- · Lock washer provided for rigid application
- On-off volume control outlet with insulated grip
 Quarter-turn Eterna compression cartridge w/
- Quarter-turn Eterna compression cartridge w/ spring check
- Lever handle w/ color coded index
- 1/2" NPSM male inlet
- Tailpiece and nut to provide 1/4" NPT male connection
- Material: Polished chrome plated brass body &
 - tubular spout and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 125 psi
- Temperature: 40 °F 140 °F
- Flow Rate: 5.23 GPM @ 60 psi





Optional Handles

Optional Cartridges With Checks

□ 4" Wrist Action□ Lever (Standard)□ 4-Arm

□ Quarter-Turn Cerama w/ Check Valve □ Quarter-Turn Eterna w/ Spring Check (Standard)



