
TAG:	


Single Lever Faucet

Architect/Engineering Specifications:

Deck mount single lever faucet with polished chrome plated brass body, integral 9" swivel spout, polished chrome plated deck plate, 2.2 GPM aerator, ceramic cartridge with adjustable temperature limit stop, single lever handle, 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections, side spray with 4 ft. hose and hose guide. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name	
Model Specified	Quantity
Variations Specified	
Date	

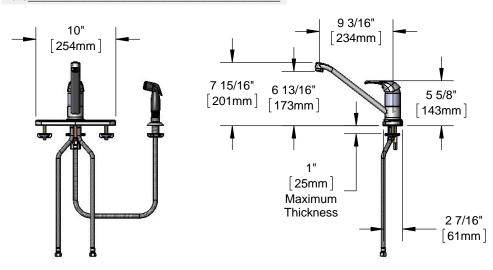




Features & Benefits:

- Deck mount single lever faucet with polished chrome plate brass body with integral 9" swivel spout
- Polished chrome plated brass 10" deck plate (Fits 8" Hole Centers)
- 9" swivel spout
- 2.2 GPM aerator, Series 4 (B-0199-04)
- Ceramic cartridge w/ adjustable temperature limit stop
- Single lever handle w/ color coded index
- 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections
- · Side spray with 4 ft. hose and hose guide
- Material: Polished chrome plated brass body & deck plate, chrome plated metal handle and stainless steel hoses

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



Ceramic Cartridge: Two Year (Limited)



ADA Compliant

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40°F - 140°F
Flow Rate: 2.2 GPM @ 60 psi



GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Accessories
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035	□ Cover Plate w/ Side
0.5	N/A	□ B-0199-04-N05	N/A	□ B-0199-09-N05	Spray Hole
1.0	N/A	N/A	N/A	□ B-0199-09-LF-10	□ 7ft Long Side Spray
1.5	□ B-0199-04-WS	N/A	□ B-0199-09-WS	□ B-0199-09-LF-15	□ 6" Long Handle
2.2	Standard	□ B-0199-25	□ B-0199-09	□ B-0199-27	-







T&S BRASS AND BRONZE WORKS, INC.



