

Cam Head



DESCRIPTION

Clean-lined head rotates 360° around stem; pivots 340°. Low-voltage, MR16 lamp of up to 75 watts (not included).

SYSTEM

Available for FreeJack, MonoRail, Two-Circuit MonoRail, and Wall MonoRail. For use on T-trak, order FreeJack version and T-trak FreeJack Connector (sold separately).


INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

WEIGHT

0.26-0.86lb / 0.12-0.39kg

ORDERING INFORMATION

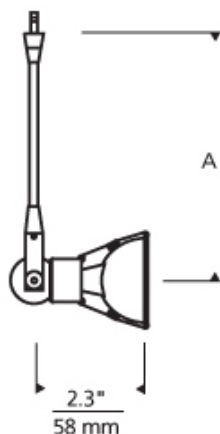

700	SYSTEM	CAM	LENGTH	FINISH
FJ	FREEJACK (MONO POINT)		03 3"	C CHROME
MO	MONORAIL		06 6"	S SATIN NICKEL
MO2	TWO-CIRCUIT MONORAIL		12 12"	
WMO	WALL MONORAIL		18 18"	
			24 24"	



TECH LIGHTING®

7400 Linder Avenue T 847.410.4400
 Skokie, Illinois 60077 F 847.410.4500

www.techlighting.com

700 _____ CAM _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____

