


Tigris Mirror Oval Surface (Compact Fluorescent)

700BCTIGOS26_-CF 1.1



GENERAL PRODUCT INFORMATION:

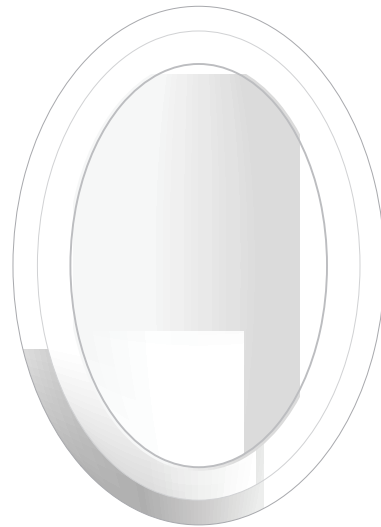


This product is suitable for damp locations.

Bring 120 Volt power supply to the mirror in accordance with local electrical codes.


This instruction shows a typical installation.

CAUTION—RISK OF FIRE
 This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN THE POWER TO THE ELECTRICAL BOX OFF.**

Install the Hardware

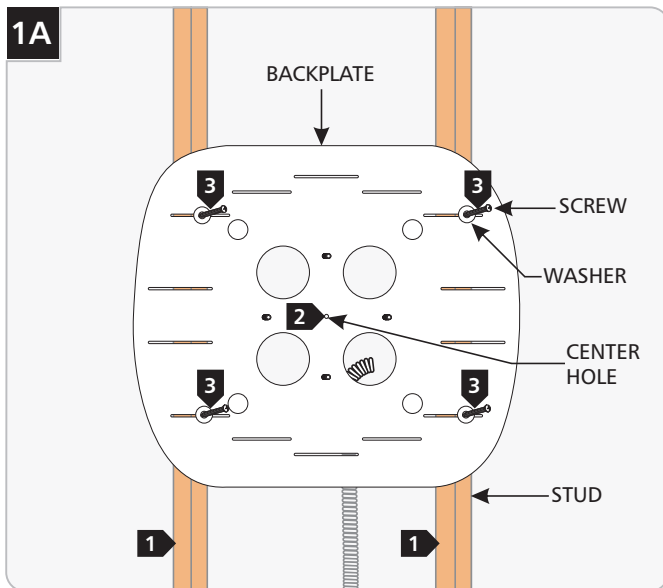


- 1** Locate the studs on the wall where the mirror is going to be mounted (Max 22-1/2" separation).
- 2** If necessary, use the center hole on the backplate to position the backplate on the wall.
- 3** Use minimum of four slots to mount the backplate to the studs with four screws and washers provided. Do not drive the screws all the way in at this time.

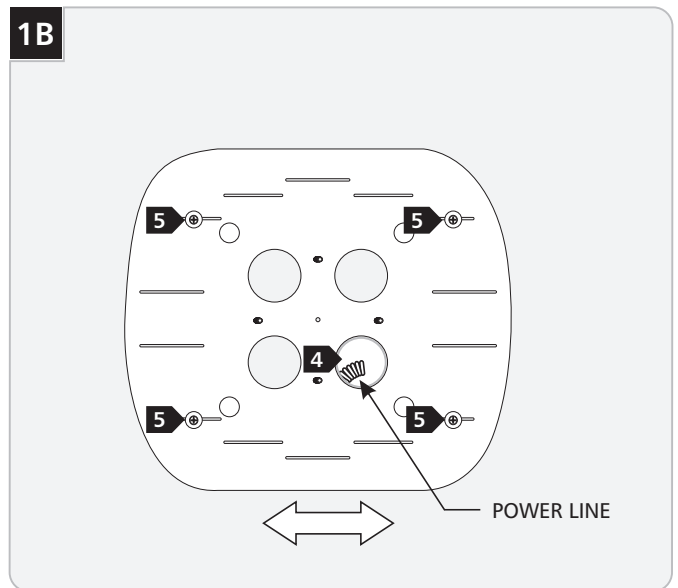


- 4** Bring the power line to one of the four circular holes on the backplate.
- 5** While holding the backplate level and in the desired position, tighten the four screws to secure it.

Prepare the Mirror for Installation

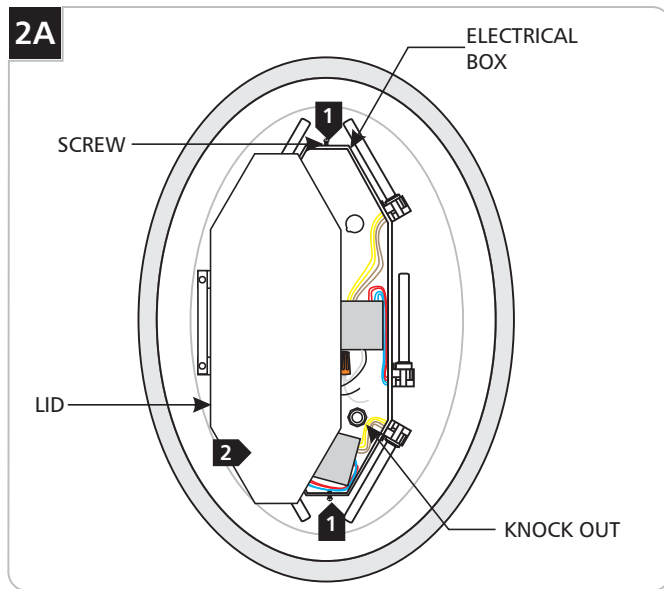


- 1** Remove the two screws on top and bottom of the electrical box in the center of the pan.
- 2** Remove the electrical box lid.
- 3** Remove one knockout and install the provided conduit connector.

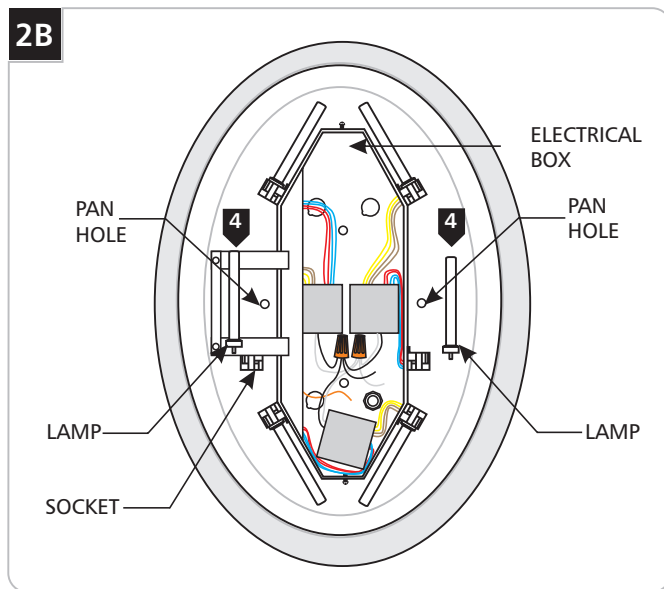


- 4** Pull out the lamps on the left and right side. This will clear the two side pan holes for installation.

Install the Pan

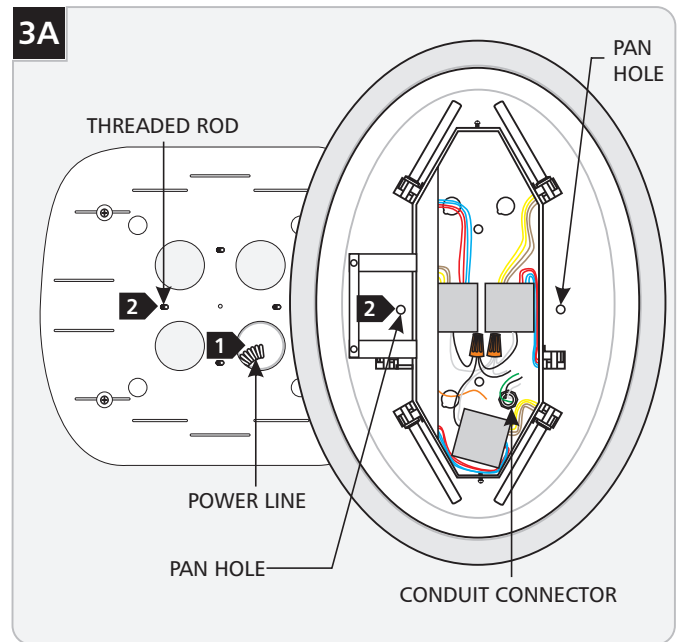


- 1** Feed the power line wire through the conduit connector into the pan.
- 2** Place the pan holes onto the backplate threaded rods.

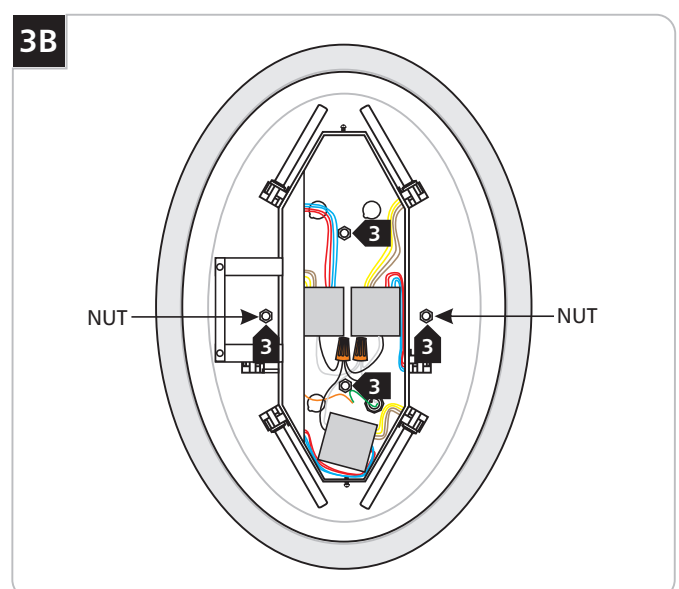

- 3** Tighten the nuts to secure the pan onto the backplate.
- 4** Refer to "Replace the Lamps" on page 4 to replace the lamps.

Connect Power


4A

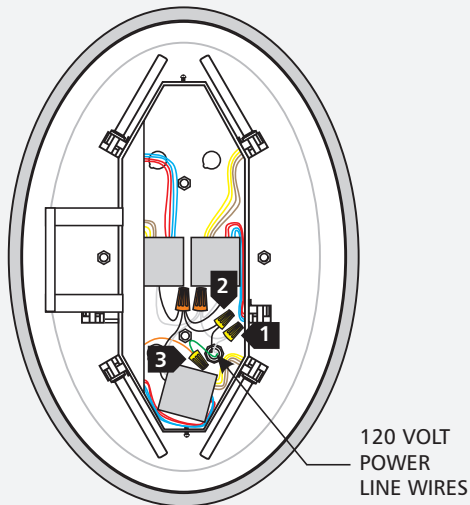

- 1 Connect the neutral 120 volt power line wire to the loose white fixture wire with a wire nut.
- 2 Connect the hot 120 volt power line wire to the loose black fixture wire with a wire nut.
- 3 Connect the stranded copper wire to ground in accordance with local electrical codes.
- 4 Refer to "Replacing the Lamps" on page 4 to replace the lamps.


Attach the Mirror

5A

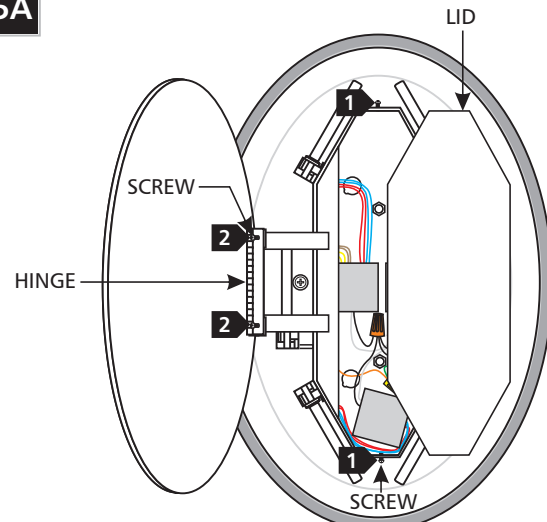

- 1 Replace the lid onto the electrical box and tighten the two screws.
- 2 Carefully attach the mirror onto the hinge and tighten the two screws.

Replace the Lamps

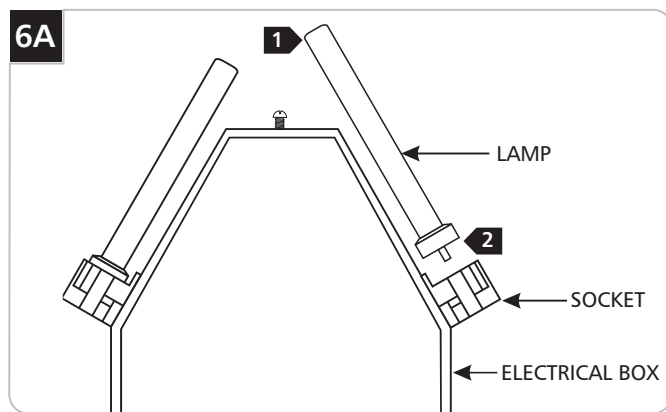

Use **MAX 9 Watt** Twin-Tube Compact Fluorescent Lamp.



NOTE: Use only your fingers to replace the lamp.

- 1 Pull out the old lamp.
- 2 Push the new lamp pins firmly all the way into the socket holes.

SAVE THESE INSTRUCTIONS!



TECH LIGHTING®

7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.
A Generation Brands Company