

# INSTALLATION INSTRUCTIONS

Model # 8906/8909

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARING FOR INSTALLATION (Fig.1)

1. Shut off power at the circuit breaker and remove the old fixture including mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.

## CONNECTION THE WIRES (Fig. 2)

3. While supporting the fixture connect electrical wires as shown in (Fig. 2). If your post has a ground wire (green or bare copper), connect the fixture's ground wire to it. If not, consult your electrician for proper grounding. After the wires are connected, tuck them carefully inside the post cup (H).

## FINISHING THE INSTALLATION (Fig.1)

4. Align the fixture with the post and secure with screws (H). (Fig.1)
- 10 Remove finial (A) followed by hex-nut (B), top cover (C), top cover (D) and decorative ring (E) to install the bulb(s) type B/E12 (not included) in accordance with the fixture specification. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
- 11 Align decorative ring (E) followed by top cover (D) and top cover (C) and secure with hex-nut (B) and finial (A).

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1


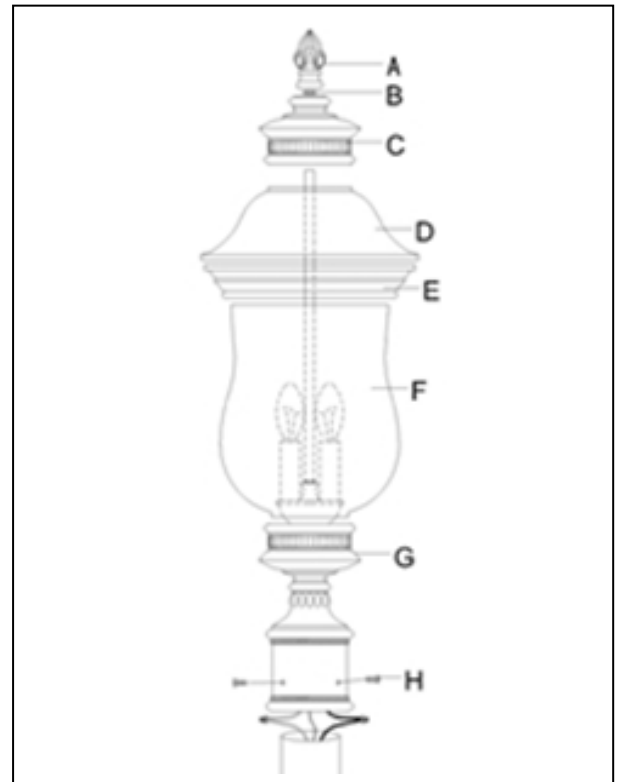


Fig.2



**“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”**

**ATTENTION – RISQUE D’INCENDIE. CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.**

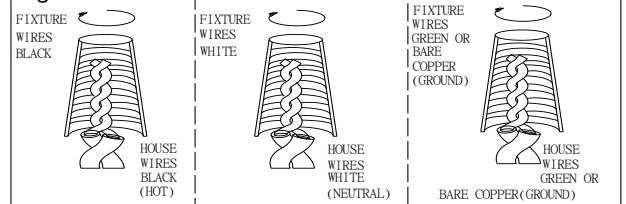