

### FEATURES

- 71-1/2" x 36-3/16" x 24-1/16"
- Luxuriously deep bathing well
- Cast-acrylic construction provides high durability
- Slip-resistant surface
- 1hp ultra-quiet blower
- 300 watt heated air injection system
- Final purge/drying cycle to clean each air jet
- Drain with various finishes
- LED lighting
- Multi-functional Remote
  - Normal Mode: Fully adjustable massage level for just the right amount of comfort
  - Pulsating Mode: Powerful, penetrating massage
  - Oscillation Mode: Wave-like, soothing massage
- 2 Pillows

### MODELS

- ABA626T  
Acrylic bathtub. Slip-resistant surface.  
Remote Control with light.  
Left Blower
- ABA626S  
Acrylic bathtub. Slip-resistant surface.  
Remote Control with light.  
Right Blower

### COLORS/FINISHES

- Shell Color
  - #01 Cotton
  - #12 Sedona Beige
- Drain
  - #CP Polished Chrome
  - #BN Brushed Nickel
  - #PN Polished Nickel
- Jet Trim
  - Color matched caps
- Pillows
  - Neutral White

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.7M, CSA B45.10, UL 1795, CSA C22.2 #218.2
- Certifications: IAPMO(cUSPC), Intertek/ETL, State of Massachusetts, City of Los Angeles and others
- Code Compliance: USPC, IPC, NSPC, NPC Canada, and others



### PRODUCT SPECIFICATION

The TOTO® Aimes® Airbath™ shall have a luxuriously deep bathing well. The Airbath shall have a cast-acrylic construction that provides high durability with a slip-resistant surface. The Airbath shall have a 1hp ultra-quiet blower, a 300 watt heated air injection system and a final purge/drying cycle to clean each air jet. The Airbath shall have a drain with various finishes, LED lighting and a multi-functional remote. Airbath shall be TOTO Model ABA626\_\_\_\_.

# ABA626


Aimes® 6' Airbath™

## SPECIFICATIONS

- Size 71-1/2" L x 36-3/16" W x 24-1/16" H
- Depth 19"
- Warranty 1 Year Limited Warranty on acrylic tub  
1 Year Limited Warranty on components and parts
- Material Cast Acrylic construction
- Electrical Requirements 15 AMP; 120V w/ GFCI
- Shipping Weight 199 lbs.
- Shipping Dimensions 74-1/2" L x 45" W x 27-1/2" H
- Gallons 88 to overflow

## INSTALLATION NOTES

Floor support under bath must provide a minimum of 75 lbs/square foot (366 kg/square meter) loading.

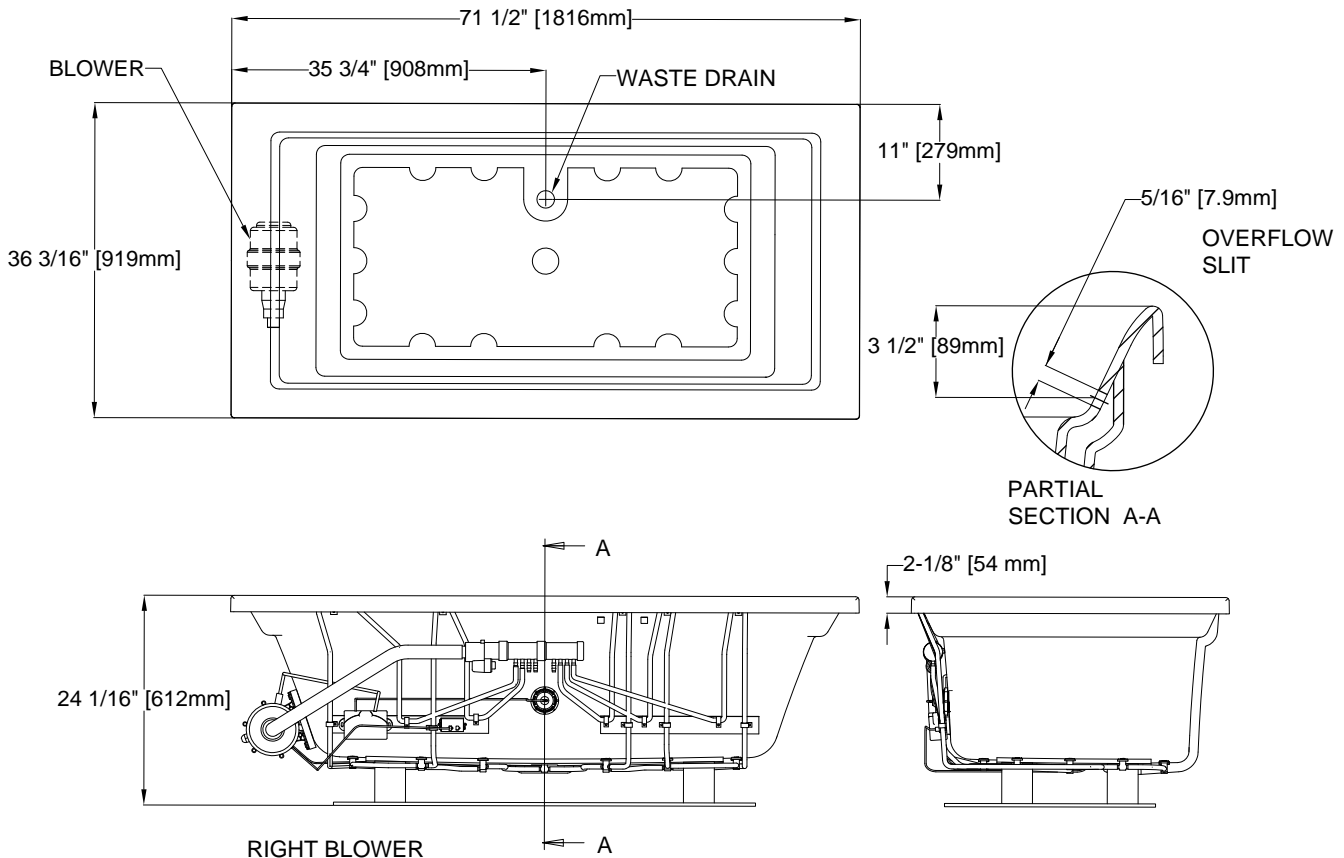

**TOTO®**

*These dimensions and specifications are subject to change without notice*