

TOTO®


MS756204SF Mercer® Close Coupled Toilet, 1.6 GPF




MS756204SF - Mercer® Close Coupled Toilet with SoftClose® Oval Seat



G-Max™ Flushing Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet.

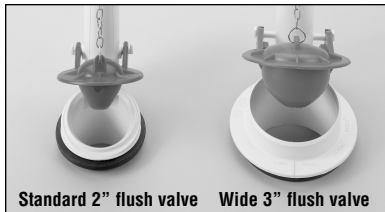

Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Unique sculpted design, close coupled toilet with SoftClose® Oval seat
- Universal Height 16-1/8" rim height
- G-Max® flushing technology
- Powerful, quiet flush every time
- Large water surface
- Designer Suite:
Matching Mercer® pedestal and vessel lavatories

Decorative, ADA compliant, high profile close coupled toilet. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ MS756204SF

Elongated, 12" rough-in, with SoftClose® Oval seat

□ CM756204SF

Elongated bowl and SoftClose® Oval seat only, 12" rough-in.

□ ST755S

Mercer® tank and cover only. Complete with tank trim and coupling components.

□ SS204

SoftClose® Oval: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

Colors:

Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone
#51 Ebony

Trip Lever:

Standard #01 Cotton
Optional See price book for additional finishes

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



ADA Compliant

For installation condition with approach from the left hand side.

MS756204SF

Mercer® Close Coupled Toilet, 1.6 GPF

■ PERFORMANCE

The TOTO® G-Max® low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf
Flush System: Gravity Feed (G-Max® System)
Min. Water Pressure: 8 psi
Water Surface: 10-1/2" x 8-1/4"
Trap Diameter: 2-1/8"
Rough-in: 12" rough-in
Trapseal: 2-1/4"
Warranty: One Year Limited Warranty
Material: Vitreous china

Shipping Weight: **CM756204SF** 74.5lbs.
ST755S 31.3lbs.

Shipping Dimensions: **CM756204SF**
30-1/8"L x 16-3/4"W
x 22"H
ST755S
8-7/8"L x 20-5/8"W x 18-3/8"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from the left hand side. Recommended seat: SS204

These dimensions and specifications are subject to change without notice.

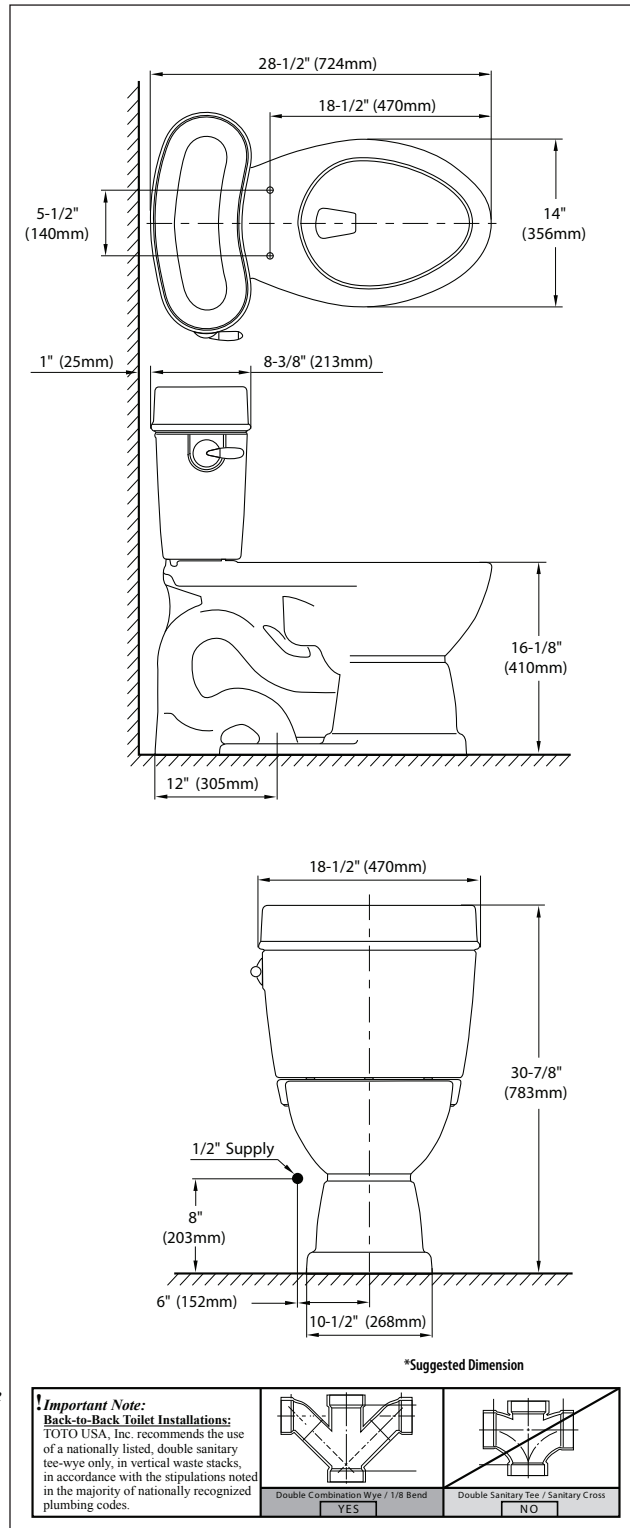

MS756204SF - Mercer® Close Coupled Toilet with SoftClose® OvalSeat

TOTO®

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com

Printed in U.S.A. © TOTO LTD. 08/04 #A10210

Printed on recycled paper