

VSL 400 SERIES RANGE HOOD LINERS FOR REMOTE/IN-LINE BLOWERS

PERFORMANCE · QUALITY · CUSTOMER SERVICE

QUIET OPERATION

- Variable rotary blower control reduces blower and air movement sound level
- Sound absorbing duct silencers are available

EASE OF OPERATION

- Adjusting the CFM is easy with the variable control
- · Bright, dimmable LED lights
- Slip resistant control knobs

DISTINCTIVE LOW-PROFILE DESIGN

- Low-profile allows for flexible design options
- Style complements ALL custom and manufactured wood hood designs
- Simplicity of design preferred by homeowners

EASY CLEANING

- Dishwasher-safe commercial-style baffle filters with 2 easy-grip handles
- Detergent inlet holes and grease exit holes in baffle filters for superior dishwasher cleaning


SIMPLE INSTALLATION

- Installs easily in standard size or custom-built wood range hoods
- Wiring diagram label for simple electrical connection
- Pre-wired for use with single-speed in-line or external blowers


ENDURING QUALITY

 Commercial grade stainless steel (#304 grade) and galvanized steel construction



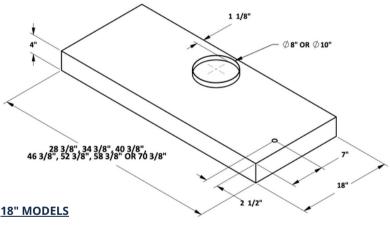




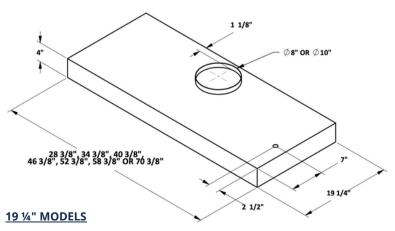



VSL 400 SERIES RANGE HOOD LINERS FOR REMOTE/IN-LINE BLOWERS

| MODEL | FRONT TO BACK | WIDTH | COLOR | LED LIGHTS | S/S BAFFLE FLITERS | REMOTE CONTROL | DUCT COLLAR | VARIABLE ROTARY CONTROL |
|---------------|------------------|-------|-------|---------------|-----------------------|-------------------|----------------|-------------------------------|
| VSL430BF | 18" | 28 %" | S/S | 2 | √ | N/A | 8" | √ |
| VSL436BF | 18" | 34 %" | S/S | 2 | √ | N/A | 8" | √ |
| VSL436-0-19BF | 19 ¼" | 34 %" | S/S | 2 | √ | N/A | 8" | √ |
| VSL436-0-22BF | 22 | 34 %" | S/S | 2 | ✓ | N/A | 8" | √ |
| VSL442BF | 18" | 40 %" | S/S | 2 | √ | N/A | 10" | √ |
| VSL442-0-19BF | 19 ¼" | 40 %" | S/S | 2 | √ | N/A | 10" | √ |
| VSL442-0-22BF | 22" | 40 %" | S/S | 2 | √ | N/A | 10" | √ |
| VSL448BF | 18" | 46 %" | S/S | 3 | ✓ | N/A | 10" | √ |
| VSL448-0-19BF | 19 ¼" | 46 %" | S/S | 3 | √ | N/A | 10" | √ |
| VSL448-0-22BF | 22" | 46 %" | S/S | 3 | ✓ | N/A | 10" | √ |
| VSL454BF | 18" | 52 %" | S/S | 3 | √ | N/A | 10" | √ |
| VSL454-0-19BF | 19 ¼" | 52 %" | S/S | 3 | ✓ | N/A | 10" | √ |
| VSL454-0-22BF | 22" | 52 %" | S/S | 3 | √ | N/A | 10" | √ |
| VSL460BF | 18" | 58 %" | S/S | 3 | ✓ | N/A | 10" | √ |
| VSL460-0-19BF | 19 ¼" | 58 %" | S/S | 3 | √ | N/A | 10" | √ |
| VSL460-0-22BF | 22" | 58 %" | S/S | 3 | √ | N/A | 10" | √ |
| VSL472BF | 18" | 70 %" | S/S | 4 | √ | N/A | 10" | √ |
| VSL472-0-19BF | 19 ¼" | 70 %" | S/S | 4 | √ | N/A | 10" | √ |
| VSL472-0-22BF | 22" | 70 %" | S/S | 4 | √ | N/A | 10" | √ |

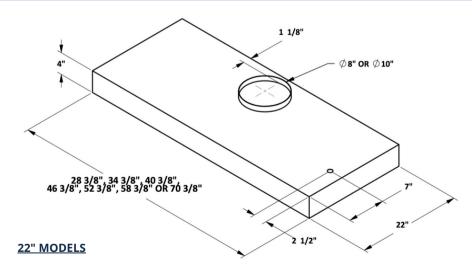

For more information, please contact your dealer or your TRADE-WIND® representative.



8 0 0 WEST GRANT STREET PHOENIX, AZ 8 5 0 0 7 1 - 8 0 0 - 9 5 5 - 5 7 3 7 6 0 2 - 9 0 0 - 8 5 0 0

T-WUSA.COM



TRADE-WIND Manufacturing, LLC has a policy of continuous improvements and reserves the right to modify (at any time without notice) any or all of its products, features, designs, components and specifications. For further information on installation and wiring, see the installation instructions included with the product or visit us on the web.