

Air Bear[®] Supreme

Media Whole-House Air Cleaner



PERFORMANCE:

Rated air flow up to 2000 cfm

Non-woven, 5-inch thick, pleated Air Bear media filter traps particles as small as one micron

Tested using ANSI/ASHRAE 52.2 - 2007 standard procedures

Efficiency rating of MERV 8 or MERV 11

FEATURES:

Quick and easy installation

Air Bear filters capture and hold pollutants inside the filter, allowing air to flow freely through the system

Highly-efficient, 100% electrostatically-charged synthetic material. Features extended surface pleats that have a higher dirt-holding capacity than competitive filters.

Available in a wide variety of sizes

Mounts directly to heating and cooling systems



Suitable for use with all types of central forced-air configurations

Rugged cabinet construction for long life

Air Bear[®] Supreme

MODEL	AIR BEAR [®] SUPREME 2000		AIR BEAR [®] SUPREME 1400	AIR BEAR [®] SUPREME 20 x 20
PART NO.	455602-019	459200-005	455602-119	455604-019
RATED AIR FLOW	2000 cfm (3398 m ³ /hr)	2000 cfm (3398 m ³ /hr)	1400 cfm (2379 m ³ /hr)	1400 cfm (2379 m ³ /hr)
MERV RATING	8	11	8	8
MEDIA SIZE INCHES (mm)	5 D x 20 H x 24 1/4 W (127 x 508 x 616)	5 D x 20 H x 24 1/4 W (127 x 508 x 616)	5 D x 16 H x 24 1/4 W (127 x 406 x 616)	5 D x 20 H x 20 1/4 W (127 x 508 x 527)
SHIPPING WEIGHT LBS (kg)	20 (9.07)	20 (9.07)	15 (6.07)	19 (8.62)
OPTIONAL ACCESSORIES	Pre-Filter Charcoal After-Filter	Pre-Filter Charcoal After-Filter	Pre-Filter Charcoal After-Filter	Pre-Filter Charcoal After-Filter
DIMENSIONS INCHES (mm)				
A	7 1/8 (181)	7 1/8 (181)	7 1/8 (181)	7 1/8 (181)
B	24 7/8 (632)	24 7/8 (632)	24 7/8 (632)	21 3/8 (543)
C	20 1/4 (514)	20 1/4 (514)	16 1/4 (413)	20 1/4 (514)
DUCT OPENING INCHES (mm)				
D	22 1/2 (572)	22 1/2 (572)	22 1/2 (572)	19 (483)
E	17 7/8 (454)	17 7/8 (454)	13 7/8 (352)	17 7/8 (454)
RESISTANCE				
CFM (m ³ /hr)	INCHES W.G. / PASCALS			
600 (1019)	.03 (7.5)	.05 (12.5)	.04 (9.9)	.04 (9.9)
800 (1359)	.05 (12.4)	.07(18)	.08 (19.9)	.08 (19.9)
1000 (1699)	.07 (17.4)	.09 (23)	.12 (29.8)	.12 (29.8)
1200 (2039)	.10 (24.9)	.12 (80)	.18 (44.8)	.18 (44.8)
1400 (2379)	.14 (34.8)	.17 (43)	.24 (59.7)	.24 (59.7)
1600 (2718)	.18 (44.8)	.21 (53)	—	—
1800 (3058)	.22 (54.7)	.26 (65)	—	—
2000 (3398)	.27 (67.1)	.32 (80)	—	—

Air Bear[®] Air Cleaners have been tested using ANSI / ASHRAE 52.2-2007 standard test procedures.

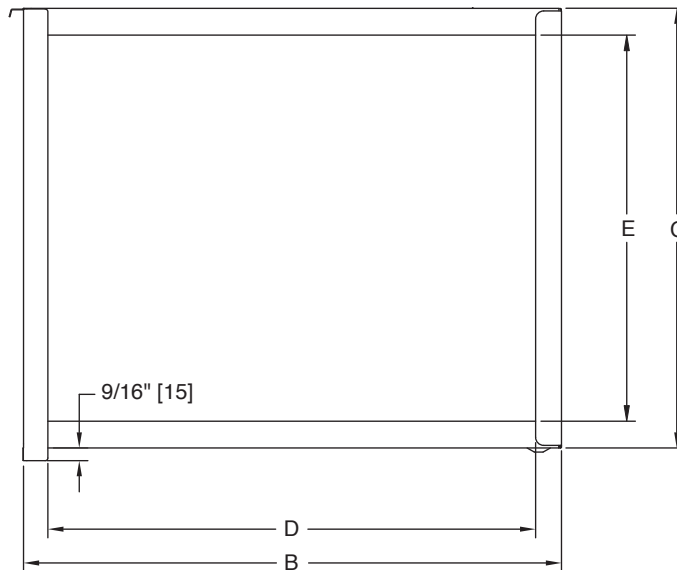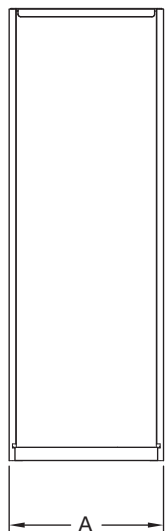

Trion, Inc.
 101 McNeill Road
 Sanford, NC 27330
 Phone: 800 884-0002 Fax: 800-458-2379
 Website: www.trioninc.com
 Email: sales@trioninc.com

All product specifications reflect available information at the printing of this brochure. Trion reserves the right to revise or modify products and/or specifications without notice. ©2007 Trion, Inc. Trion and Air Bear are registered trademarks of Trion, Inc.